
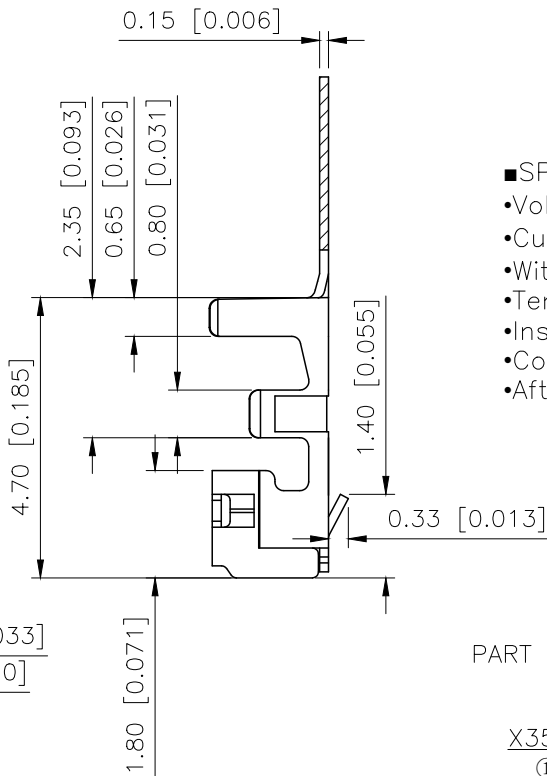


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.29	阿树

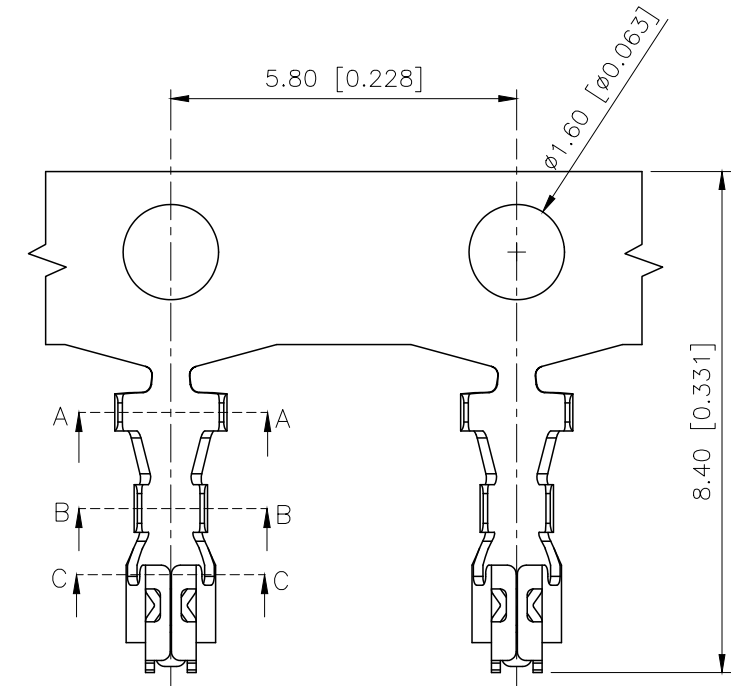


■SPECIFICATIONS

- Voltage rating:125V AC/DC
- Current rating:2A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:−40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤30mΩ


PART NO.:

X3535 I-P SN
① ② ③ ④


- ①Series Number.
②Category: T-terminal
③Material: P-Phosphor bronze
④Plating Category:SN-Bright Tin Plating




SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1

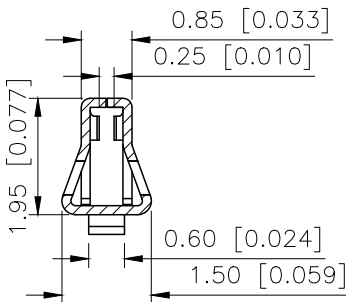

SECTION:C-C
SCALE:1:1

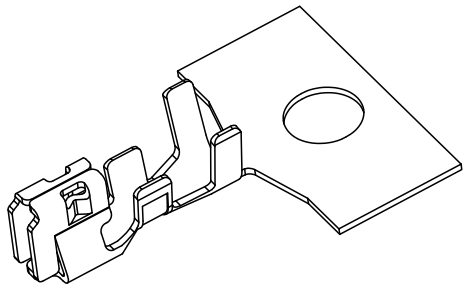

X3535T-PSN		Phosphor Bronze		AWG#24-30		1.40mm(Max) Plating:30u"MIN.Ni;70u"MIN.Sn		Stamping Before		X3535H			
PART NO		Material		Wire Rang		Insulation OD		Finish		Suitable XKB Housing			
		DESIGN		阿树		VIEW: 		MODEL TYPE: 2.00mm Crimp Style Connector					
		CHECKED				UNIT: mm/in		PART NO.: X3535T-PSN					
		APPROVED				SIZE: A4		DWG NO.:					
XKB INDUSTRIAL PRECISION CO.,LIMITED								SCALE		PAGE		REVISION	
								N/A		1/1		A1	