



EICHHOFF



Built-in switch
with restart protection due to voltage loss



3251-20-01, 3251-21-01



pic.: 3251-21-01

push button operated, flange mounting

standard type:

3251-20-01; 230V / 50 Hz

ID: 510946

3251-21-01; 230V / 50 Hz

ID: 511074

(ext. coil connection)

other designs

(without approvals):

3251-2X-03 115 V / 50 Hz

3251-2X-04 115 V / 60 Hz

3251-2X-05 230 V / 60 Hz

3251-2X-06 240 V / 50-60 Hz

tested in conformity with:

DIN/VDE 0660 part 102;

IEC 947-4-1

id. card no.:06661 ÜG;

CB - zert. no.:DE1 - 7429

protection class:

IP 65 (frontside)

switching current:

AC-1: 16A 230V

AC-3: 14,5A 230V

accessory:




pic.: cover ID: 511537
AAE003-251/Z037




pic.: 3251-21-01/10
ID: 511646

protection class:
protection against
coarse pollution
(frontside)
other data see
standard type


drawing:

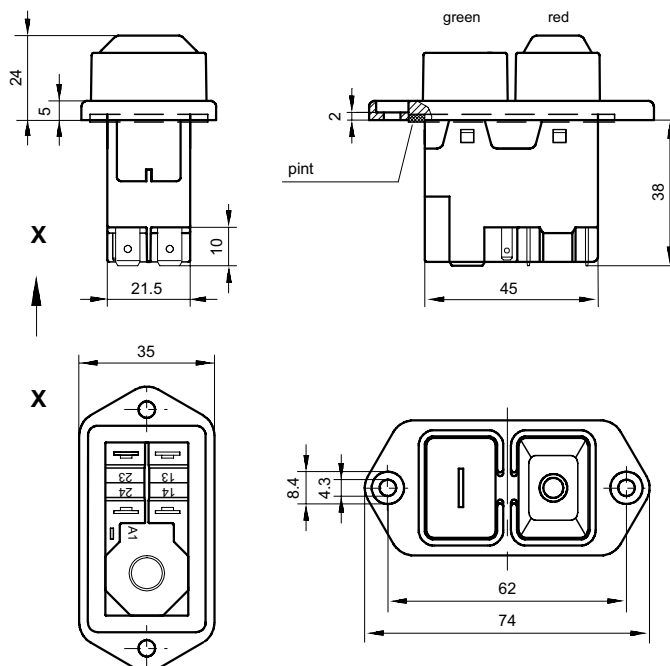

circuit diagram:



E 3251-20-01



E 3251-21-01