


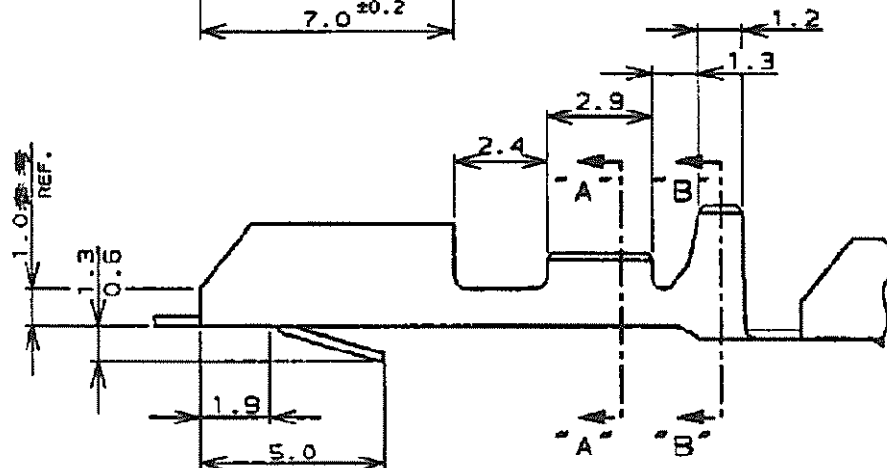
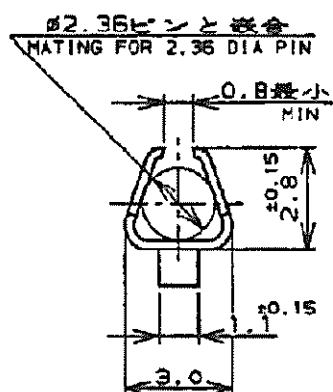


LOC	DTST	REVISIONS					
J		P	LTR	DESCRIPTION	DATE	DWN	APVD
			M1	REVISED PER ECR-15-005548	15APR2015	NK	LP
			M2	REVISED PER ECR-17-016303	15NOV2017	BDA	FV

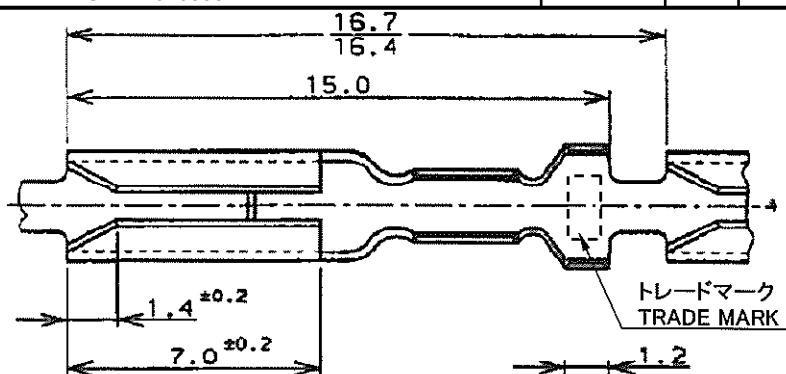


SECTION "A" - "A"
SECT.

SECTION "B" - "B"
SECT.

OBSOLETE	-	-	1470073-2
OBSOLETE	—	實鋼0.25t (BRASS)	170073-7
	錫めっき済・焼青銅0.25t (PRE-TIN PHOS. BRONZE)		170073-6
	錫めっき済・實鋼0.25t (PRE-TIN BRASS)		170073-5
	錫めっき (POST-TIN)	實鋼0.25t (BRASS)	170073-2
	仕上 (FINISH)	材料 (MATERIAL)	型番 (PART NO.)

WIRE RANGE 地合電線断面積	INSULATION DIA 被覆外径
0.2~0.56mm ² (AWG#24~#20)	1.2~2.79mm

DIMENSIONS: 單位 吋 mm	DRAWN <i>N. Nodabara</i> 4/24/96 CHK <i>S. Sasaki</i> 24 APR 96 APVD <i>S. Sasaki</i> 25 APR 96	MATERIAL 材料 SEE TABLE	FINISH 仕上 SEE TABLE
TOLERANCES UNLESS OTHERWISE SPECIFIED. 一般公差 10% ±0.2 20% ±0.25 100% ±0.3 ASME ±0.3* ±0.25 ±1°0'	PRODUCT SPEC. 製品規格 108-5014 108-5054	 TE Connectivity	
	APPLICATION SPEC 取付適用規格 WEIGHT	NAME 名称 ø2.36用 ピン リセプタクル 2.36 DIA PIN RECEPTACLE	
		SIZE A4	CAGE CODE 00779
		DRAWING NO 番号 C-170073	
CUSTOMER DRAWING		SCALE 尺度 1:5	SHEET 1 OF 1 REV M2

顧客用図面