


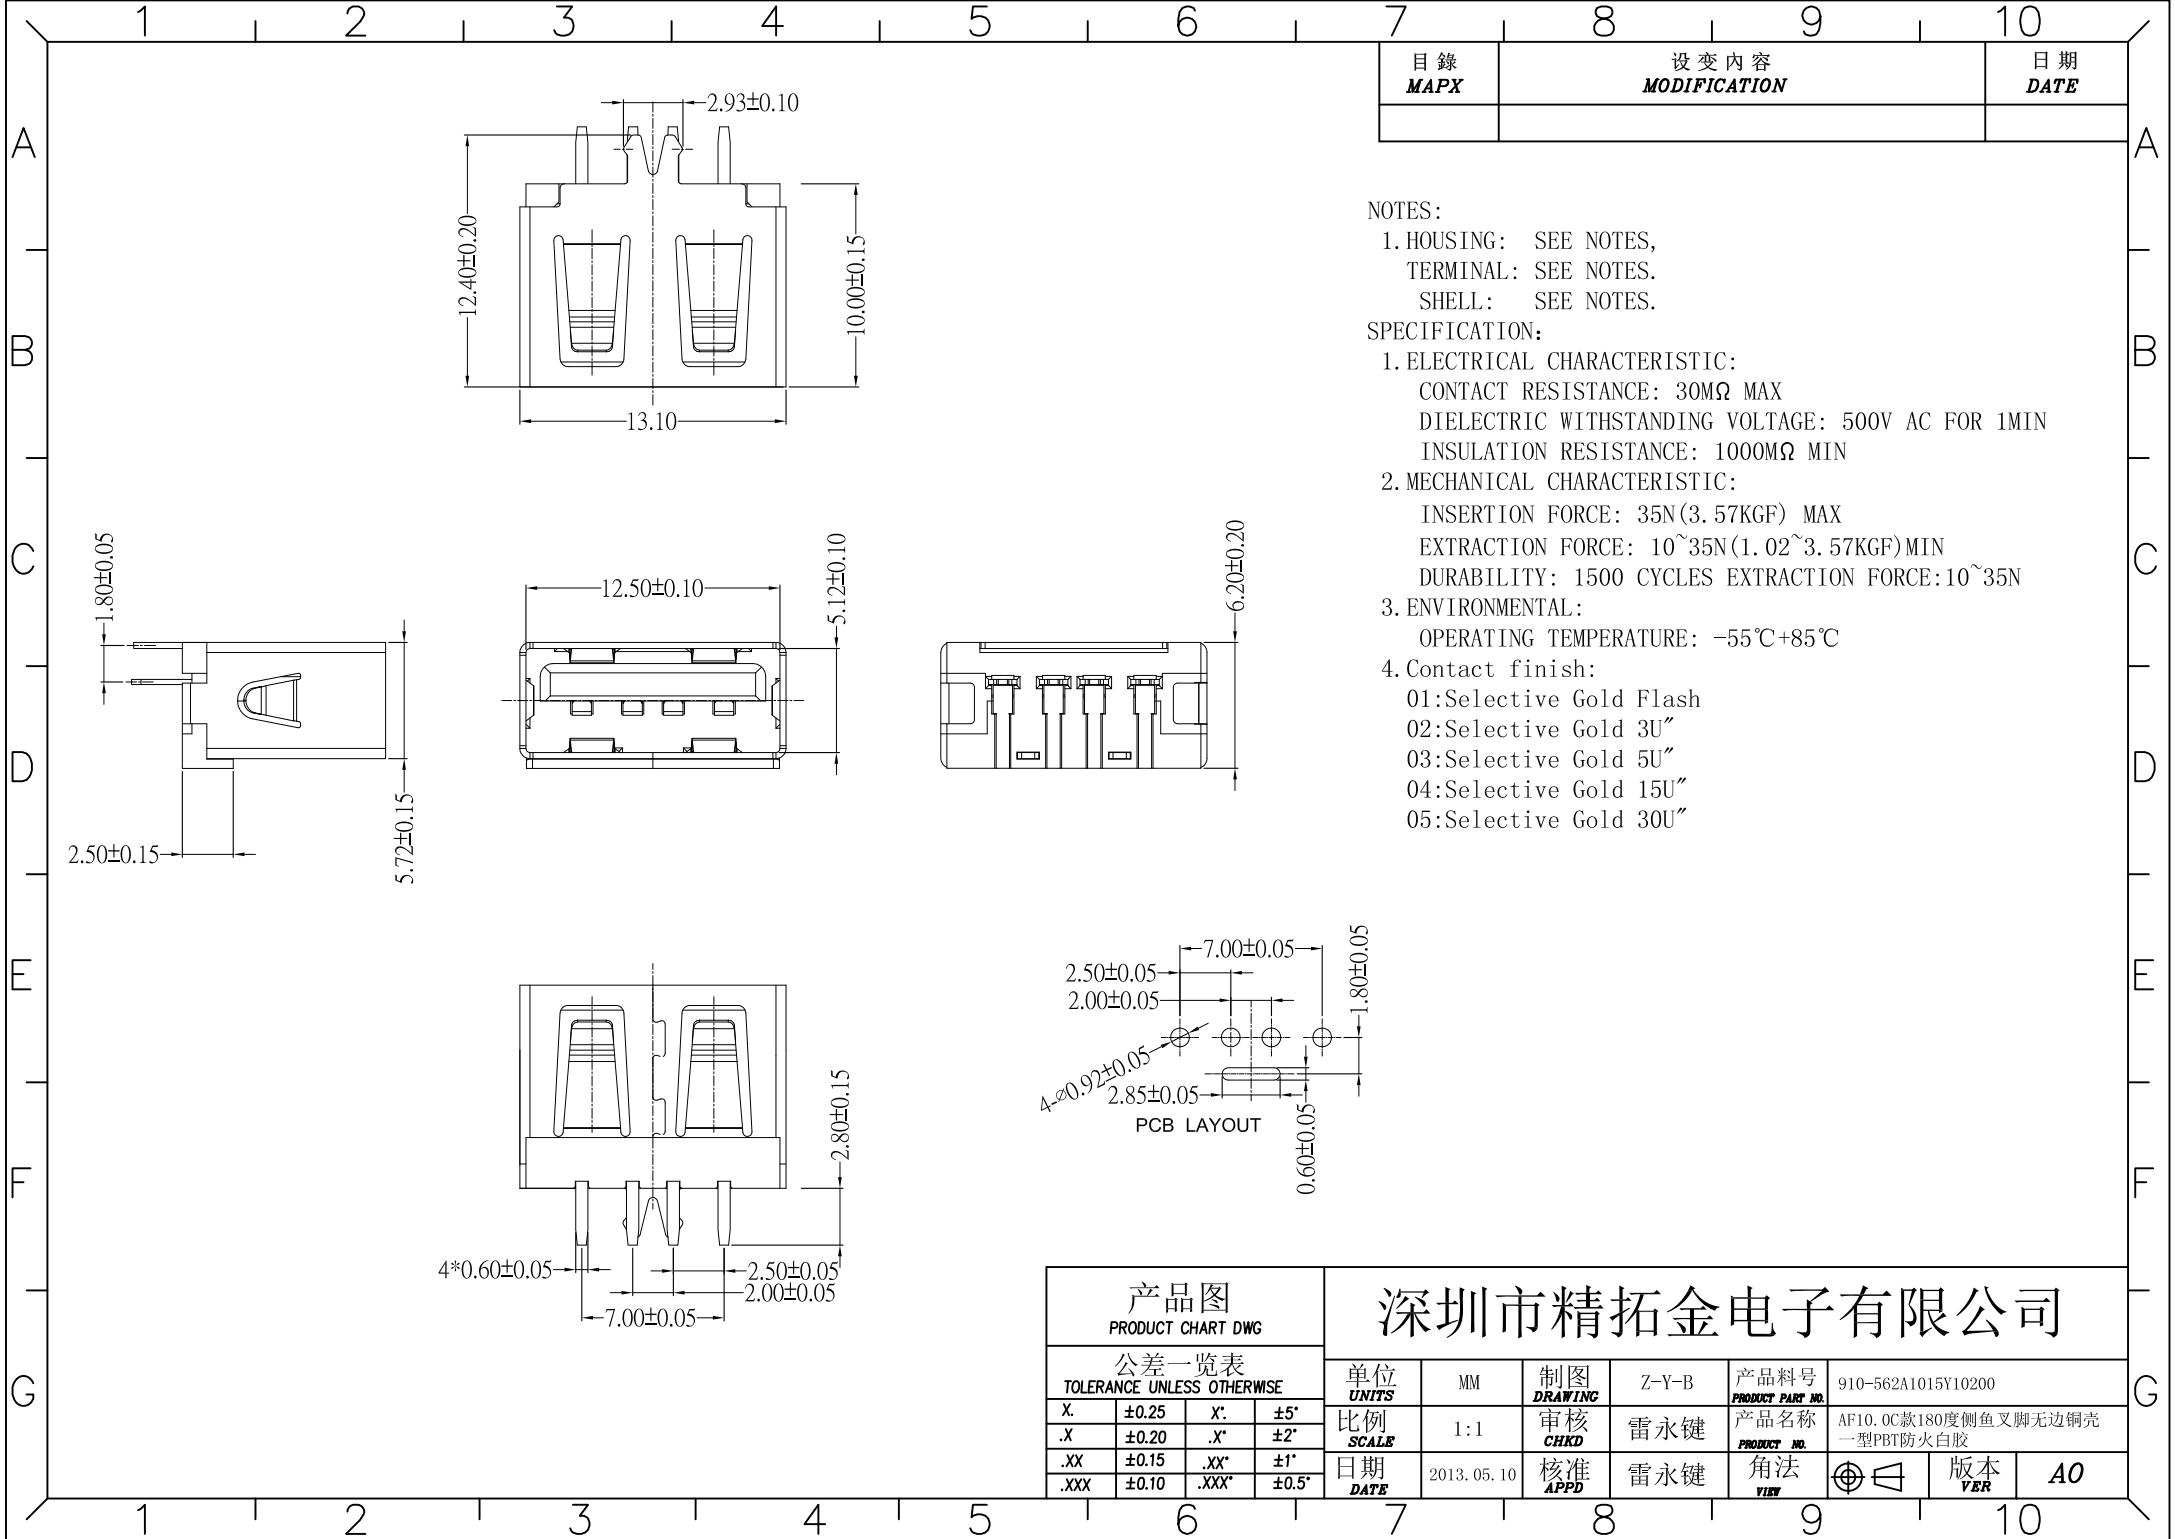

目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE

- NOTES:
- HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.
- SPECIFICATION:
- ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
 - MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
 - ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
 - Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

产 品 图 PRODUCT CHART DWG		深 圳 市 精 拓 金 电 子 有 限 公 司					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	910-562A1015Y10200
X.	±0.25	X'.	±5'	比例 SCALE	审核 CHKD	产品名称 PRODUCT NO.	AF10.0C款180度侧鱼叉脚无边铜壳 一型PBT防火白胶
.X	±0.20	.X'	±2'				
.XX	±0.15	.XX'	±1'	日期 DATE	核准 APPD	角法 VIEW	版本 VER
.XXX	±0.10	.XXX'	±0.5'				A0