
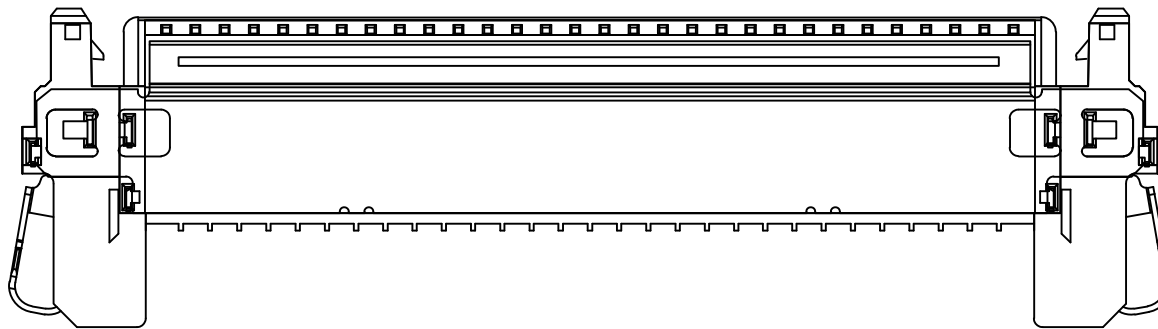


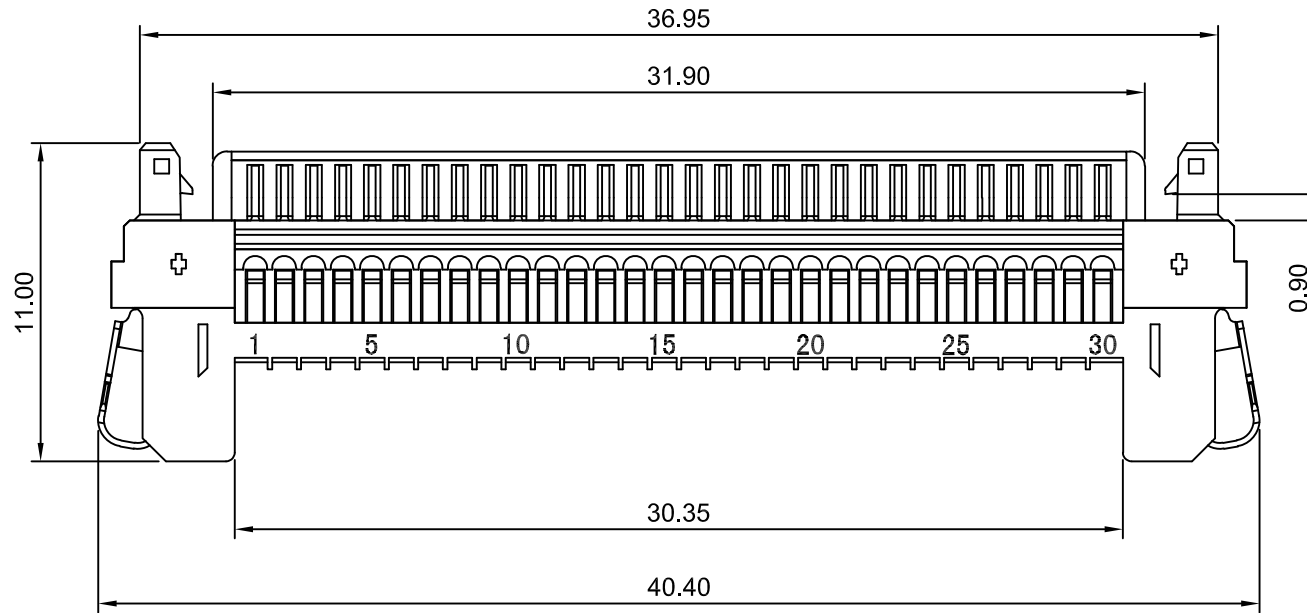

SPECIFICATIONS:

Current rating: 1A AC,DC

Voltage rating: 200V AC,DC

Temperature range: -40°C ~ +105°C

Contact resistance: 40MΩ Max.

Insulation resistance: 100MΩ Min.

Withstanding voltage: 500V AC/minute

Material: Housing: Nylon 66,UL94V-0(Ivory)

Shell: Phosphor Bronze/Nickel-plated

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	1.00mm PITCH CONNECTOR LOCK TYPE	
DRAWN	CHK'D	APPR	DRAWING NO.	
Chengbiao Ye	Djankui Wan	Jack Yin	A1001H-30PL	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A3	

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2023.07.18
A2	CHANGE THE DRAWING	2023.06.08
A1	CHANGE THE DRAWING	2017.10.13
A0	NEW RELEASE	2012.03.09