

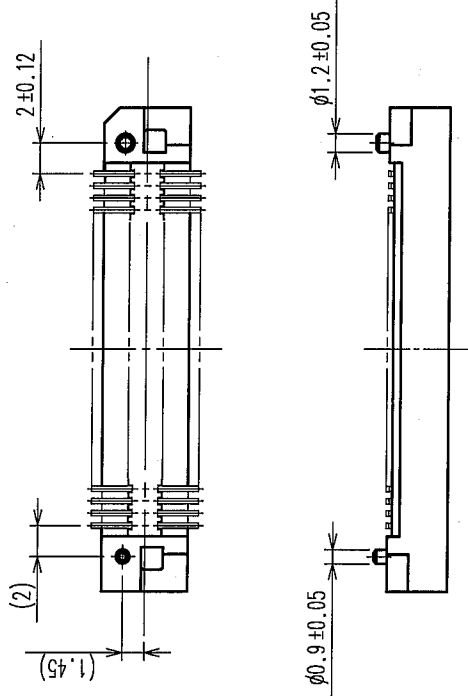



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

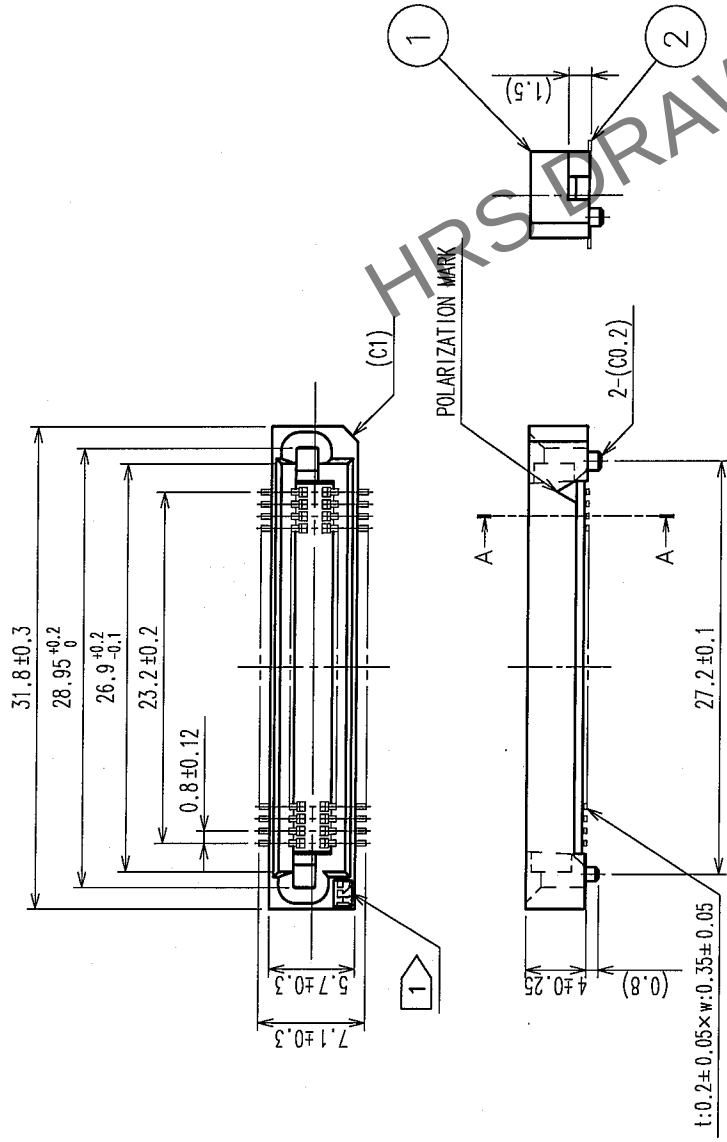

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

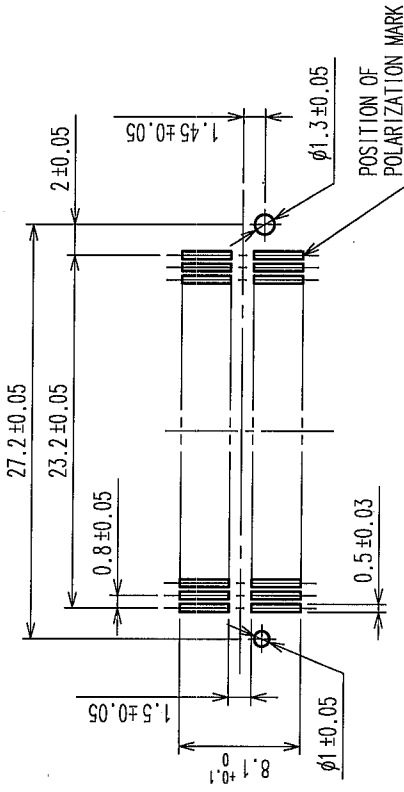

A-A(10:1)

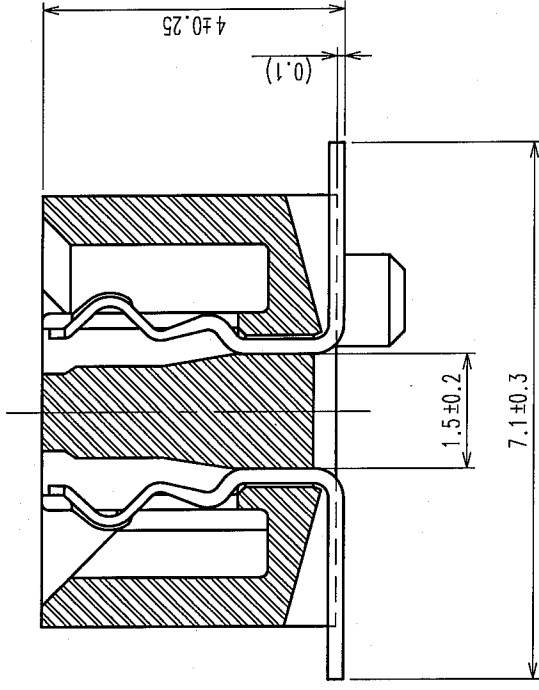

- NOTE
- 1 HR5 MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
 - 4 SEE NEXT PAGE FOR DETAILS.
 - 5 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
 - 6 SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
 - 7 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 8 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 2μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)					

DRAWING NO.	EDC3-084981-23	PART NO.	FX6-60S-0.8SV(93)
SCALE	2 : 1		
UNITS	mm		

DESIGNED	K. NAKAMURA	CHECKED	X. Ogami	APPROVED	H. Kawa	RELEASED	
DATE	06.01.24	DATE	06.01.24	DATE	06.01.25	DATE	

HR5

HIROSE ELECTRIC CO., LTD

CODE NO. CL576-0105-9-93

1/2

