



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
DF	A5	G		REVISED PER ECO-15-011840	17NOV15	RS CT

D

C

B

A

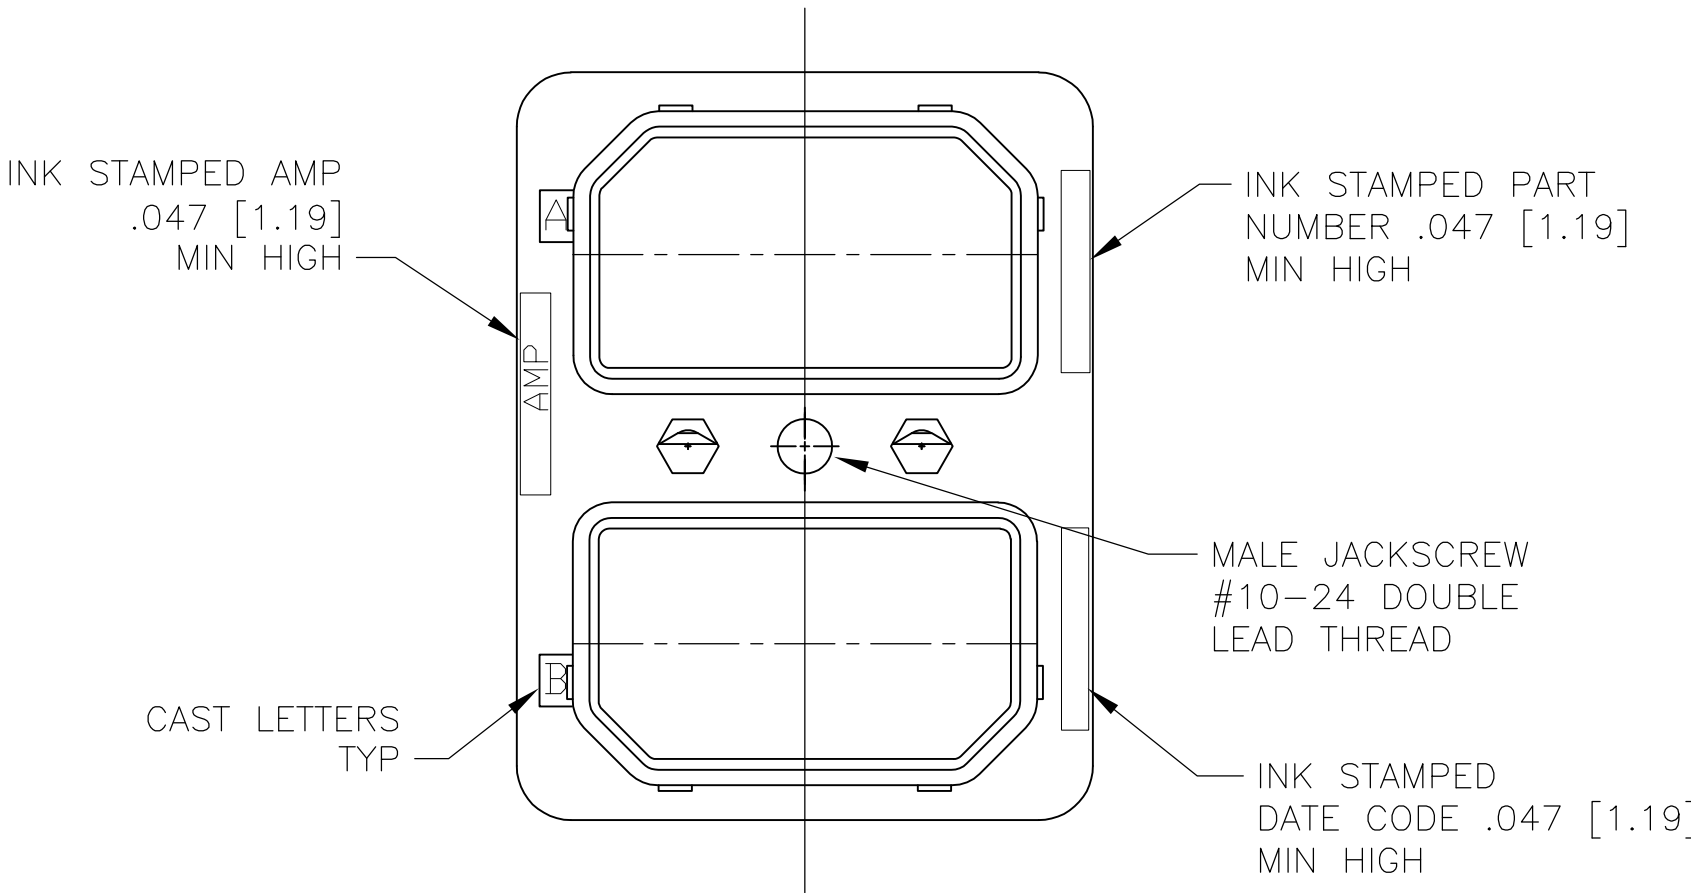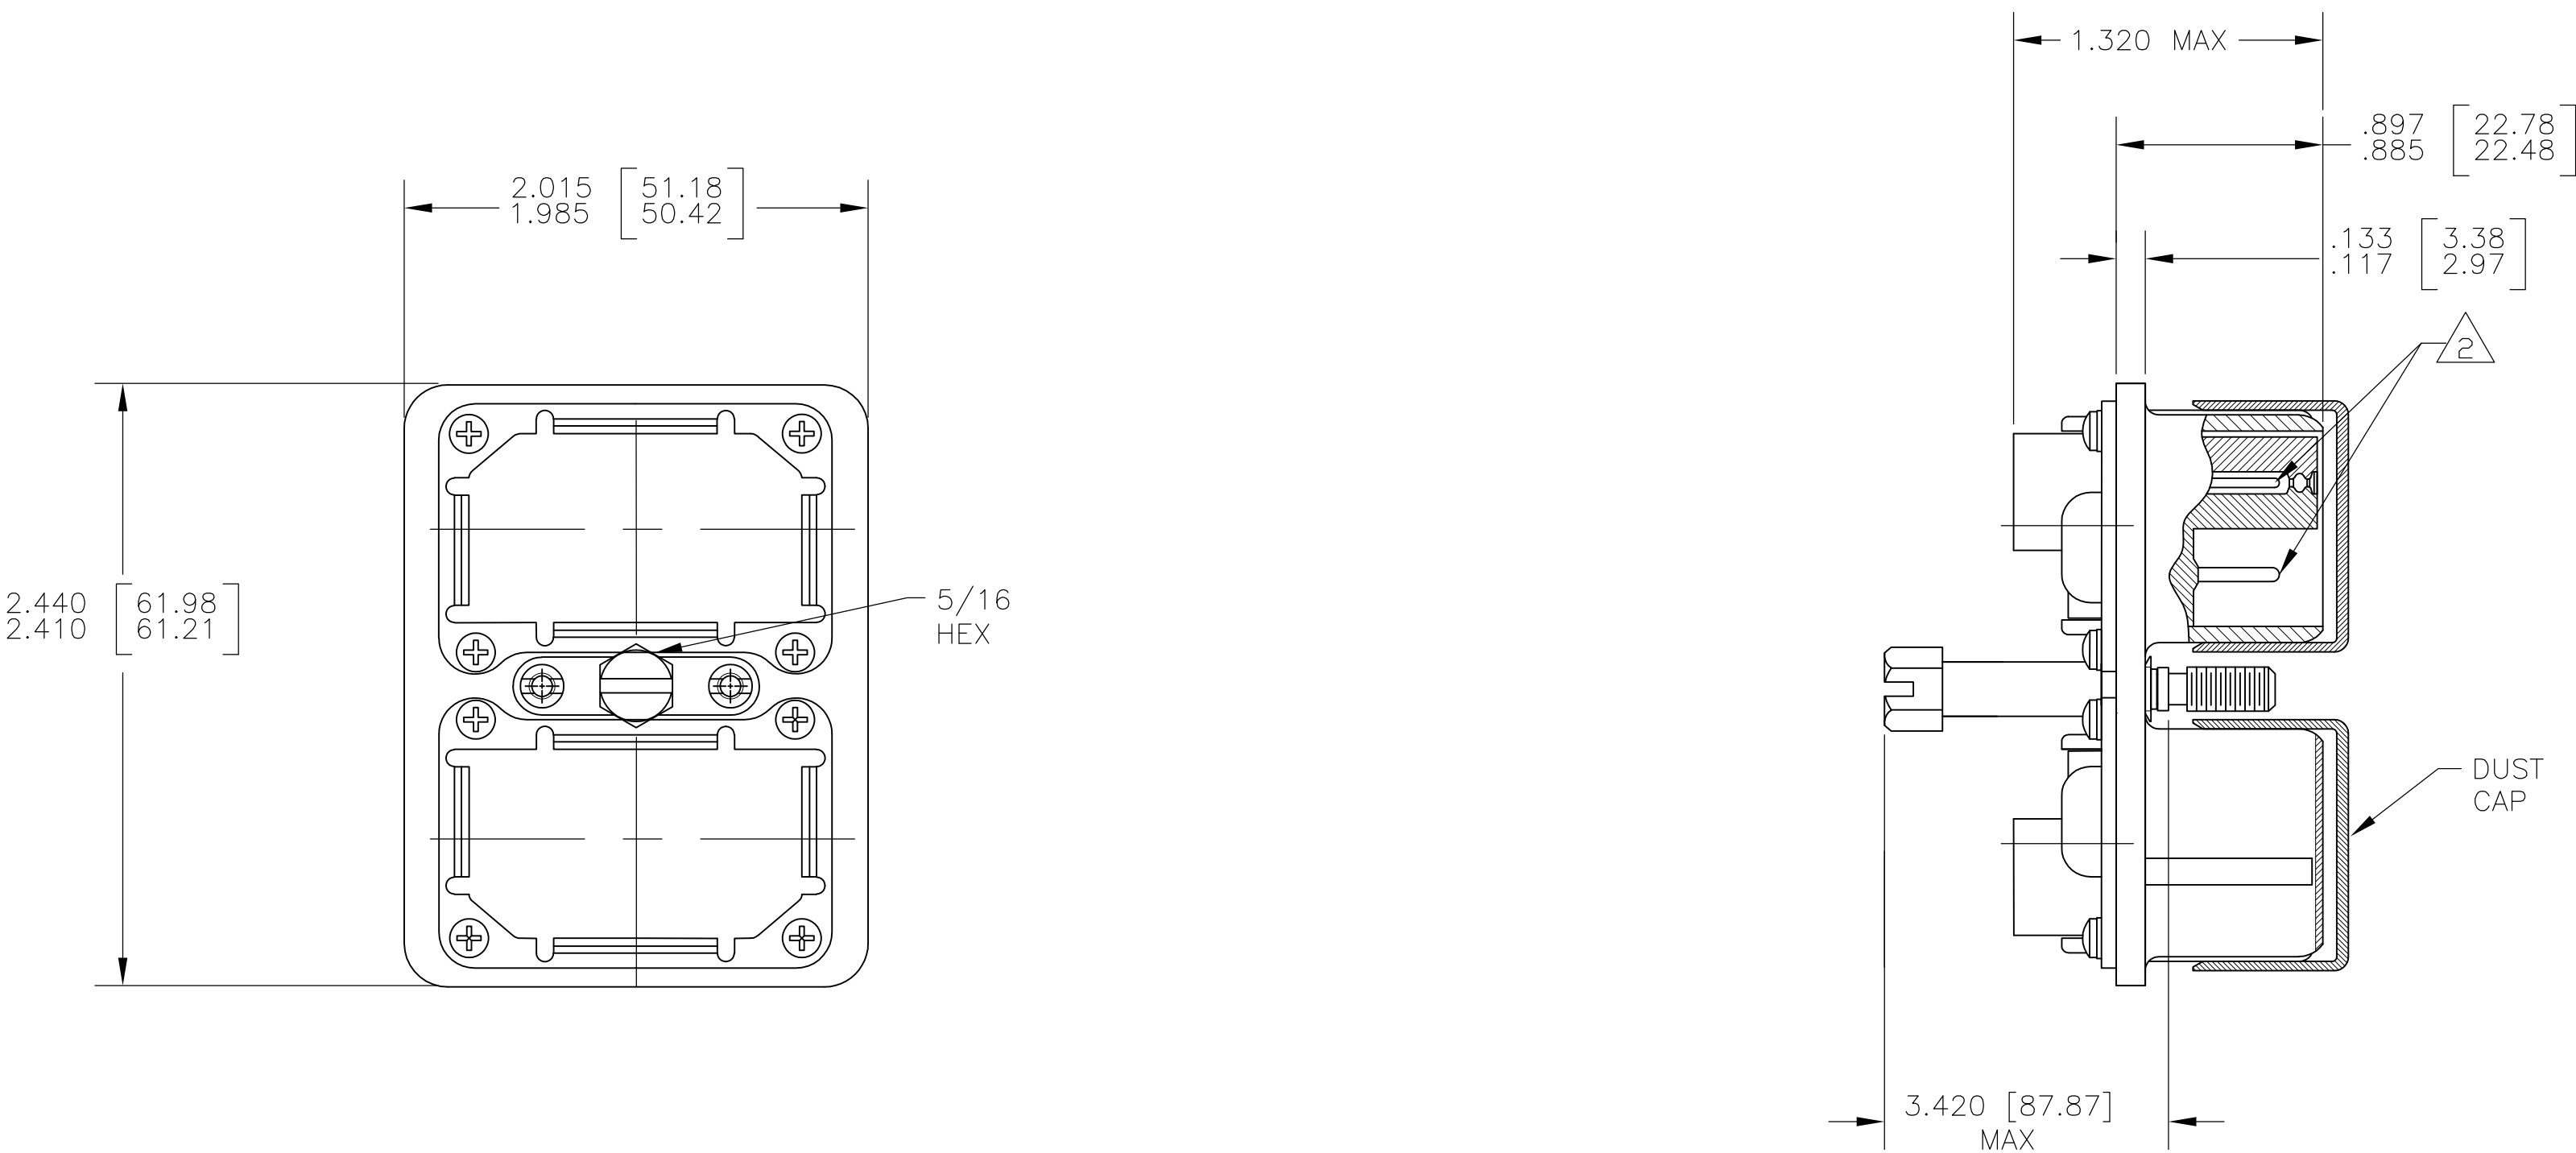

- 1 MATERIAL & FINISH
SHELL: DIE CAST ALUM. ALLOY PER FED SPEC QQ-A-591
FINISH: CAD. PLATED PER QQ-P-416, TYPE I, CLASS 2
YELLOW CHROMATE CONVERSION.
INSULATOR, HARD: EPOXY PER MIL-M-24325.
INSULATOR, SOFT: FLUOROSILICONE RUBBER, COLOR: BLUE.
GROMMET PROTECTOR: ALUM. ALLOY, FINISH: BLUE EPOXY.
SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATE
MALE JACKSCREW: STAINLESS STEEL
POLARIZING POSTS AND NUTS: STAINLESS STEEL
DUST CAP: CLEAR VINYL


- 2 CONTACTS SHOWN IN POSITION FOR ILLUSTRATION ONLY, ARE INCLUDED IN A CONTAINER WITHIN CONNECTOR PACKAGE FOR SHIPMENT.

3. CONNECTOR MEETS AMP PRODUCT SPEC 108-10,019.

4. ALL METRIC DIMENSIONS ARE SHOWN IN PARENTHESIS.

5. CONTACTS NOT INCLUDED AND MUST BE ORDERED SEPARATELY (-1 ASSY)

- 6 SAME AS -1 EXCEPT: CONTACTS , TOOLS AND SEALING PLUGS INCLUDED.

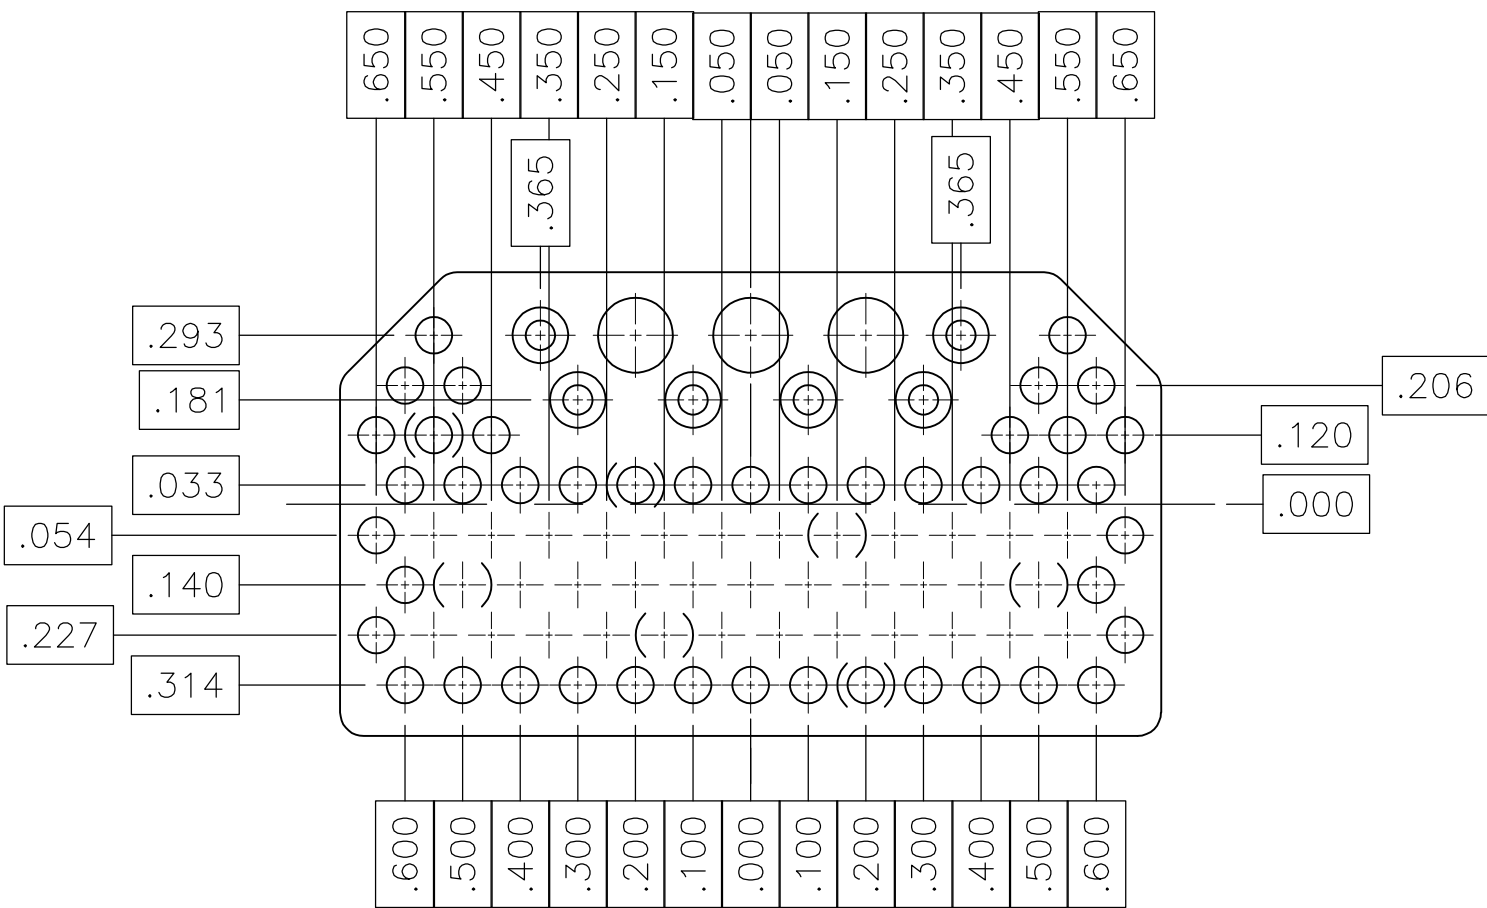

- INDICATES SIZE 22 CAVITIES (79 PLACES)
⊙ INDICATES SIZE 20 CAVITIES (6 PLACES)
○ INDICATES SIZE 16 CAVITIES (3 PLACES)

PART NO.	ARRANGEMENTS	
	MODULE A	MODULE B
211027-2	88S	88S
211027-1	88S	88S

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TERESA HECK CHK 4-27-82	TE Connectivity	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD LAWYER PRODUCT SPEC 4-27-82	NAME	
	0. PLC ± - 1. PLC ± - 2. PLC ± - 3. PLC ± - 4. PLC ± - ANGLES ± -	APPLICATION SPEC	PLUG CONNECTOR INSTALLATION (WITH CENTER MALE JACKSCREW)	
MATERIAL	FINISH	WEIGHT	SIZE A1	CAGE CODE 00779
CUSTOMER DRAWING		SCALE 1:1	DRAWING NO 211027	RESTRICTED TO -
		SHEET 1 OF 1	REV G	