



P.C.B. PLYOUT

一、 MATERIAL:

- 1. Insulator: PBT+30%Glass Fiber (UL94V-0), color: black
- 2. Contact: Brass
- 3. Contact Plated: Gold Flash over Tin
- 4. Shell: Steel, Nickel Plated;
- 5. Shell: Salt Spray: 12hrs

二、 SPECIFICATION:

- 1. Current Rating: 1 AMP
 - 2. Insulation Resistance: 5000MΩ MIN. At 500VDC
 - 3. Dielectric Strength: 500V for One minute
 - 4. Operation Temperature: -30° C~+85° C.
- 三、 Dim.s marked numbers should be checked by QC

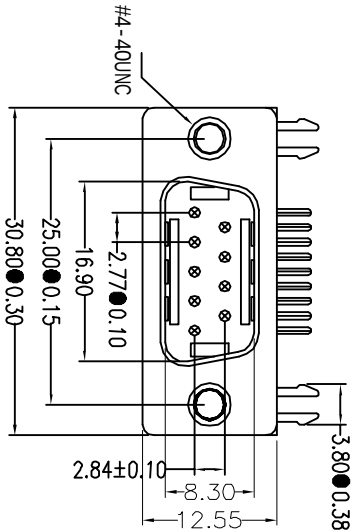

深圳市万骏达电子有限公司				图号 (DWG NO)		单位 (UNIT): MM
品名 (ITEM NO)		DR-9公叉锁	版本 (REV)			比例 (SCALE) 1:1
料号 (PART NO)		DSUB-DR-9M-CS	日期 (DATE)			未注公差
模号 (MODEL NO)			设计 (DESIGN)			TOLERANCE UNINSPECTED
			审核 (CHECKED)			X.X ±0.30
			核准 (APPROVED)			X.XX ±0.20
						X.XX ±0.10
						X.X ±0.05