

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	01APR2015	DW	CW
	B	ECR-15-014907	14OCT2015	DL	CW

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40-+125^{\circ}C$
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X20XX000)


注释:

- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40-+125^{\circ}C$
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

M4 THREAD
RECOMMENDED
TIGHTENING TORQUE
1.2Nm

4X M3 THREAD, RECOMMENDED
TIGHTENING TORQUE 0.5Nm


PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

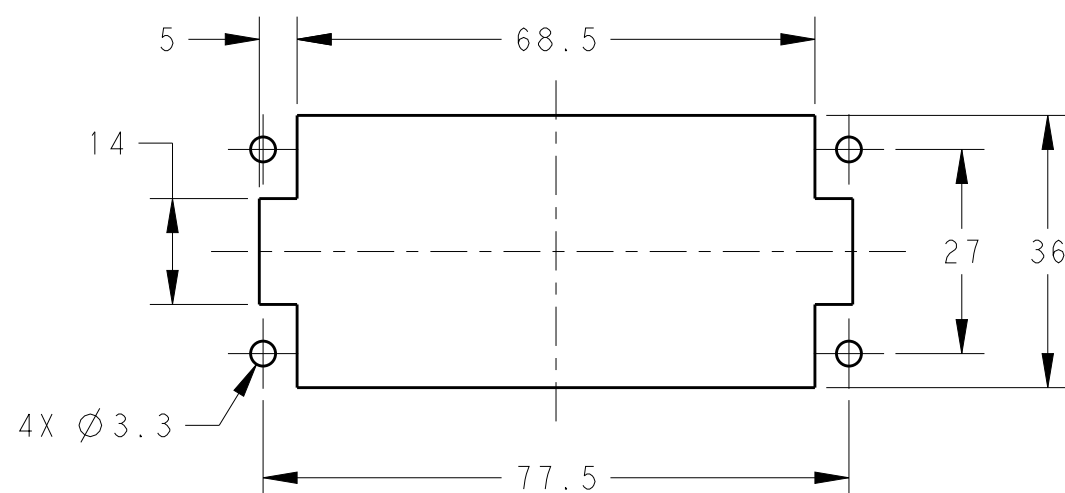

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±0.1
1 PLC	±0.15
2 PLC	±0.2
3 PLC	±0.25
4 PLC	±0.3
ANGLES	±0.5

MATERIAL

-

FINISH

-

DWN 01APR2015

David Wang

CHK 01APR2015

Chris Wang

APVD 01APR2015

Xiang Xu

PRODUCT SPEC

108-106137

APPLICATION SPEC

114-106137

WEIGHT

-

Customer Drawing

HEE-032-F
WITHOUT LOGO

DESCRIPTION

T2059322201-000

PART NUMBER

TE Connectivity

NAME

HEE-032-F
WITHOUT LOGO

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

T2059322201000

-

SCALE

1:1

SHEET

1

OF

1

REV

B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T2059322201-000](#)