


## VTM7 Series, Repeat Cycle, Timing Module



### Product Facts

- Repeat cycle timing mode
- Independently adjustable On and Off times
- Reliable solid state timing circuitry
- Excellent transient protection
- Compact design
- Flame retardant, solvent resistant housing
- File E60363, File LR33434



### Timing Specifications

**Timing Mode** — Repeat Cycle

**Timing Ranges** — 0.5 to 10 / 3 to 60 sec.; 3 to 60 min.

**Timing Adjustment** — External resistor or potentiometer. An external resistance of 1 megohm is required to obtain the maximum time for all ranges. To determine the actual resistance needed to obtain the required time delay, use the following formula:

$$R_T = \frac{(T_{REQ} - T_{MIN})}{T_{MAX} - T_{MIN}} \times 1,000,000 \text{ ohms}$$

**Accuracy** —

Repeat Accuracy —  $\pm 1\%$   
Overall Accuracy —  $\pm 2\%$  at  $R = 1 \text{ megohm}$

**Reset Time** — 500 ms

### Output Switch Data

**Arrangement** — Solid state 1 Form A (SPST-NO)

**Rating** — 1A, inductive, at nominal operating voltage.

**Expected Electrical Life** — 10,000,000 operations at rated load.

**Initial Dielectric Strength** —  
Between Terminals and Mounting — 3,000VAC rms.  
Between Input and Output — 1,500VAC rms.

### Input Data @ 25°C

**Voltage ( $\pm 10\%$ )** — 12 VAC/VDC, 24VAC/VDC, 120 VAC/VDC.

**Power Requirement** — 4W with rated load

**Transient Protection** —

Non-repetitive transients of the following magnitudes will not cause spurious operation of affect function and accuracy.

Operating Voltage	<0.1 ms	<1 ms
12, 24 VAC/VDC	860V*	208V*
120 VAC/VDC	2,580V	2,150V*

\* Min. source impedance of 100 ohms.

**Current Drain** — Less than 5mA.

### Environmental Data

**Temperature Range** —

Storage —  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$


Operating —  $-40^\circ\text{C}$  to  $+65^\circ\text{C}$

### Mechanical Data


**Mounting** — Panel mount with one #8 screw.

**Termination** — 0.250 in (6.35) quick connect terminals.

**Weight** — 4 oz. (112g) approximately

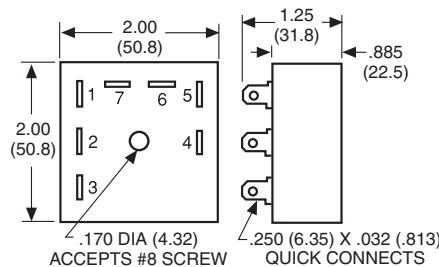

Outline Dimensions

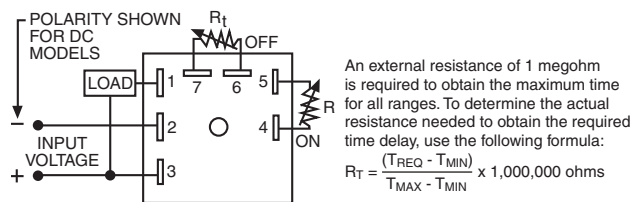

Wiring Diagram

### Ordering Information

**VTM7**

Series VTM7  
Repeat Cycle  
Timing Module

**A**

Input Voltage  
A = 120VAC/VDC  
E = 24VAC/VDC  
Q = 12VAC/VDC

**CD**

Time Range  
CD = 0.5 - 10 sec.  
DD = 3 - 60 sec.  
GD = 3 - 60 min.

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

**Authorized distributors are likely to stock the following:**

None at present.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[VTMA1ADA](#) [VTM7ACD](#)