

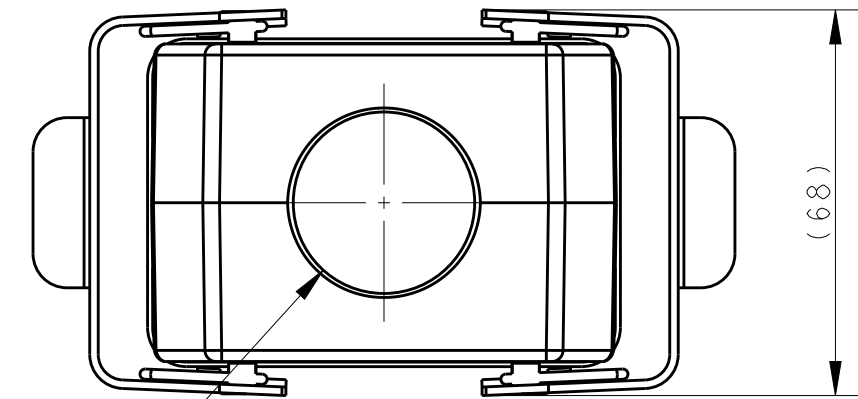
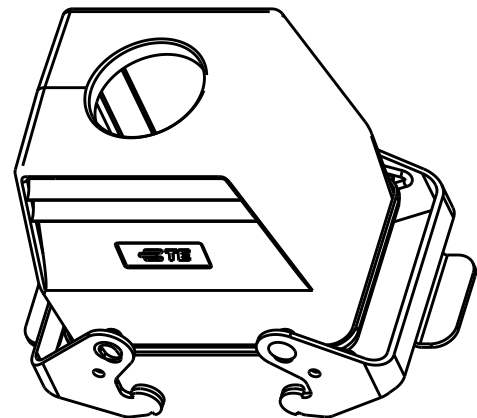


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	11MAY2015	DL	CW

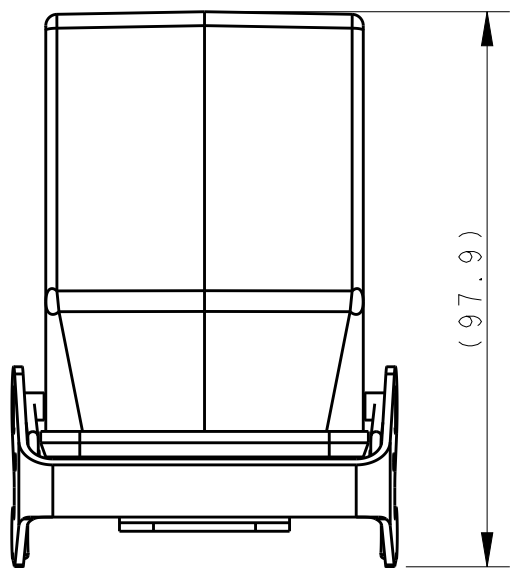

PG/M

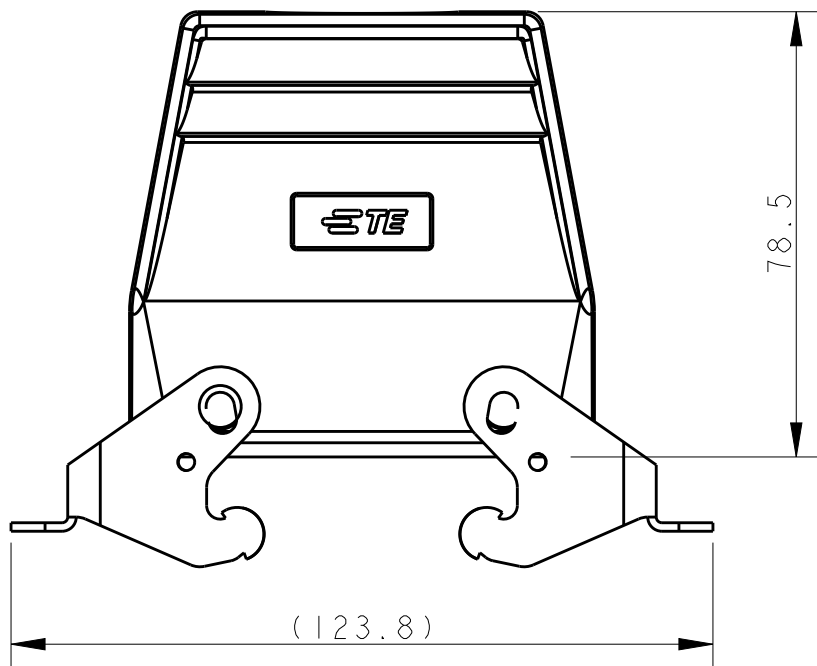



SCALE 1:2

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

T1739320129-000	H32A-TBF-PG29	PG29
T1739320132-000	H32A-TBF-M32	M32
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	PG/M

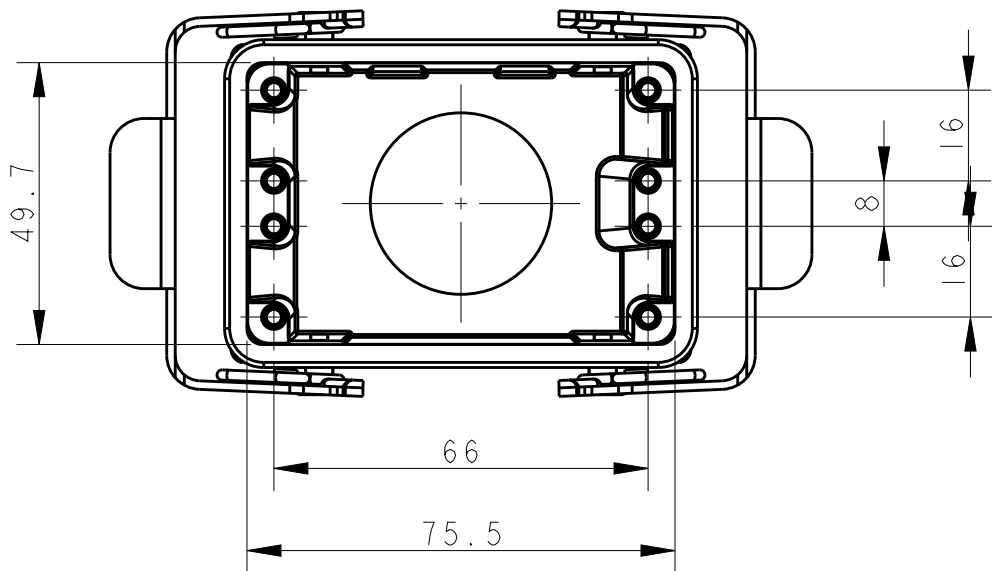

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 11MAY2015	 TE Connectivity		
DIMENSIONS:		CHK CHRIS WANG 11MAY2015			
mm		APVD XU XIANG 11MAY2015	NAME H32A-TBF-PG/M		
		PRODUCT SPEC 108-137010	SIZE A3 CAGE CODE - DRAWING NO C-T17393201XX000 RESTRICTED TO -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-137010			
MATERIAL -		WEIGHT -	SCALE 3:4 SHEET 1 OF 1 REV A		
FINISH -		CUSTOMER DRAWING			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T1739320129-000](#)