

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20







© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUL2015	DL	CW

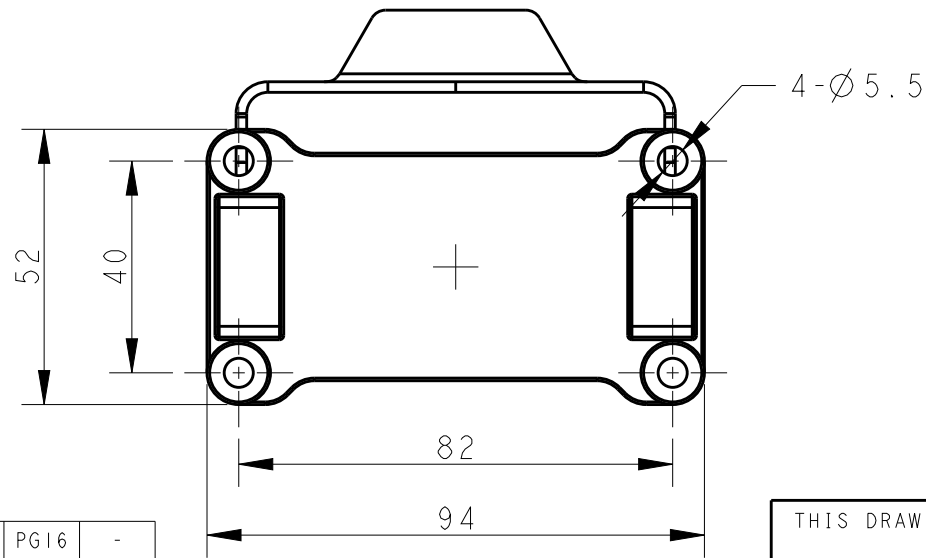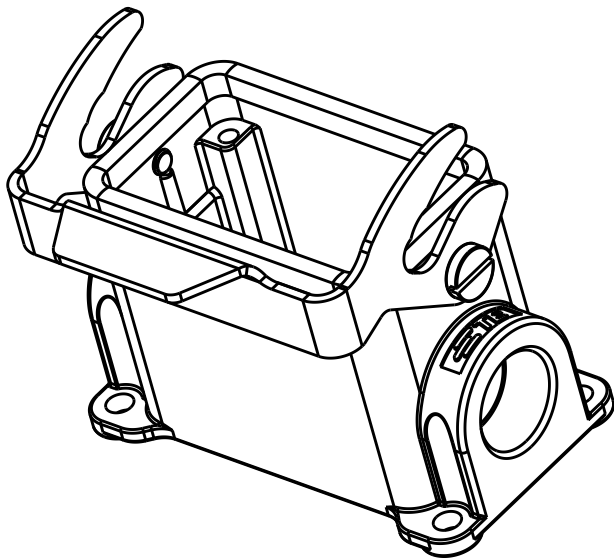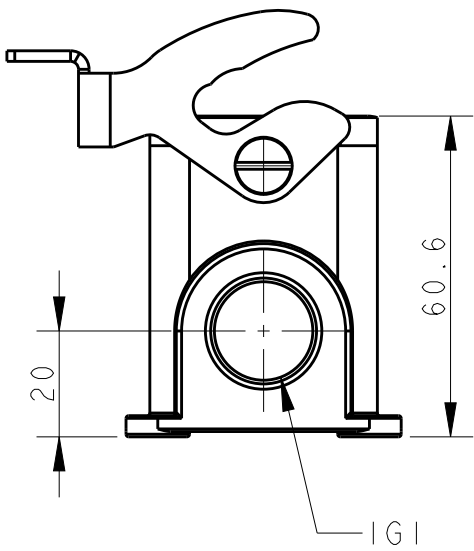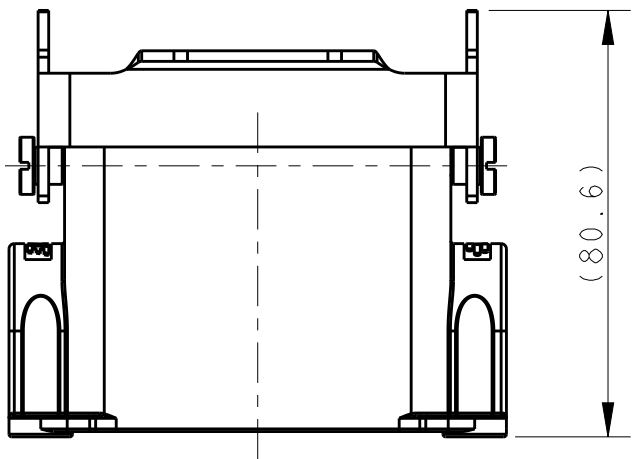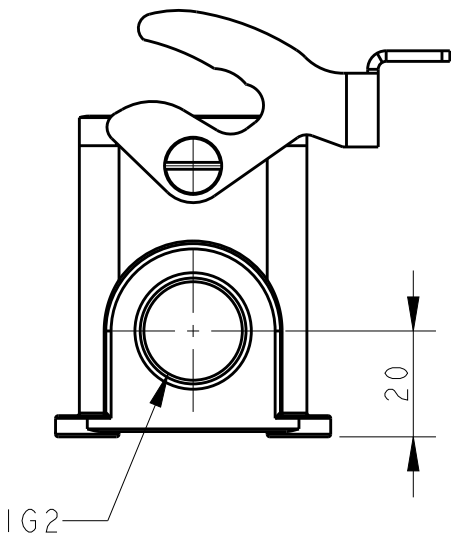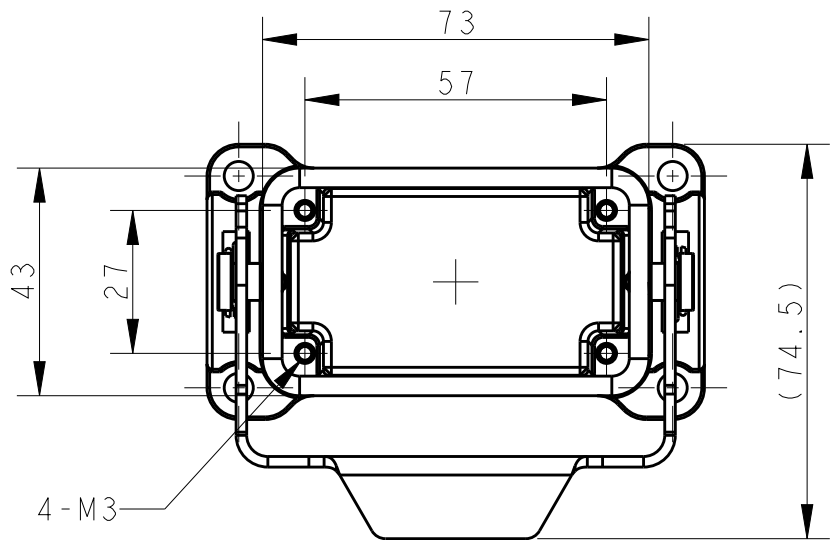

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI610103116-000	H10B-SGR-LB-PG16	PG16	-
TI610103120-000	H10B-SGR-LB-M20	M20	-
TI610103121-000	H10B-SGR-LB-PG21	PG21	-
TI610103125-000	H10B-SGR-LB-M25	M25	-
TI610103216-000	H10B-SGR-LB-2PG16	PG16	PG16
TI610103220-000	H10B-SGR-LB-2M20	M20	M20
TI610103221-000	H10B-SGR-LB-2PG21	PG21	PG21
TI610103225-000	H10B-SGR-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 08JUL2015		 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK CHRIS WANG 08JUL2015			
				APVD XU XIANG 08JUL2015			
				NAME H10B-SGR-LB-PG			
		0 PLC ±-		PRODUCT SPEC			
		1 PLC ±-		108-137013			
		2 PLC ±-		APPLICATION SPEC			
		3 PLC ±-		114-137013			
		4 PLC ±-		WEIGHT		SIZE	
		ANGLES ±-		-		CAGE CODE	
MATERIAL		FINISH		CUSTOMER DRAWING		DRAWING NO	
TBD		-				RESTRICTED TO	
-		-				-	
						SCALE	
						7:10	
						SHEET	
						1 OF 1	
						REV	
						A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T1610103225-000](#)