



TYPE 1

Single PG/M thread

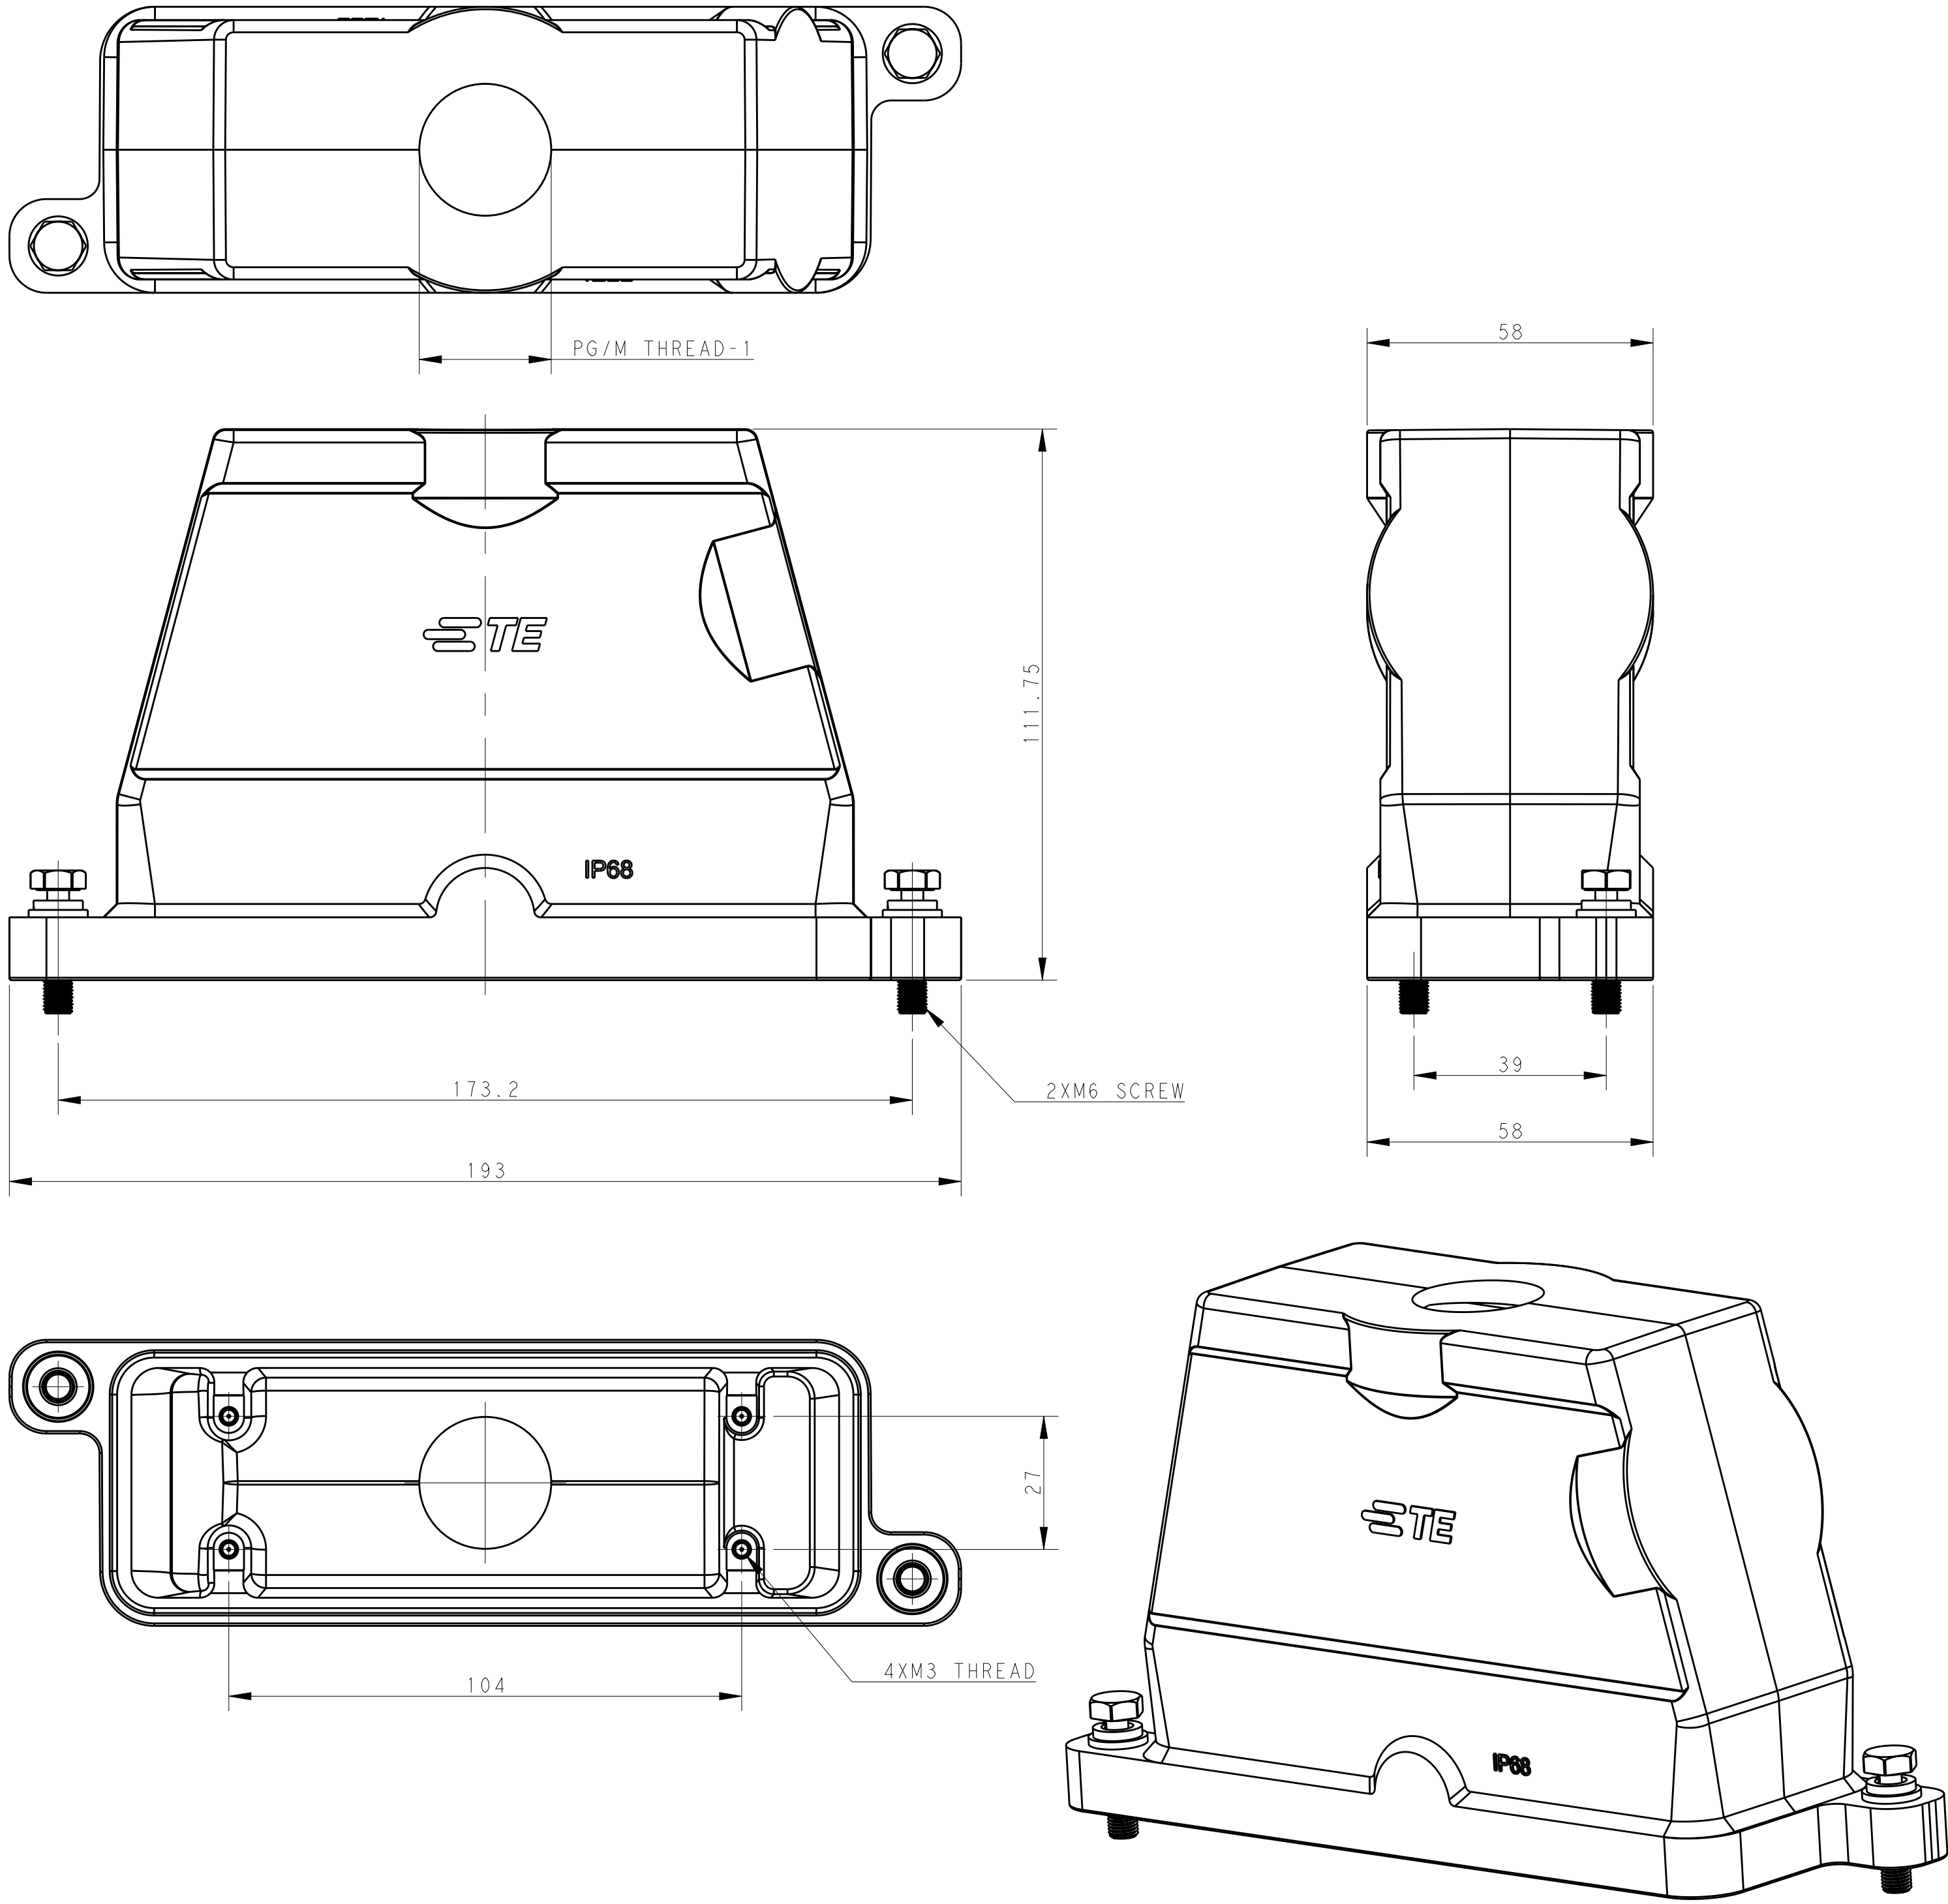

TYPE 2


Single PG/M thread & without Logo

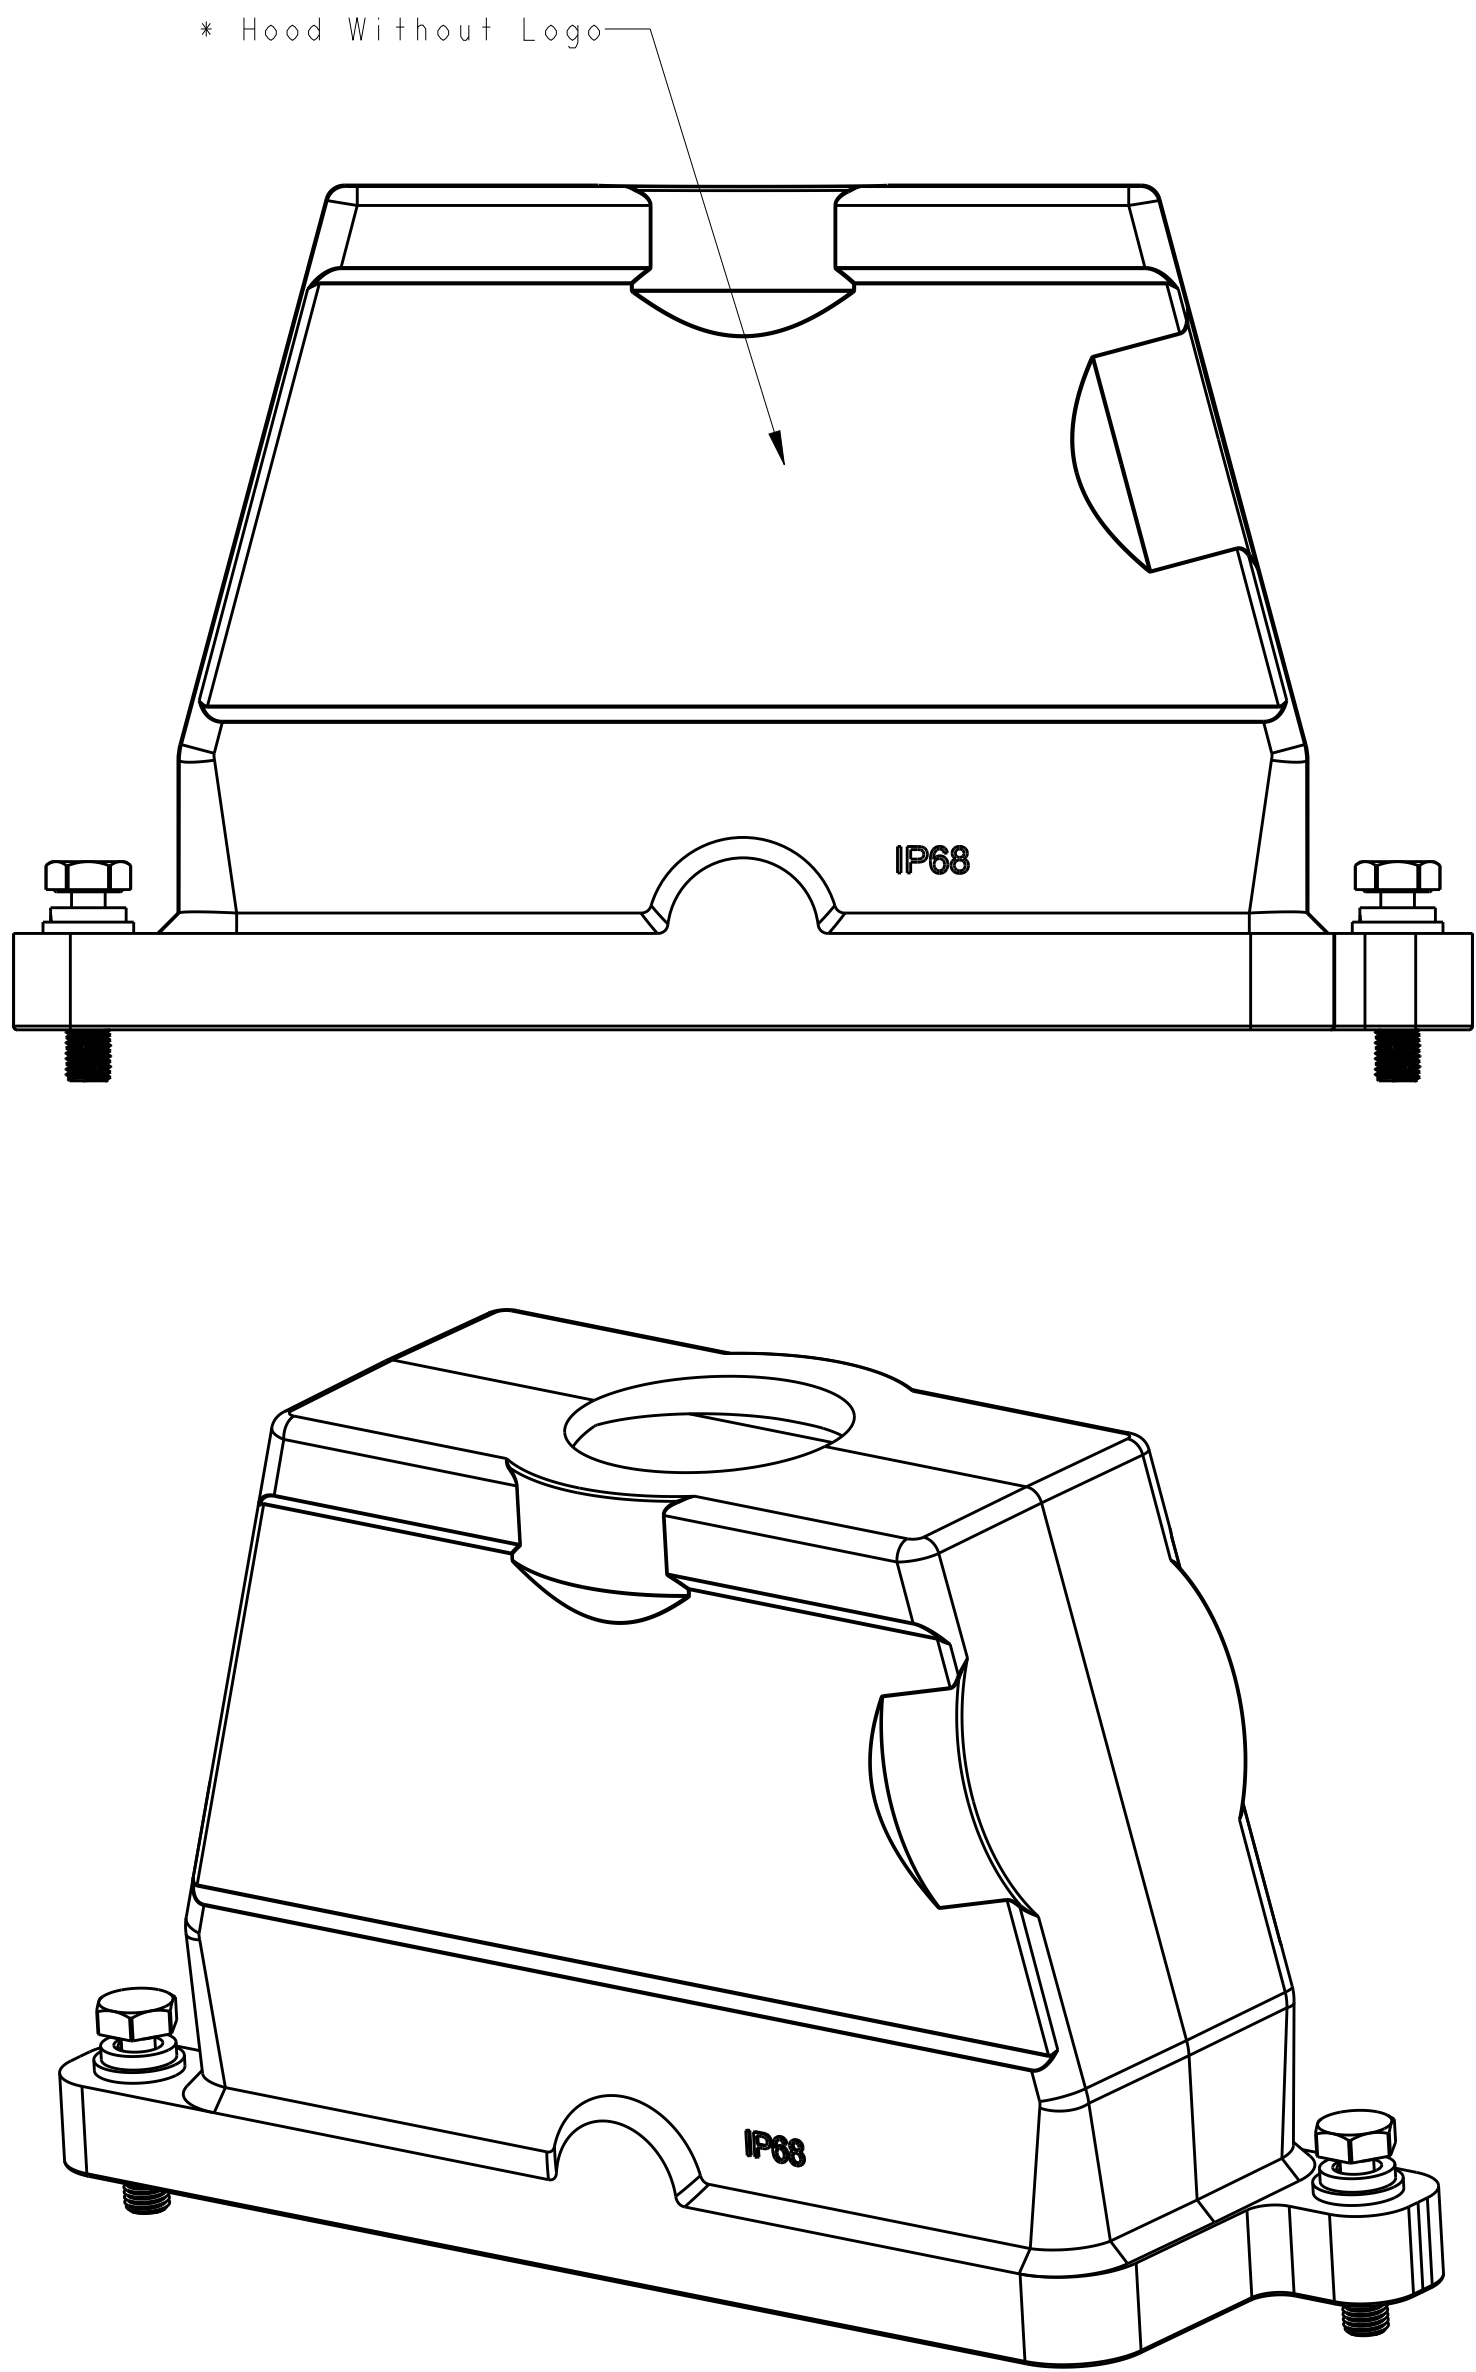

All dimension is same as TYPE 1,except those defined in this TYPE

TYPE 3


Two PG/M threads

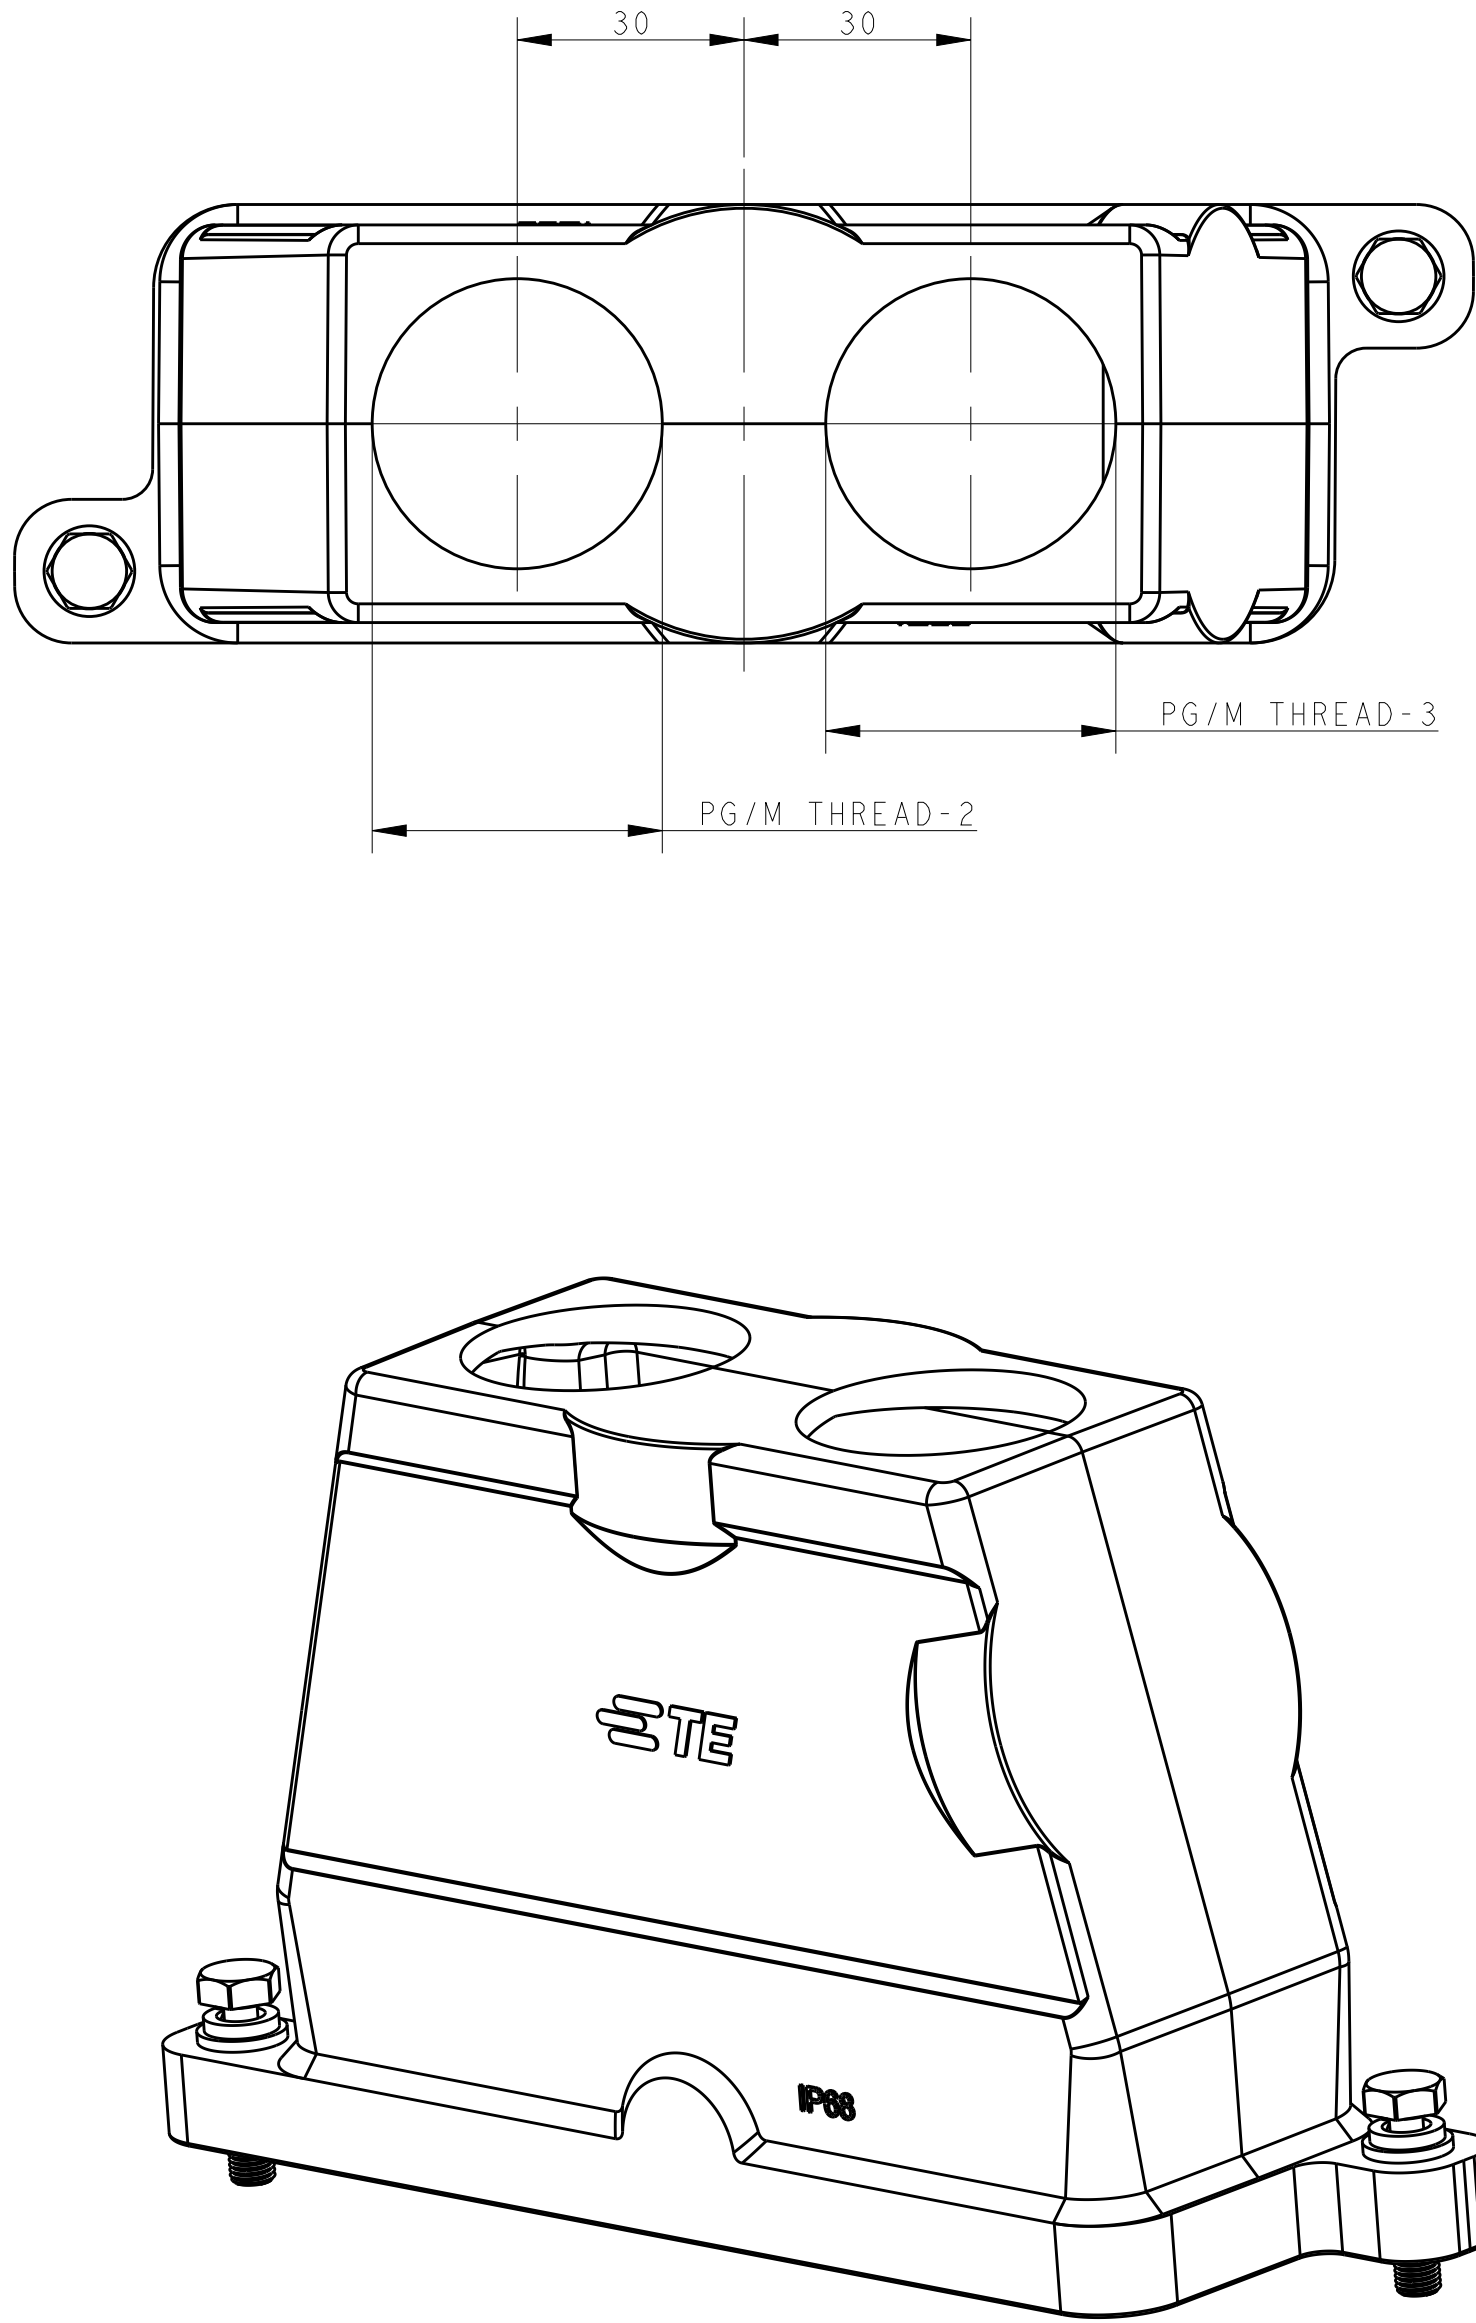

All dimension is same as TYPE 1,except those defined in this TYPE

TYPE 4


Two PG/M threads & without Logo

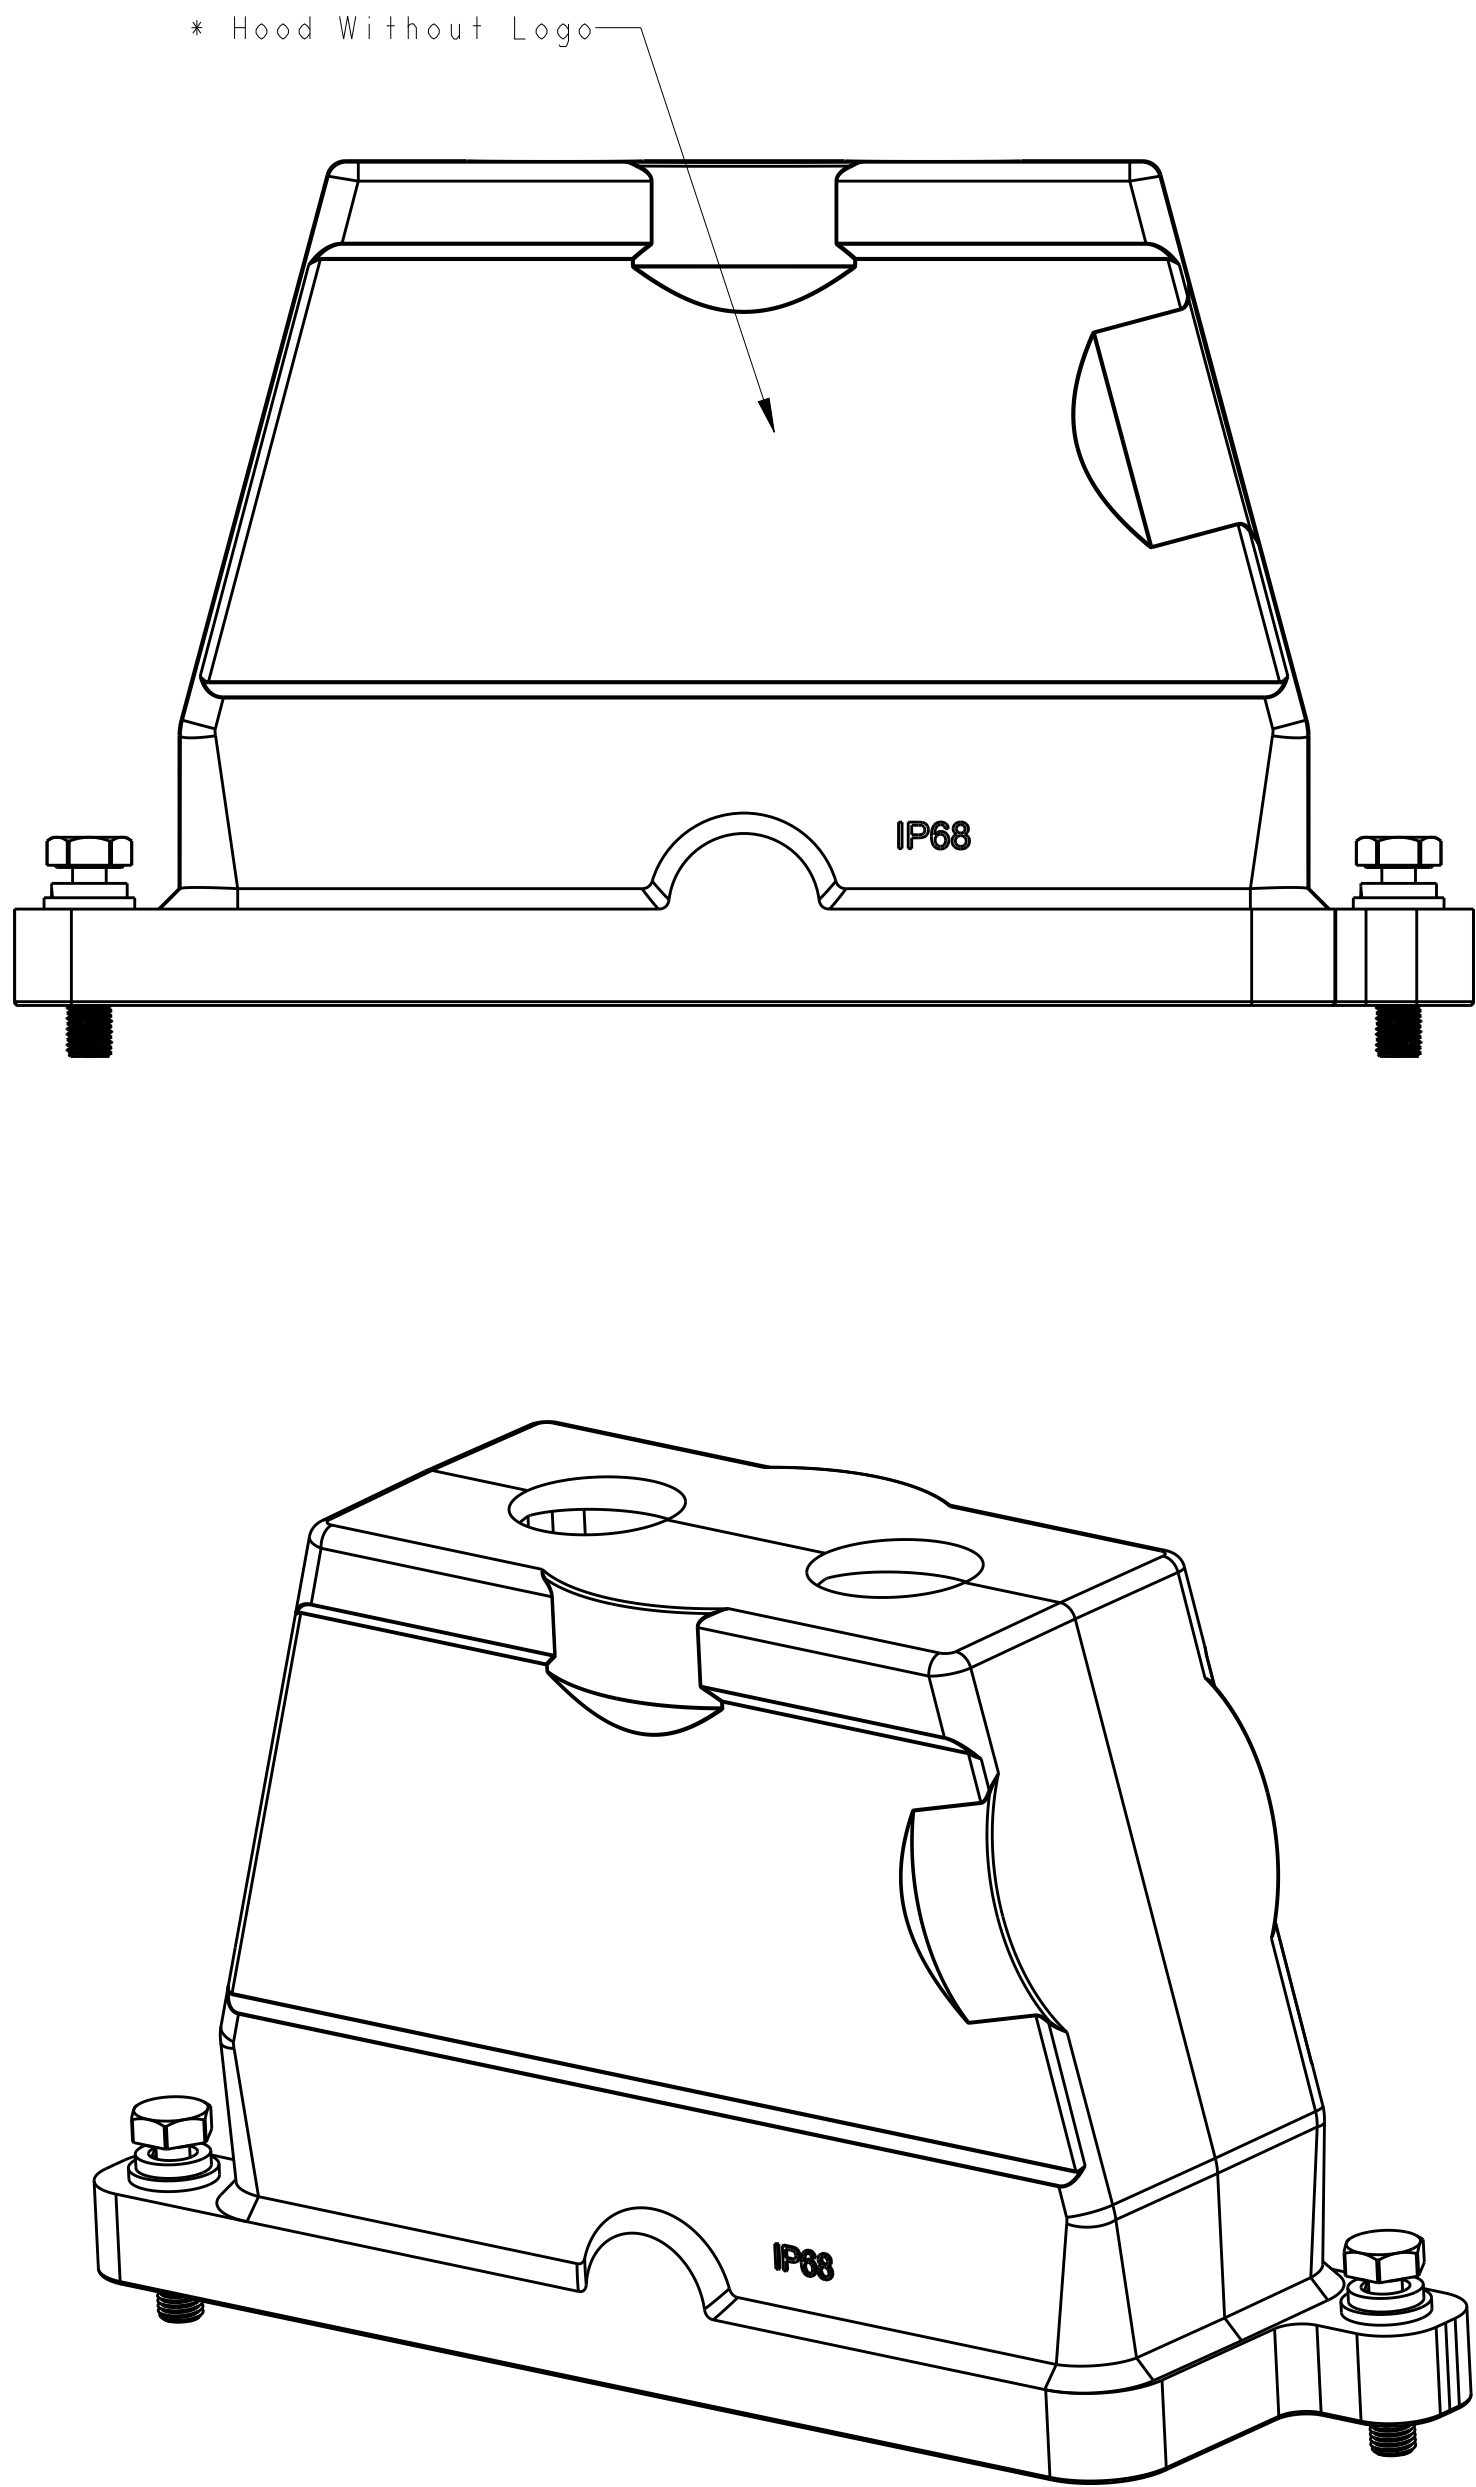

All dimension is same as TYPE 1,except those defined in this TYPE

TYPE 5


Three PG/M threads

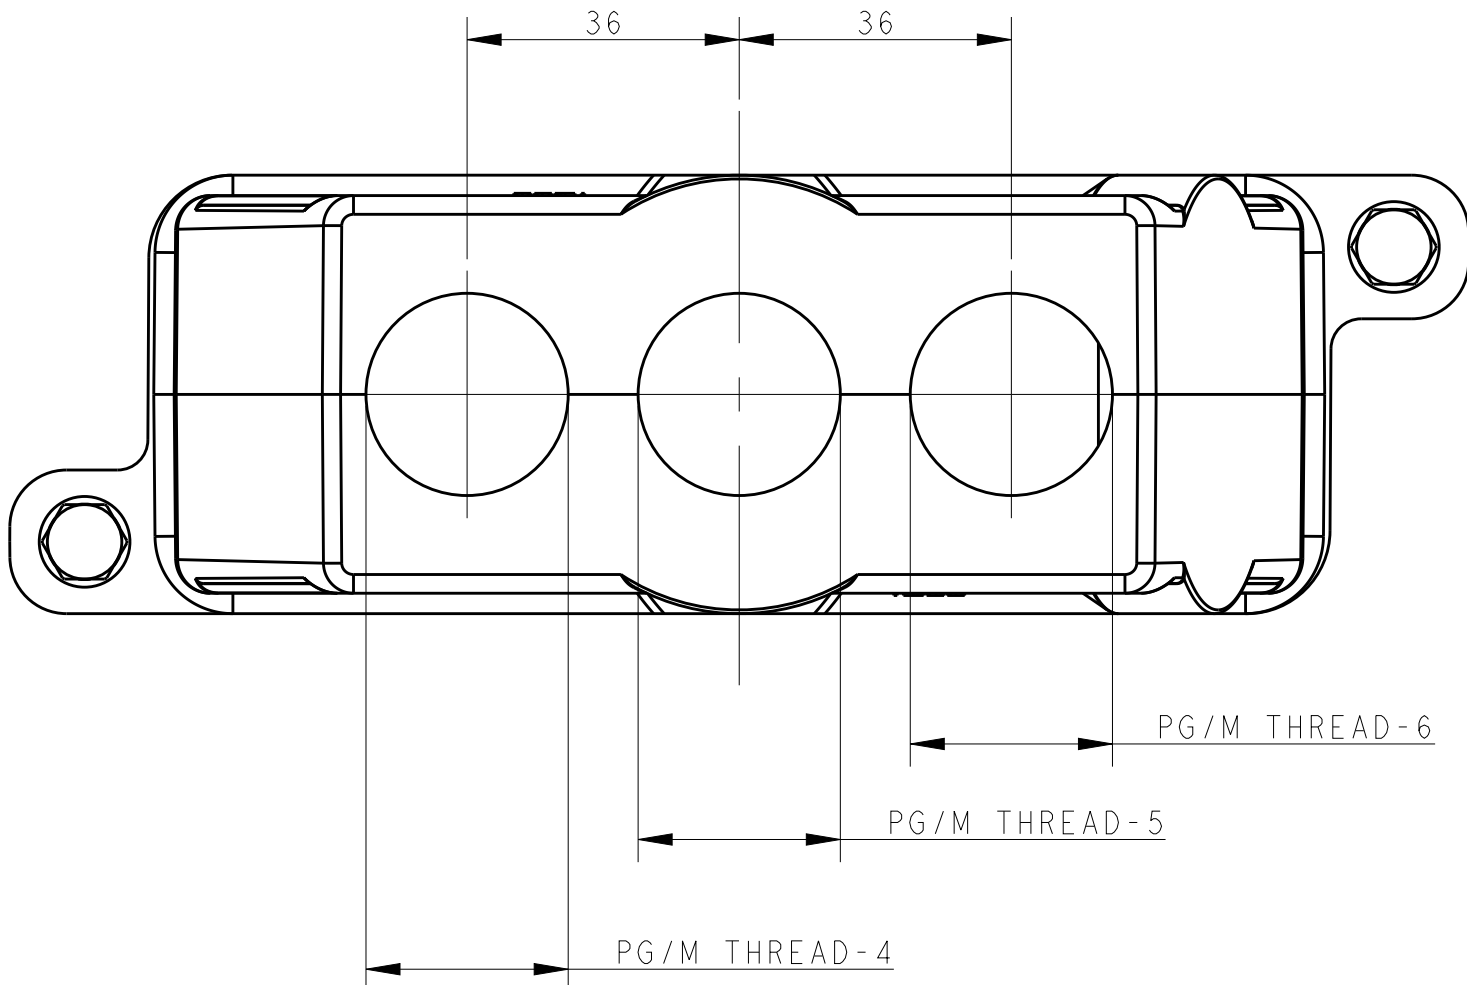

All dimension is same as TYPE 1,except those defined in this TYPE

TYPE 6

Three PG/M threads

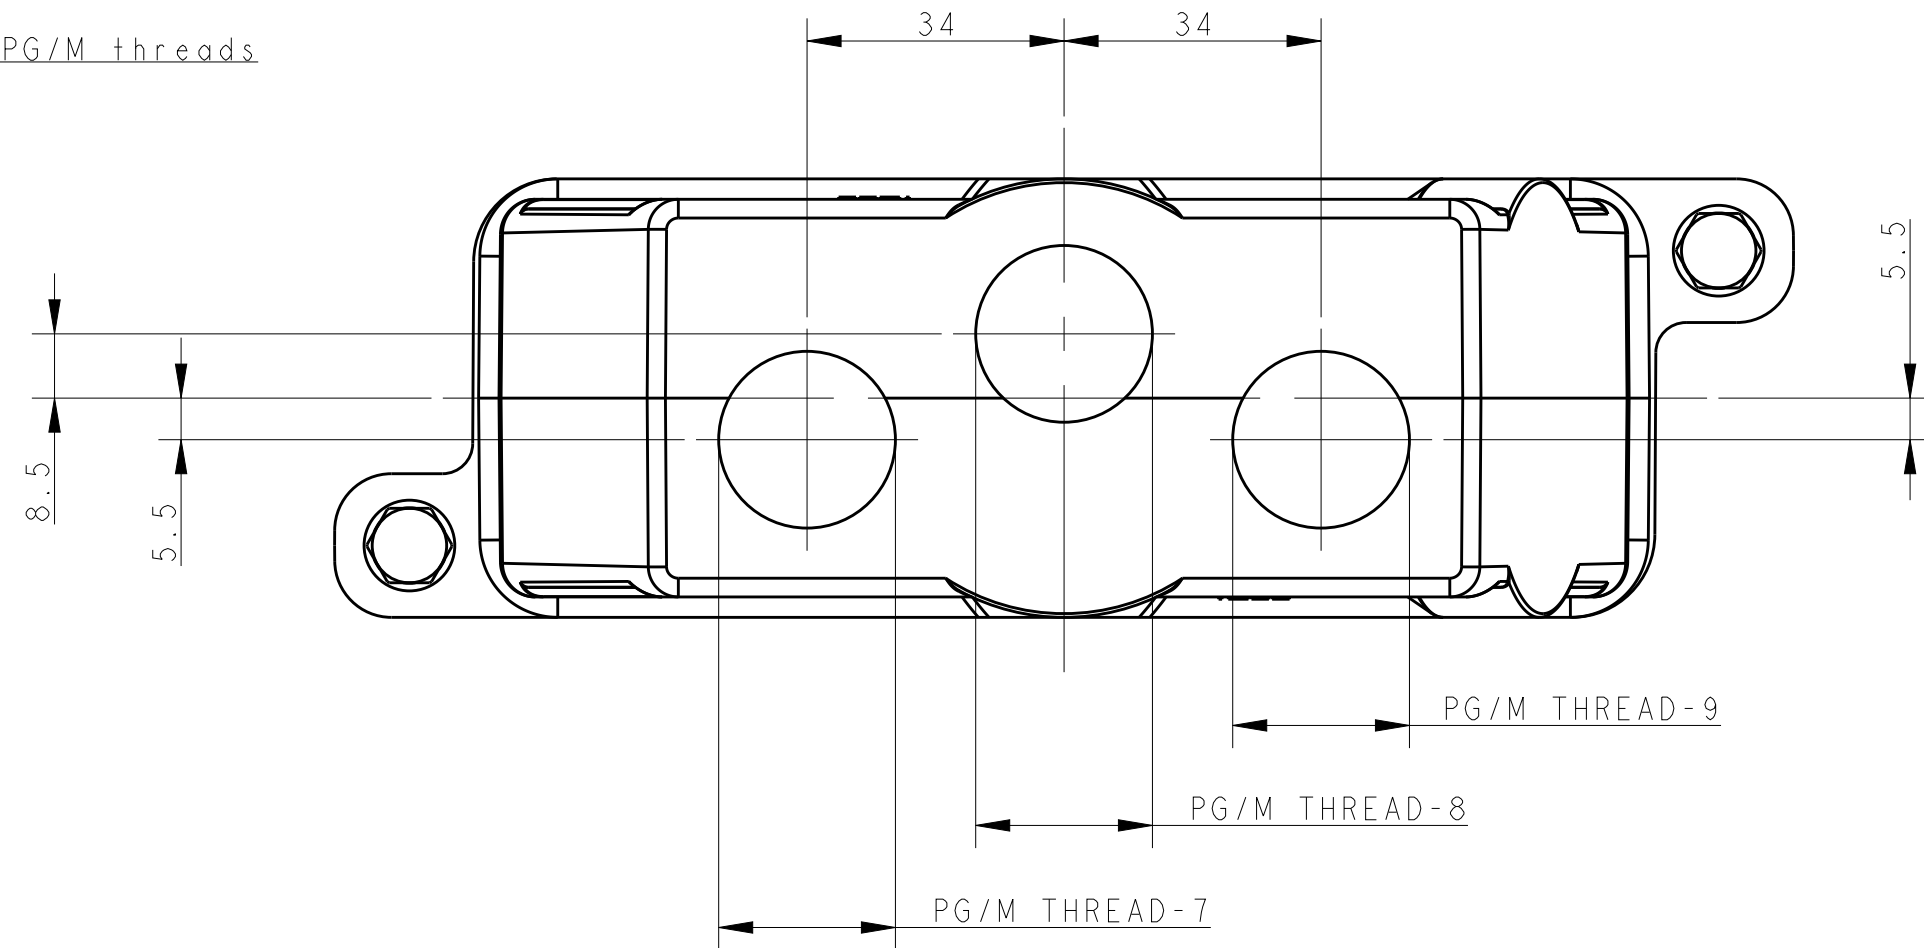

All dimension is same as TYPE 1,except those defined in this TYPE

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: SEE TABLE
OPERATION TEMPERATURE: -40°C~+125°C
DEGREE OF PROTECTION: IP68 (MATED)

注释:
1. 技术参数:
壳体材料: 铝合金
表面处理: 见表格
工作温度: -40°C~+125°C
防护等级: IP68 (配合)

TI920240325-000	POWDER COATED BLACK	H24BPR-TGH-3M25	M25	M25	M25	-	-	-	-	-	-	TYPE 6
TI920240321-000	POWDER COATED BLACK	H24BPR-TGH-3PG21	-	-	-	PG21	PG21	PG21	-	-	-	TYPE 5
TI920240225-100	POWDER COATED BLACK	H24BPR-TGH-2M25	-	-	-	-	-	-	M25	M25	-	TYPE 4
TI920241232-000	POWDER COATED SILVER WHITE	H24BPR-TGH-2M32	-	-	-	-	-	-	M32	M32	-	TYPE 3
TI920240240-000	POWDER COATED BLACK	H24BPR-TGH-2M40	-	-	-	-	-	-	M40	M40	-	TYPE 2
TI920240140-100	POWDER COATED BLACK	H24BPR-TGH-M40	-	-	-	-	-	-	-	-	M40	
TI920241140-000	POWDER COATED SILVER WHITE	H24BPR-TGH-M40	-	-	-	-	-	-	-	-	M40	TYPE 1
TI920241136-000	POWDER COATED SILVER WHITE	H24BPR-TGH-PG36	-	-	-	-	-	-	-	-	PG36	
TI920241132-000	POWDER COATED SILVER WHITE	H24BPR-TGH-M32	-	-	-	-	-	-	-	-	M32	
TI920241129-000	POWDER COATED SILVER WHITE	H24BPR-TGH-PG29	-	-	-	-	-	-	-	-	PG29	
TI920241125-000	POWDER COATED SILVER WHITE	H24BPR-TGH-M25	-	-	-	-	-	-	-	-	M25	
TI920241121-000	POWDER COATED SILVER WHITE	H24BPR-TGH-PG21	-	-	-	-	-	-	-	-	PG21	
TI920240140-000	POWDER COATED BLACK	H24BPR-TGH-M40	-	-	-	-	-	-	-	-	M40	
TI920240136-000	POWDER COATED BLACK	H24BPR-TGH-PG36	-	-	-	-	-	-	-	-	PG36	
TI920240132-000	POWDER COATED BLACK	H24BPR-TGH-M32	-	-	-	-	-	-	-	-	M32	
TI920240129-000	POWDER COATED BLACK	H24BPR-TGH-PG29	-	-	-	-	-	-	-	-	PG29	
TI920240125-000	POWDER COATED BLACK	H24BPR-TGH-M25	-	-	-	-	-	-	-	-	M25	
TI920240121-000	POWDER COATED BLACK	H24BPR-TGH-PG21	-	-	-	-	-	-	-	-	PG21	TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.				DATE: 15JUN2015	REV: 0	STE		TE Connectivity	
DIMENSIONS: (mm)				DATE: 15JUN2015	REV: 0	H24BPR-TGH-PG/M		NAME	
MATERIAL: -				DATE: 15JUN2015	REV: 0	108-137014		PRODUCT SPEC	
FINISH: -				DATE: 15JUN2015	REV: 0	114-137014		APPLICATION SPEC	
WEIGHT: -				DATE: 15JUN2015	REV: 0	Customer Drawing		SCALE: 1:1	
SHEET 1 OF 1				DATE: 15JUN2015	REV: 0	REV A		RESTRICTED TO	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

<u>T1920240121-000</u>	<u>T1920240125-000</u>	<u>T1920240129-000</u>	<u>T1920240132-000</u>	<u>T1920240136-000</u>	<u>T1920240140-000</u>
<u>T1920241121-000</u>	<u>T1920241125-000</u>	<u>T1920241129-000</u>	<u>T1920241132-000</u>	<u>T1920240225-100</u>	<u>T1920241136-000</u>
<u>T1920241140-000</u>	<u>T1920241232-000</u>	<u>T1920240240-000</u>	<u>T1920240325-000</u>		