

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	24APR2015	DL	CW

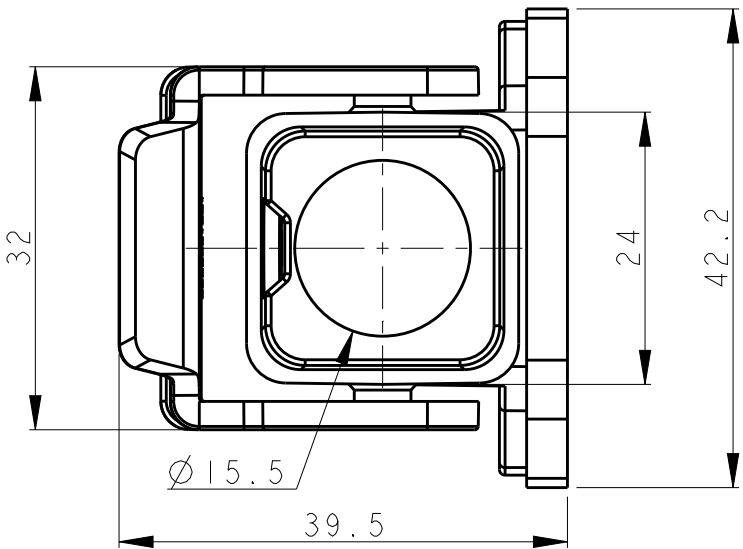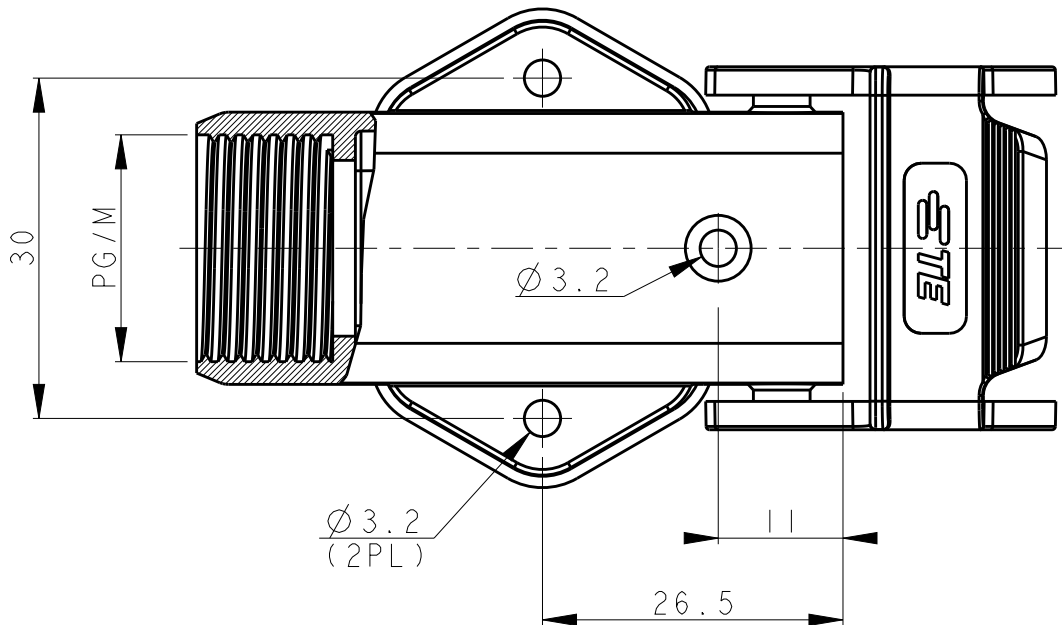

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: PC
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: PC
工作温度: -40-+125°C
防护等级: IP65(配合)

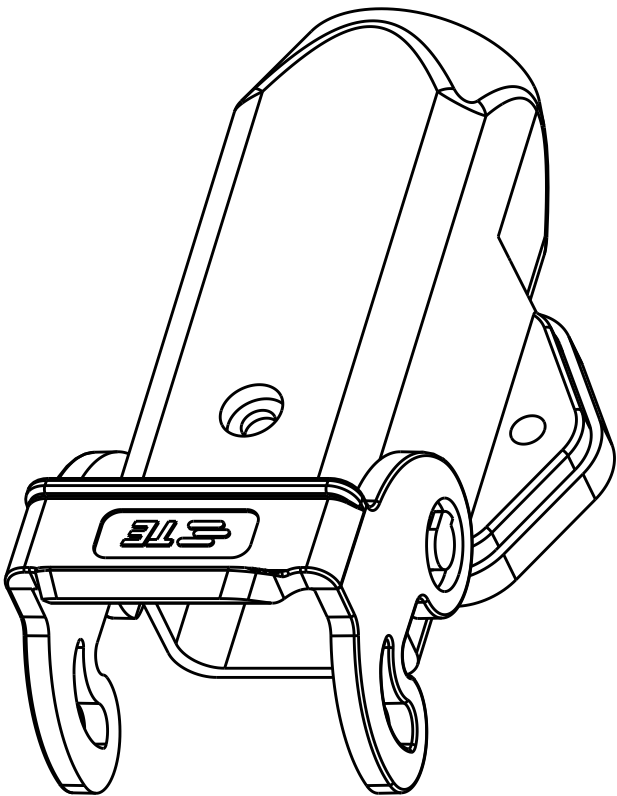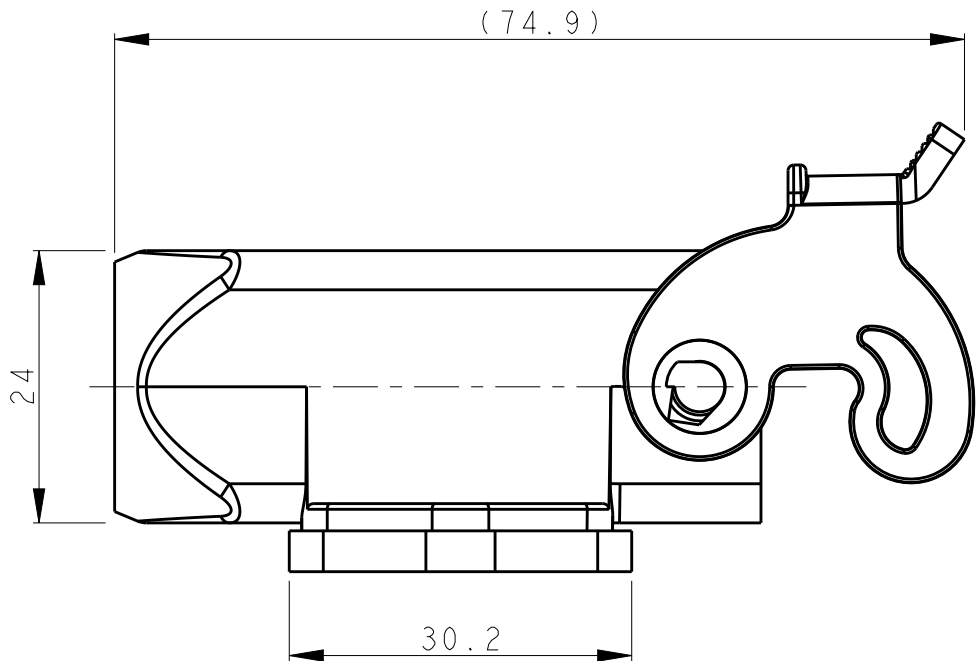

TI6I9031111-000	H3A-AGSV-PG11	PG11
TI6I9031116-000	H3A-AGSV-M16	M16
TI6I9031120-000	H3A-AGSV-M20	M20
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 24APR2015

DAVID LI

CHK 24APR2015

CHRIS WANG

APVD 24APR2015

XU XIANG

PRODUCT SPEC

108-137134

APPLICATION SPEC

114-137134


WEIGHT

-

CUSTOMER DRAWING

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

-

FINISH

-



TE Connectivity

NAME
H3A-AGSV-PG/M

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 - ©-TI6I90311XX000 -

SCALE 3:2 SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T1619031120-000](#)