




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	4APR2015	GY	CW
	B	ECR-15-013759	27SEP2015	DW	CW
	B1	ECR-16-011988	24AUG2016	YC	CW
	C	ECR-18-016778	12NOV2018	GY	CW

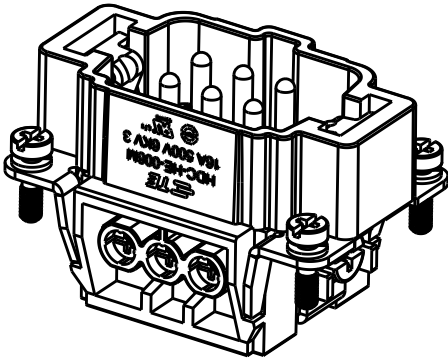


TYPE I, T2040062101-000, WITH LOGO
类型 I, T2040062101-000, 带LOGO

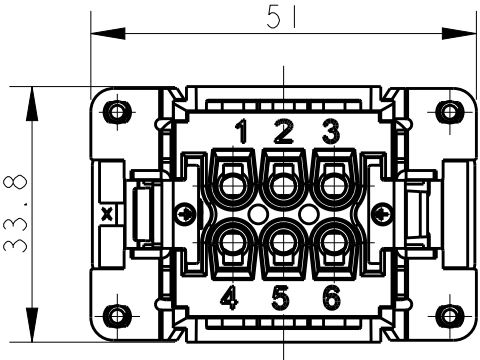



M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐锁紧力矩1.2Nm

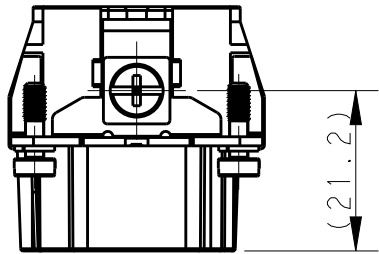

6X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
6X M3螺丝, 推荐锁紧力矩0.5Nm

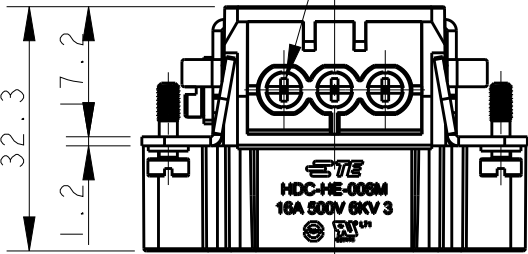


4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

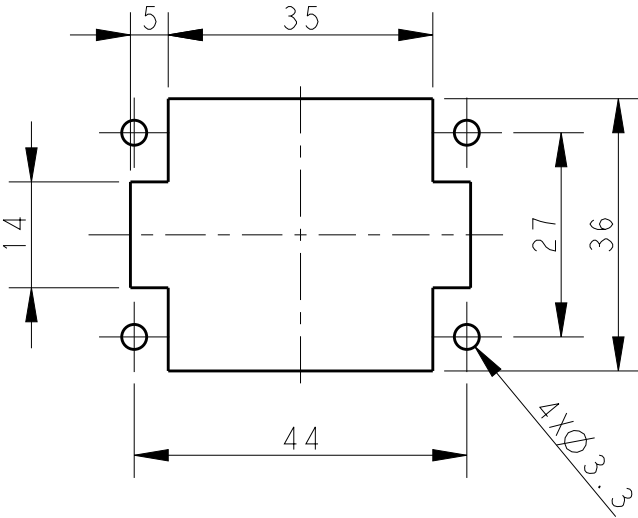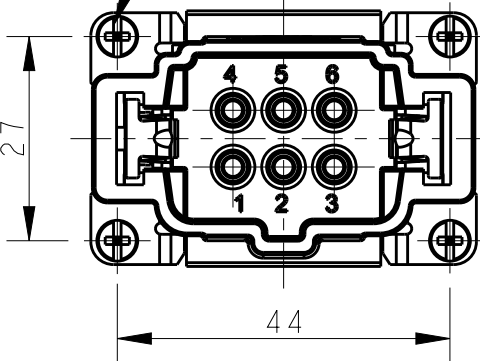

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

NOTES:
I. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: $0.5mm^2 \sim 2.5mm^2$ (AWG20-AWG14)
CONTACT TYPE: SCREW CLAMP (M3)

注释:
I. 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: $0.5mm^2 \sim 2.5mm^2$ (AWG20-AWG14)
接线类型: 螺丝压接 (M3)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GINO YAO 4APR2015	 TE Connectivity						
		CHK CHRIS WANG 4APR2015							
DIMENSIONS: mm		APVD XIANG XU 4APR2015	NAME HE-006-M						
		PRODUCT SPEC 108-137044	SIZE CAGE CODE DRAWING NO RESTRICTED TO						
		APPLICATION SPEC 114-137044							
		WEIGHT -							
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		A300779C-T2040062101000							
MATERIAL - -		FINISH - -		SCALE 1:1		SHEET 1 OF 2		REV C	
CUSTOMER DRAWING									

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS




P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

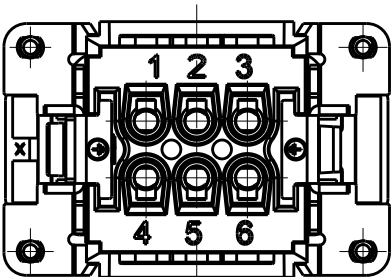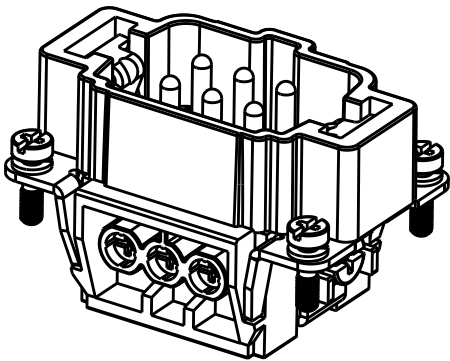

NOTE:
ALL SPEC REFER TO TYPE 1

注释:
所有产品规范参照 TYPE 1


TYPE 2,T2040062101-001,WITHOUT LOGO,
UNDEFINED DIMENSIONS REFER TO ITEM 1.
类型 2,T2040062101-001,不带LOGO,未注尺寸参考类型1.

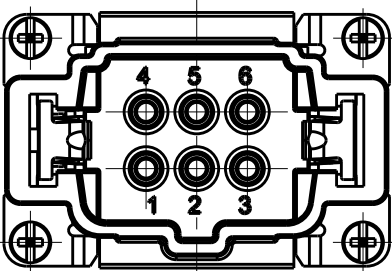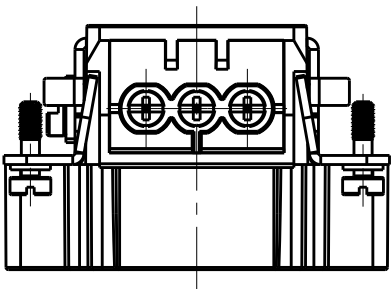

T2040062101-000	HE-006-M	HE-006 MALE INSERT HE-006 公插	TYPE 1
T2040062101-001	HE-006-M	HE-006 MALE INSERT,WITHOUT LOGO HE-006 公插,无LOGO	TYPE 2
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

FINISH

-

DWN 4APR2015

GINO YAO

CHK 4APR2015

CHRIS WANG

APVD 4APR2015

XIANG XU

PRODUCT SPEC

108-137044

APPLICATION SPEC

114-137044

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME
HE-006-M

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

©T2040062101000

-

SCALE

1:1

SHEET

2 OF 2

REV

C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T2040062101-001](#)