





REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	01FEB2016	DW	CW

NOTES:


- I. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
FLAMMABILITY: UL94V-0
OPERATION TEMPERATURE: -40°C~+125°C

注释:

- I. 技术参数:
绝缘材料: PC
阻燃等级: UL94V-0
工作温度: -40°C~+125°C

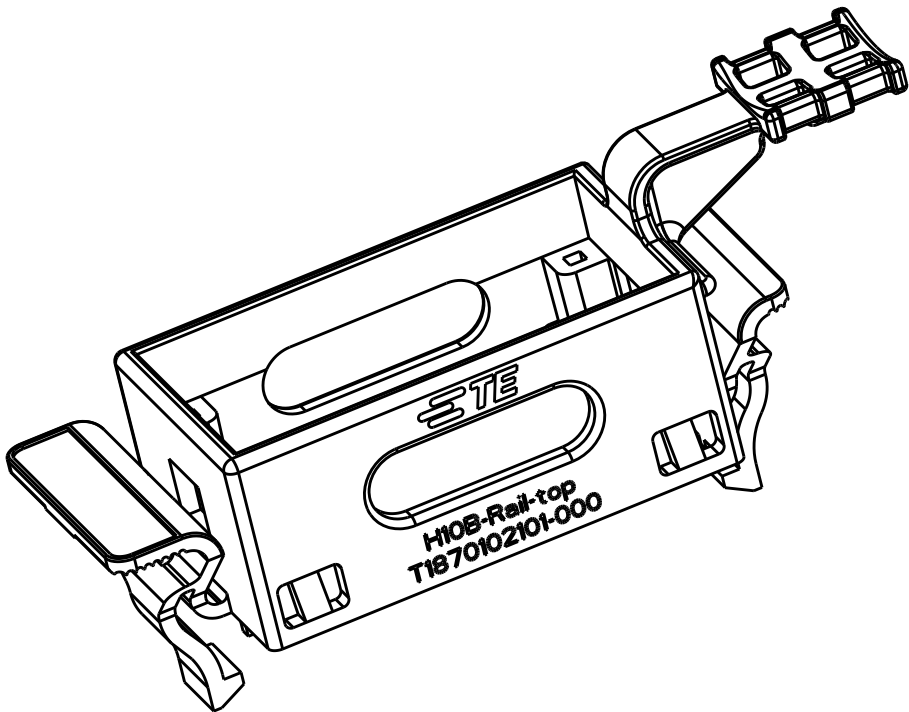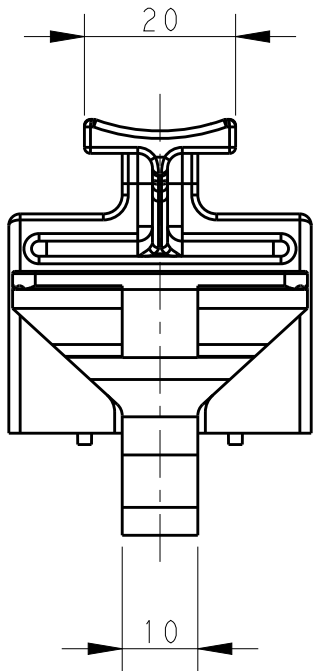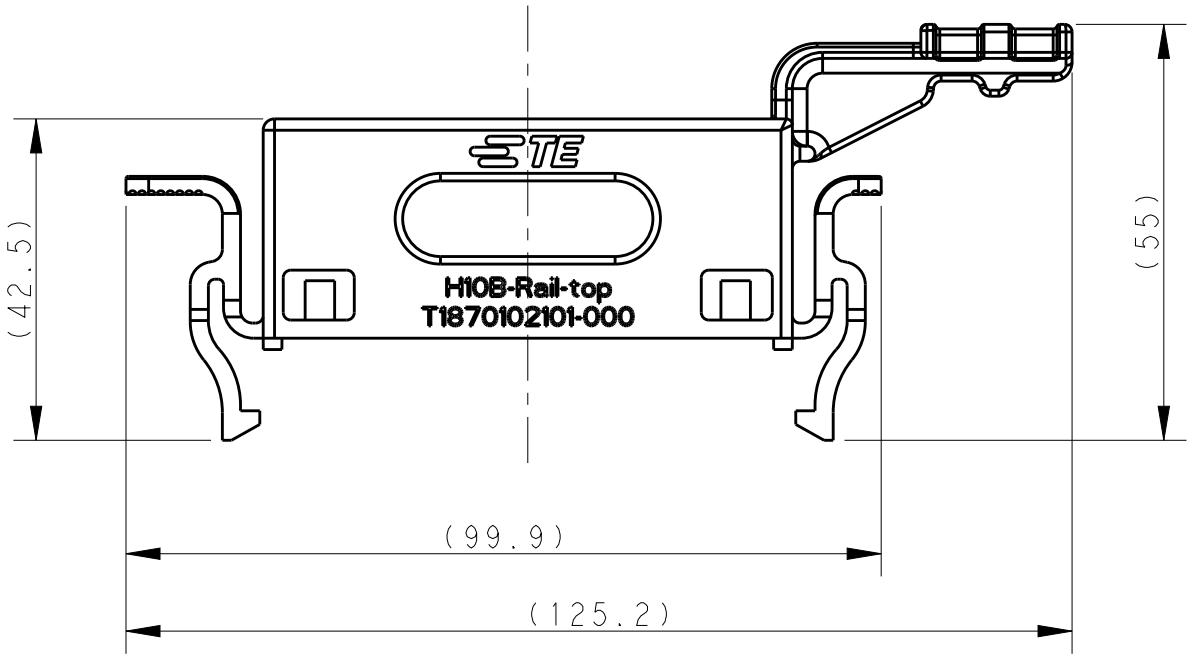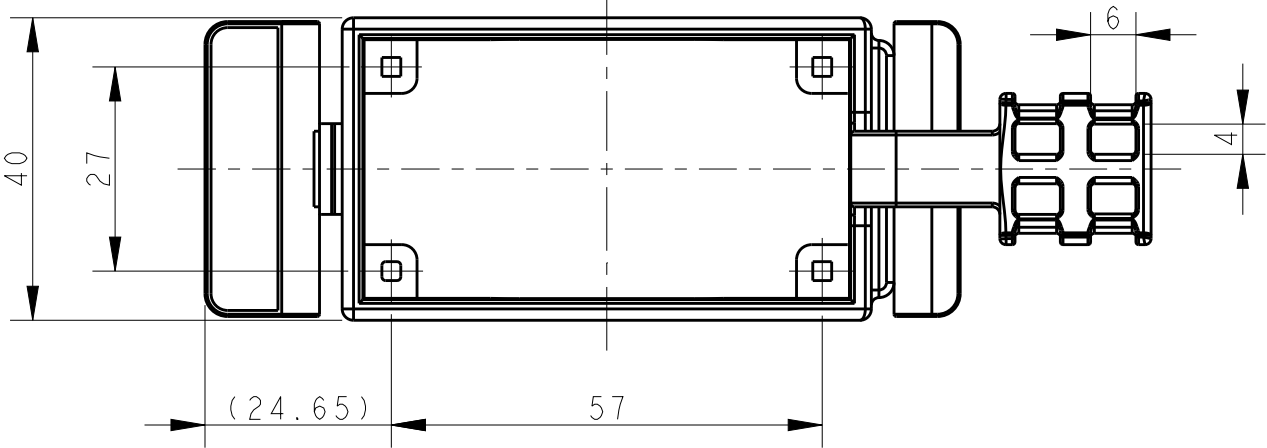

T1870102101-000	H10B-RAIL-TOP	H10B INSERT MOUNTING TOP FRAME H10B 芯片导轨安装支架上部
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 01FEB2016 DAVID WANG	 TE Connectivity		
DIMENSIONS: mm		CHK 01FEB2016 CHRIS WANG			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 01FEB2016 XIANG XU	NAME H10B-RAIL-TOP		
		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
MATERIAL	FINISH	-	A300779C-T1870102101000		
		-	CUSTOMER DRAWING SCALE 1:1 SHEET 1 OF 1 REV A		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T1870102101-000](#)