

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -





ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	23JUN2015	DW	CW

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOUSING MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: POWDER COATED, GREY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
下壳材料: 铝合金
表面处理: 粉末涂层, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

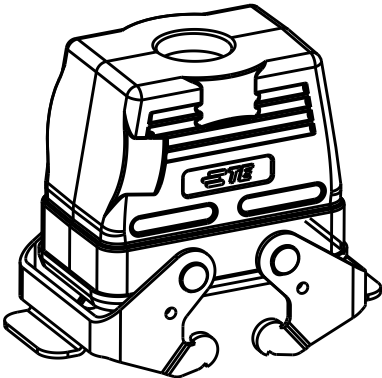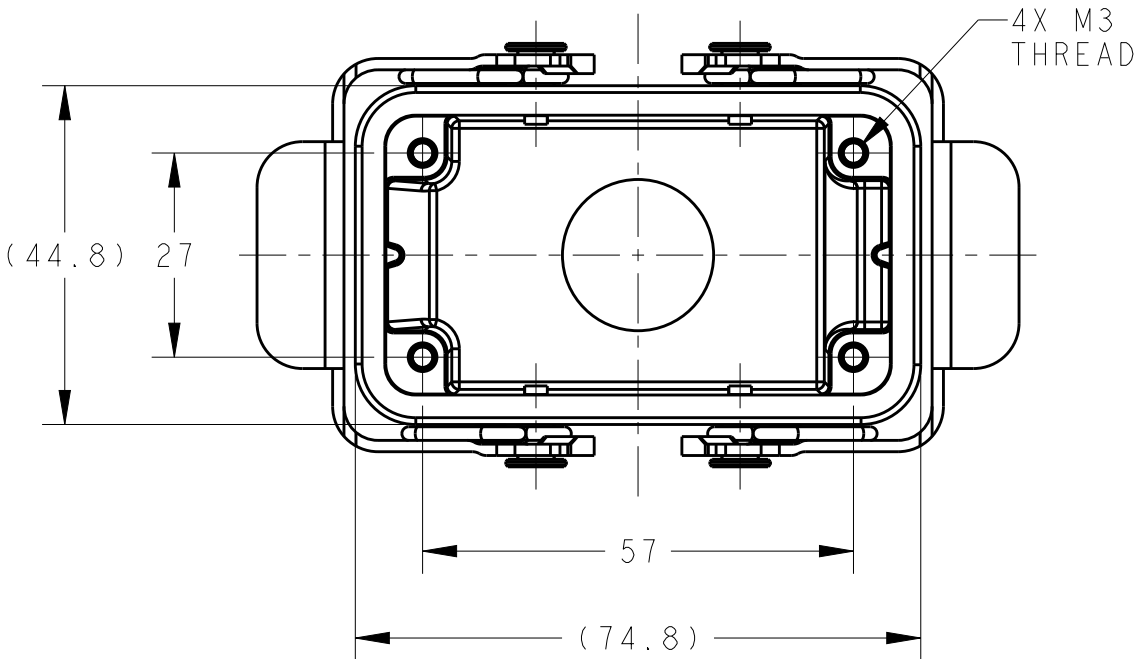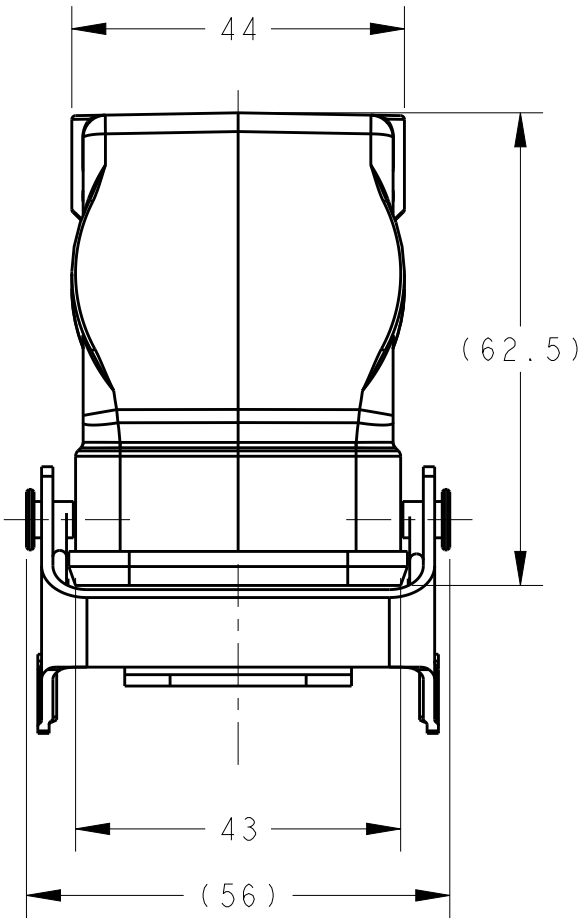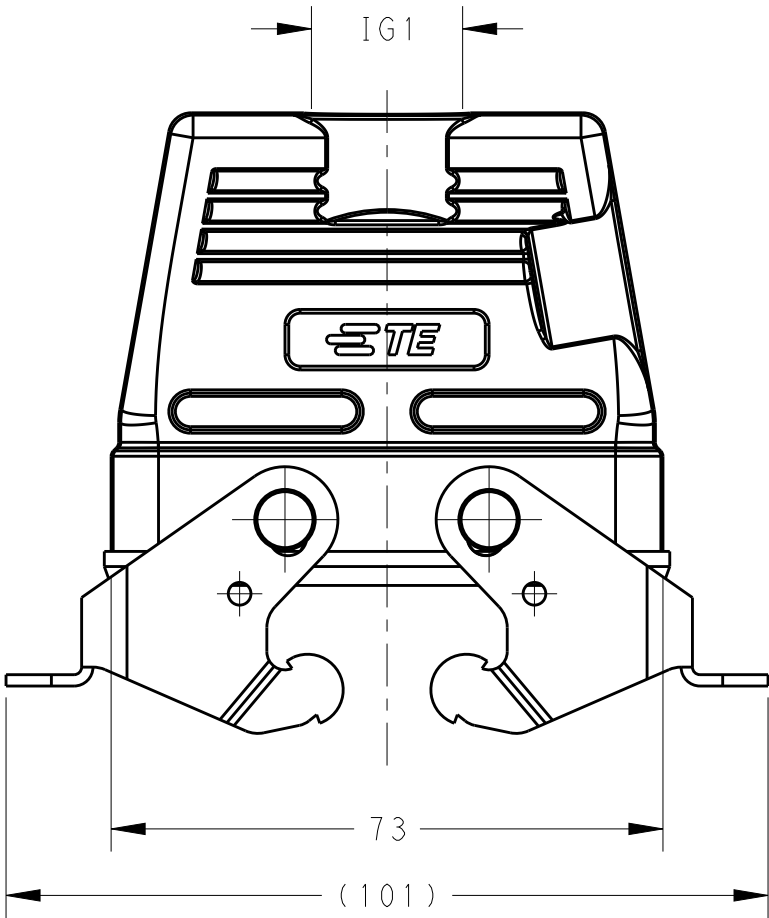

SCALE 1:2

T1710102116-000	H10B-TBF-PG16	PG16
T1710102120-000	H10B-TBF-M20	M20
T1710102125-000	H10B-TBF-M25	M25
PART NUMBER	DESCRIPTION	IG1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23JUN2015 David Wang	 TE Connectivity		
DIMENSIONS: mm		CHK 23JUN2015 Chris Wang			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 23JUN2015 Xiang Xu	NAME H10B-TBF-M/PG		
0 PLC ±-		PRODUCT SPEC 108-137013	SIZE A300779		
1 PLC ±-		APPLICATION SPEC 114-137013			
2 PLC ±-		WEIGHT -	CAGE CODE C-T17101021XX000		
3 PLC ±-		Customer Drawing			
4 PLC ±-		SCALE 1:1	SHEET 1 OF 1		
ANGLES ±-		REV A			
FINISH -					
MATERIAL -					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T1710102120-000](#)