

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -





ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	23JUN2015	DW	CW

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOUSING MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: POWDER COATED, GREY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
下壳材料: 铝合金
表面处理: 粉末涂层, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

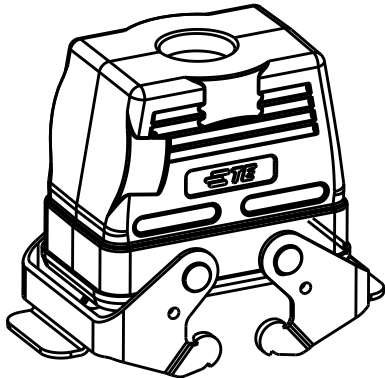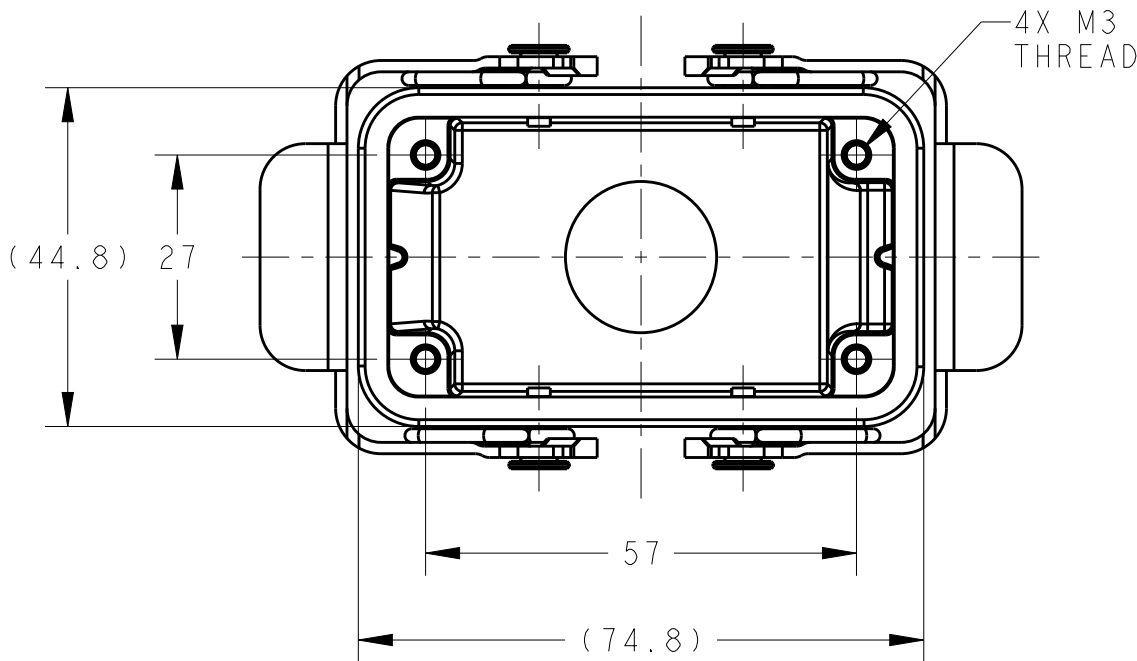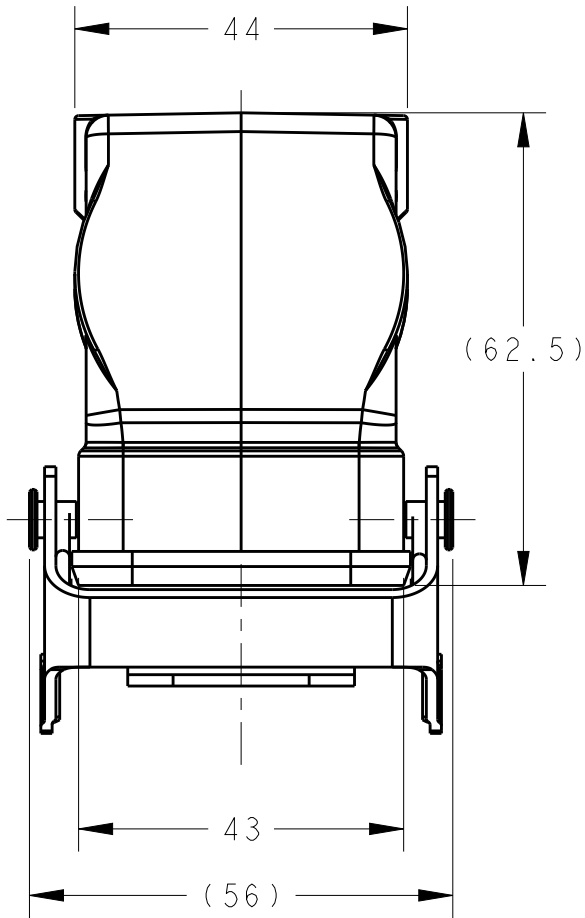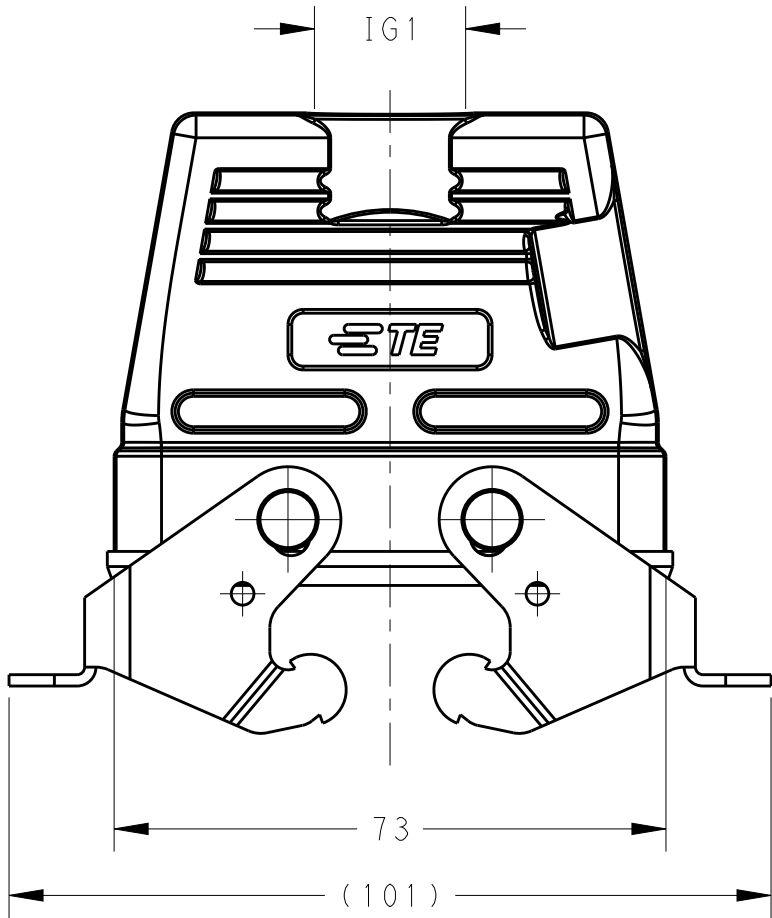

SCALE 1:2

T1710102116-000	H10B-TBF-PG16	PG16
T1710102120-000	H10B-TBF-M20	M20
T1710102125-000	H10B-TBF-M25	M25
PART NUMBER	DESCRIPTION	IG1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23JUN2015 David Wang	TE Connectivity H10B-TBF-M/PG		
DIMENSIONS:		CHK 23JUN2015 Chris Wang			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 23JUN2015 Xiang Xu			
mm		PRODUCT SPEC			
		108-137013	NAME		
0 PLC ±-		APPLICATION SPEC	H10B-TBF-M/PG		
1 PLC ±-		114-137013	SIZE CAGE CODE DRAWING NO		
2 PLC ±-		WEIGHT	RESTRICTED TO		
3 PLC ±-		Customer Drawing	A300779C-T17101021XX000		
4 PLC ±-			SCALE 1:1 SHEET 1 OF 1 REV A		
ANGLES ±-					
FINISH					
-					
-					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T1710102125-000](#)