
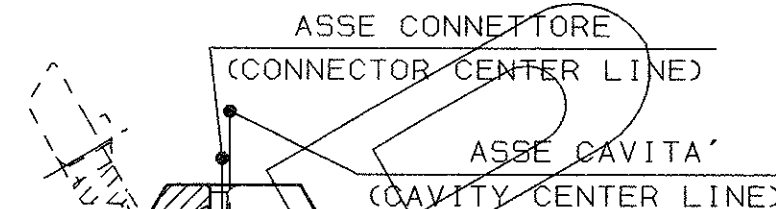
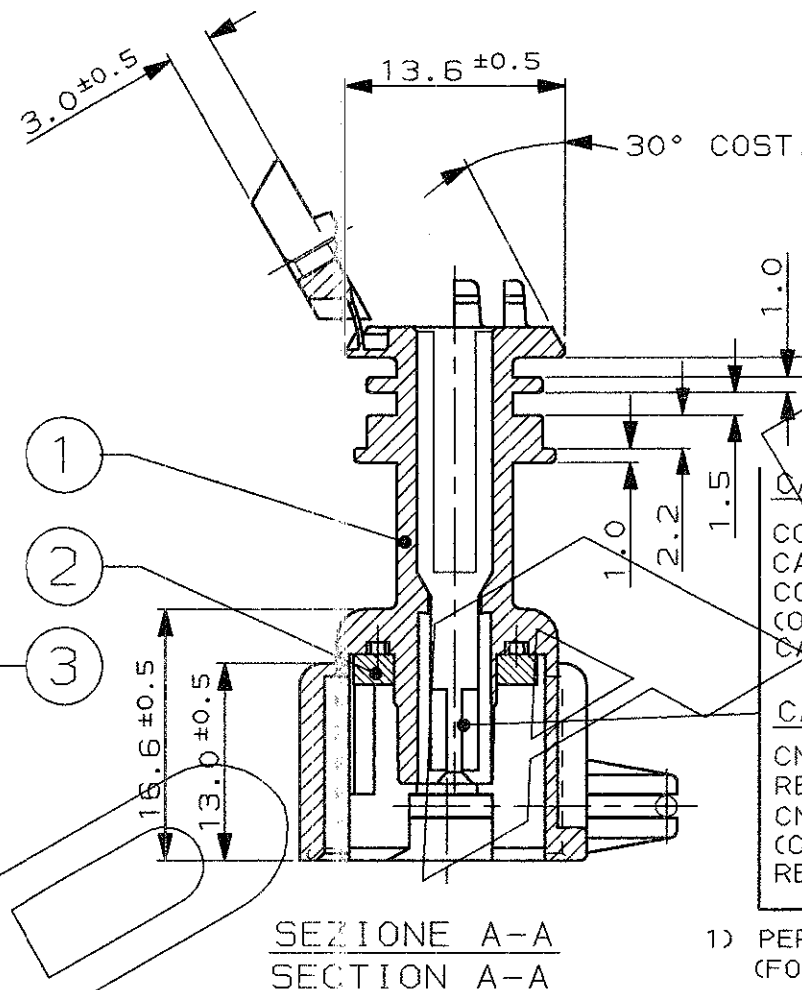


CONNETTORE TIPO A (CON MOLLA DI RITEGNO ESTERNA)
CONNECTOR TYPE A (WITH EXTERNAL SPRING)

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm
(DIMENSIONS IN mm)

METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

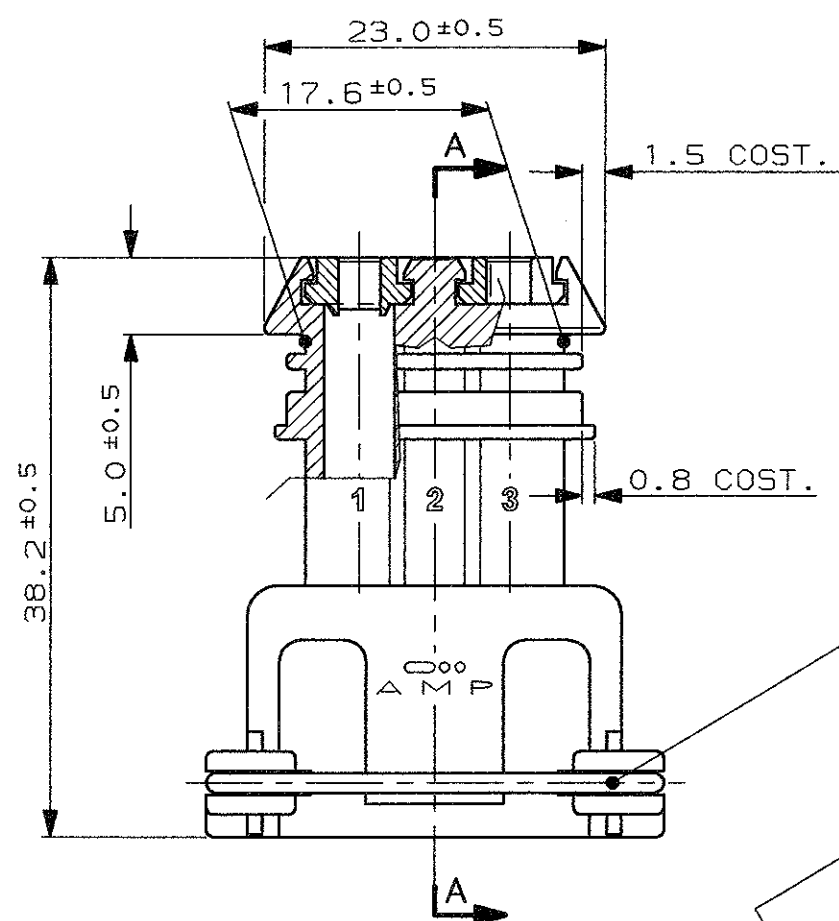

CAVITA' ADATTA PER TERMINALI JUNIOR POWER TIMER:


CONTATTO P/N 929939-1 0 -3 CON GOMMINO P/N 828904-1
CAVO ISOLANTE RIDOTTO ϕ 1.5-2.1mm; SEZIONE 0.5-1.0mm²
CONTATTO P/N 929937-1 0 -3 CON GOMMINO P/N 828905-1
(O GOMMINO P/N 282536-1 SOLO PER CAVI SEZIONE 2.5mm²)
CAVO ISOLANTE RIDOTTO ϕ 2.2-3.0mm; SEZIONE 1.5-2.5mm²

CAVITY SUITABLE FOR JUNIOR POWER TIMER CONTACT:

CNT.P/N 929939-1 OR -3 PLUS WIRE SEAL P/N 828904-1
REDUCED INS. CABLE ϕ 1.5-2.1mm; WIRE RANGE 0.5-1.0mm²
CNT.P/N 929937-1 OR -3 PLUS WIRE SEAL P/N 828905-1
(OR WIRE SEAL P/N 282536-1 ONLY FOR WIRES SECT.2.5mm²)
REDUCED INS. CABLE ϕ 2.2-3.0mm; WIRE RANGE 1.5-2.5mm²


1) PER DIMENSIONI CONTROPARTE VEDERE FOGLIO 2 DI 2.
(FOR PIN HEADER DIMENSIONS SEE SHEET 2 OF 2).

SEZIONE A-A
SECTION A-A

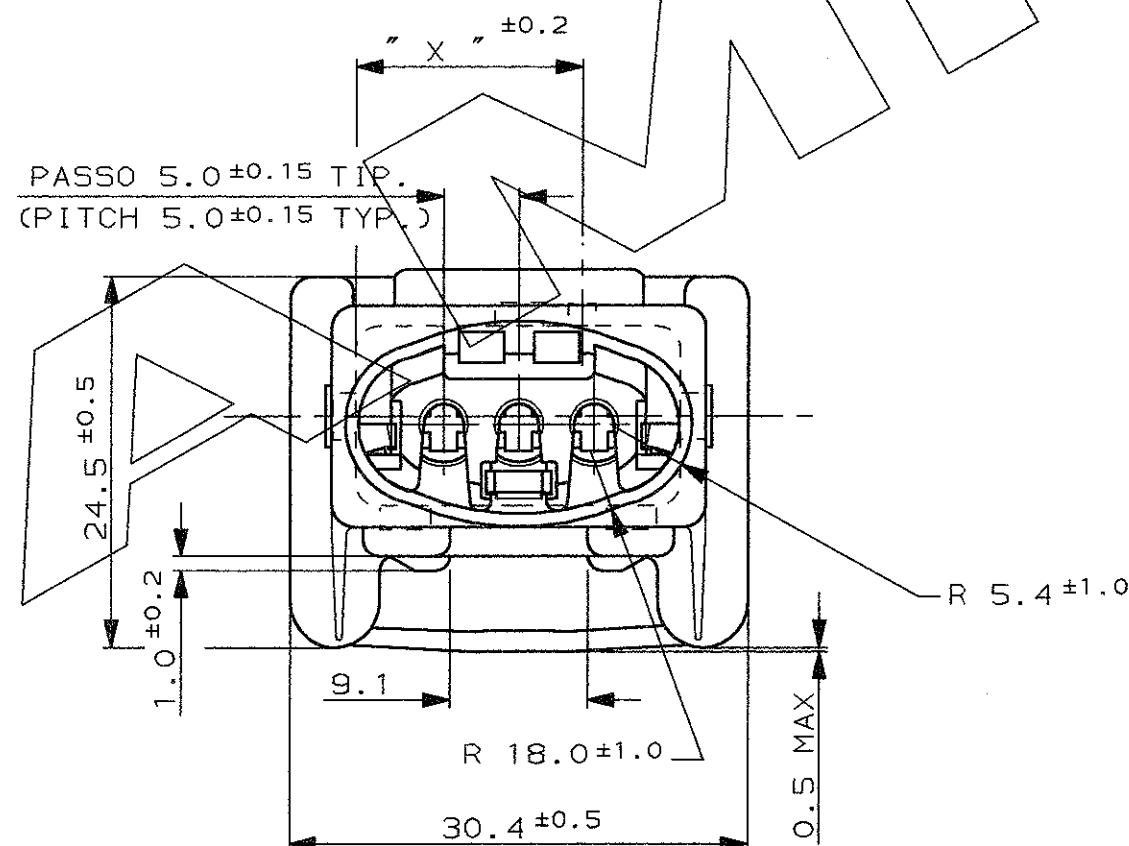

---	---	---	3	////	ACCIAIO INOX (STAINLESS STEEL)	MOLLA (SPRING)
15.1	NATURALE (NATURAL)	282800-1	2	NATURALE (NATURAL)	GOMMA (SILICONE RUBBER)	GUARNIZIONE (RUBBER GASKET)
13.3	BLU (BLUE)	282689-1	1	////	PA 6.6	BLOCCHETTO (HOUSING)
4.9	MARRONE (BROWN)	282688-1	N°	FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	DESCRIZIONE (DESCRIPTION)
6.7	VERDE (GREEN)	282687-1	(ITEM)			
8.5	GRIGIO (GREY)	282686-1				
" X "	COLORE COLOR	NUMERO AMP PART. N°	ASSY REV.			

D	ECR-14-003472	MP	24MAR 2014	CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO	
C	REVISED FOR ET00-0385-99	M.P.	2-4 01	THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION 19	
B	IN PRODUZIONE P/N 282800-1 (RELEASED FOR PRODUCTION P/N 282800-1) EC ET00-0285-96	A.F.	9 JUL '96	© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING			
A1	AGGIUNTO PN 282800-1 (ADDED PN. 282800-1) EC ET00-0175-96	A.F.	1 APR '96	TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)	DIAM. ISOLANTE (INS. DIA. RANGE) 1.5-3.0 (REDUCED INS. CABLE)	RANGO FILO (WIRE RANGE) 0.5-2.5 mm ²	SCALA (SCALE) ***
A	IN PRODUZIONE (RELEASED FOR PRODUCTION) EC ET00-0205-95	M.P.	2 NOV '95	± 0.3 ANGOLI (ANGLES) ± 2°	AMP AMP ITALIA S.p.A. Corso F.lli Cervi, 15 COLLEGNO (TORINO)		
2	AGGIORNATO PROFILO MOLLA (REVISED SPRING PROFILE)	M.P.	5-5 '95	DIS. 25 NOV. '94 (DR.) M. PALMA	DESCRIZIONE (DESCRIPTION) 3 WAY J.P.T. SPLASH PROOF CONN. ASS'Y WITH SECONDARY LOCK		
1	P/Ns WERE 94-51164-1 TO -4 CANCELLED P/N 94-51164-5	M.P.	23-12 '94	CONT. 25 NOV. '94 (CHK) C. TARTARI			
0	FIRST ISSUE	M.P.	25-11 '94	APP. — (APP.)	LOC. SIZE NUMERO (DWG NO)	(MASTER)	REV. FOGLIO (SHEET)
REV. (REV.)	REVISIONI (REVISION RECORD)	DIS. (DR.)	DATA (DATE)		I A3 C-282686	D	1 DI (OF) 2



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282686-1](#)