

SYM	ECN	DESCRIPTION	DATE	APPR	
1	HK	First Release Drawing	03/20/08	- 1	
2	HK	Update contact tail length	07/04/12	-	
3	HK	Change dim. 30.84 to 30.81mm	08/27/13	I	
4	HK	Add pin diameter	11/14/13	I	

D-SUB TECHNICAL DATA

SHELL: Steel, 100u" Tin Over 50u" min nickel over 50u" min Copp

BODY: Glass-Filled Thermoplastic PBT,UL94V-0

CONTACTS: Copper alloy

15u"Gold over 50u" nickel on mating area 100u" tin over 50u" nickel on solder area

ELECTRICAL: Voltage rating 250 VAC/RMS


Current Rating :3 AMP

Withstanding Voltage >1000 VAC/RMS Insulation resistance >1000 M Ohms Contact resistance 20 mOhms max

MARKING: Amphenol-...(Series No.)

Commercial reference Manufacturing date

PRODUCT CODE

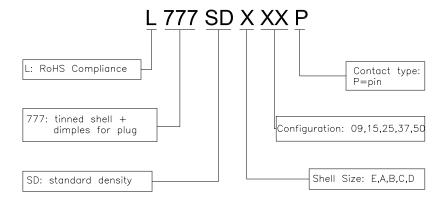

UNLESS OTHERWISE SPECIFIED TOLERANCES	APPROVAL DA	Amphenol		
U.S. METRIC	DRAWN Felix.Liu 08/2	//3		
. <i>X</i> +/- . <i>XX</i> +/- . <i>XXX</i> +/- 0.20	CHECKED Tony.Tang 08/2	Amphenol East Asia Lim		
.X +/- 0.50 .XX +/- 0.30 .XXX +/- 0.20 FRACTIONS +/- ANGLES +/- 5*		TITLE		
FOR MATERIALS AND FINISHES SEE NOTES	DRAWING FILE :	Stamped and formed contacts, SD S		
REMOVE SHARP EDGES	ANGLE OF PROJECTION			
DIMENSIONS		SIZE DRAWING NO.		
U.S. INCHES		A4 C L777SDXXXP		
METRIC MM	9	SCALE NONE SHEET 1 OF		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

L777SDC37P L777SDA15P L777SDB25P L777SDE09P