


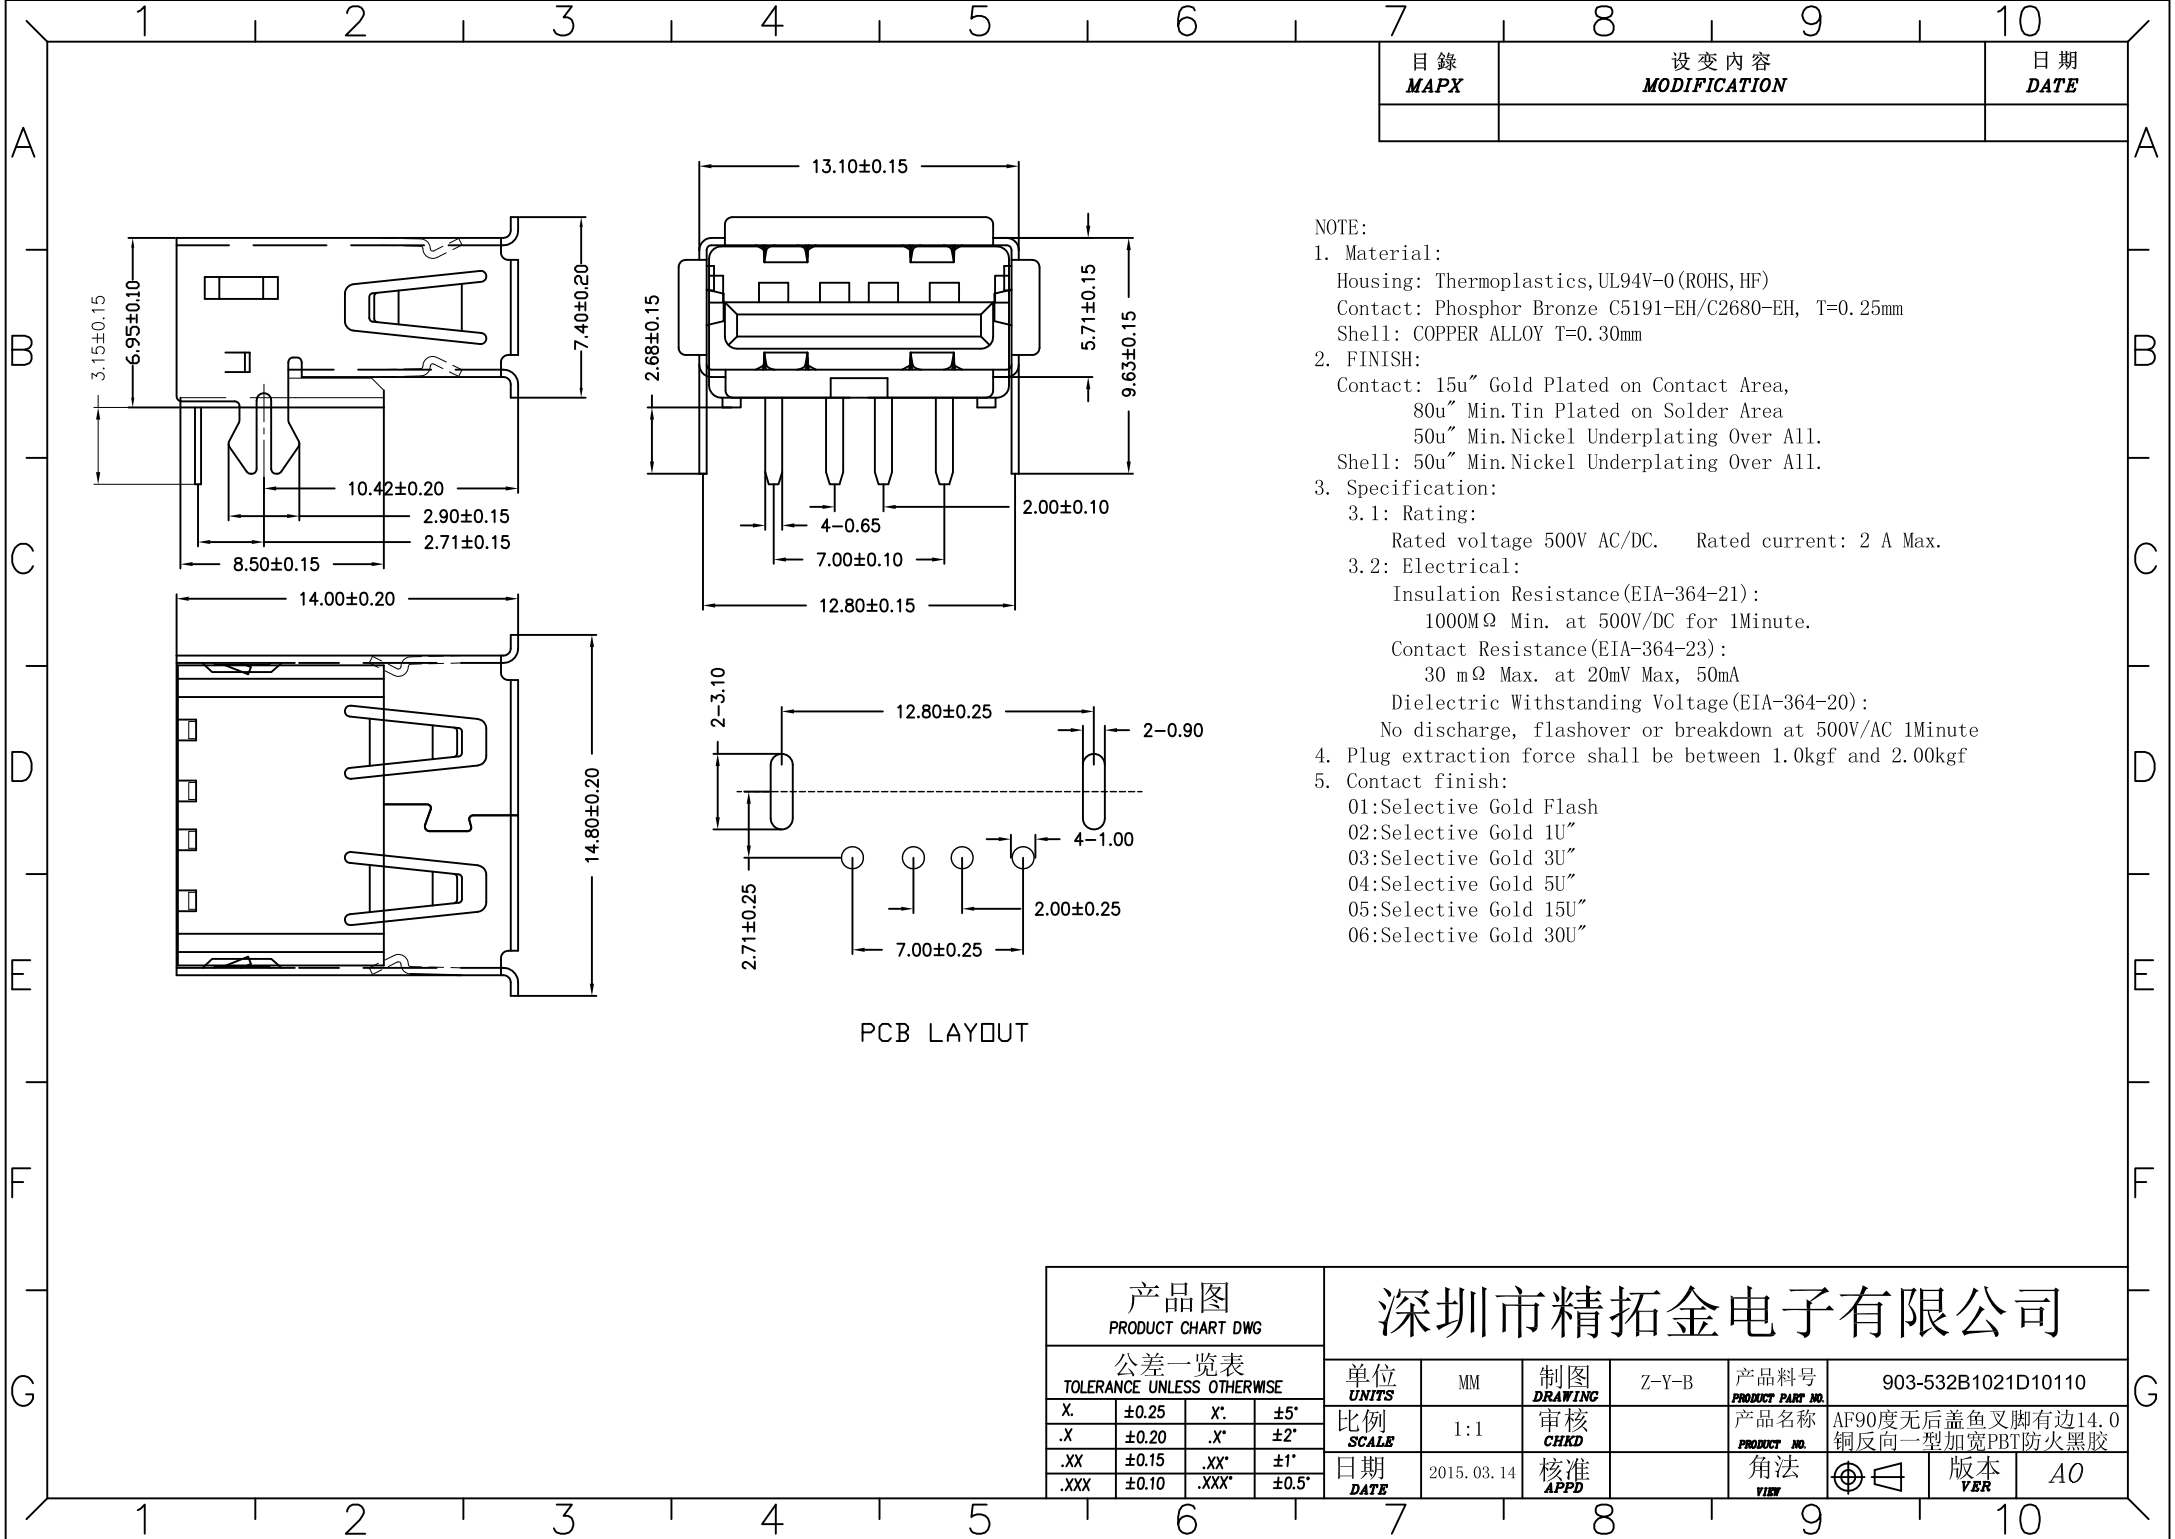

目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE

NOTE:

1. Material:
Housing: Thermoplastics, UL94V-0 (ROHS, HF)
Contact: Phosphor Bronze C5191-EH/C2680-EH, T=0.25mm
Shell: COPPER ALLOY T=0.30mm

2. FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min. Tin Plated on Solder Area
50u" Min. Nickel Underplating Over All.
Shell: 50u" Min. Nickel Underplating Over All.

3. Specification:
3.1: Rating:
Rated voltage 500V AC/DC. Rated current: 2 A Max.
3.2: Electrical:
Insulation Resistance (EIA-364-21):
1000MΩ Min. at 500V/DC for 1Minute.
Contact Resistance (EIA-364-23):
30 mΩ Max. at 20mV Max, 50mA
Dielectric Withstanding Voltage (EIA-364-20):
No discharge, flashover or breakdown at 500V/AC 1Minute

4. Plug extraction force shall be between 1.0kgf and 2.00kgf

5. Contact finish:
01: Selective Gold Flash
02: Selective Gold 1U"
03: Selective Gold 3U"
04: Selective Gold 5U"
05: Selective Gold 15U"
06: Selective Gold 30U"

PCB LAYOUT

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	903-532B1021D10110
X.	±0.25	X'.	±5°	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF90度无后盖鱼叉脚有边14.0 铜反向一型加宽PBT防火黑胶
.X	±0.20	.X'	±2°	日期 DATE	2015.03.14	核准 APPD		角法 VIEW	⊕ ⊞
.XX	±0.15	.XX'	±1°					版本 VER	A0
.XXX	±0.10	.XXX'	±0.5°						