

## MQS

TE Internal #: 1473244-3

Housing for Female Terminals, Wire-to-Board, 81 Position, 2.54 mm / 5.8 mm [.1 in / .228 in] Centerline, Sealable, Black, Wire & Cable,

Signal

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings











Connector System: Wire-to-Board

Number of Positions: 81

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 2.54 mm, 5.8 mm [ .1 in, .228 in ]

Sealable: Yes

## **Features**

## **Product Type Features**

Mixed & Hybrid Connector	Yes
Connector Shape	Rectangular
Connector System	Wire-to-Board
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	81
Number of Rows	3, 4
Electrical Characteristics	
Nominal Voltage Architecture	12 V
Body Features	

Black

Primary Product Color



Contact Features	
Contact Size	.63mm, 2.8mm
Contact Type	Receptacle
Mechanical Attachment	
Mating Alignment Type	Polarizing Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT
Centerline (Pitch)	2.54 mm, 5.8 mm[.1 in][.228 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Method	Tray
Other	
Connector Position Assurance Capable	No

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per



homogenous material. Also BFR/CFR/PVC Free


## Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

## Compatible Parts

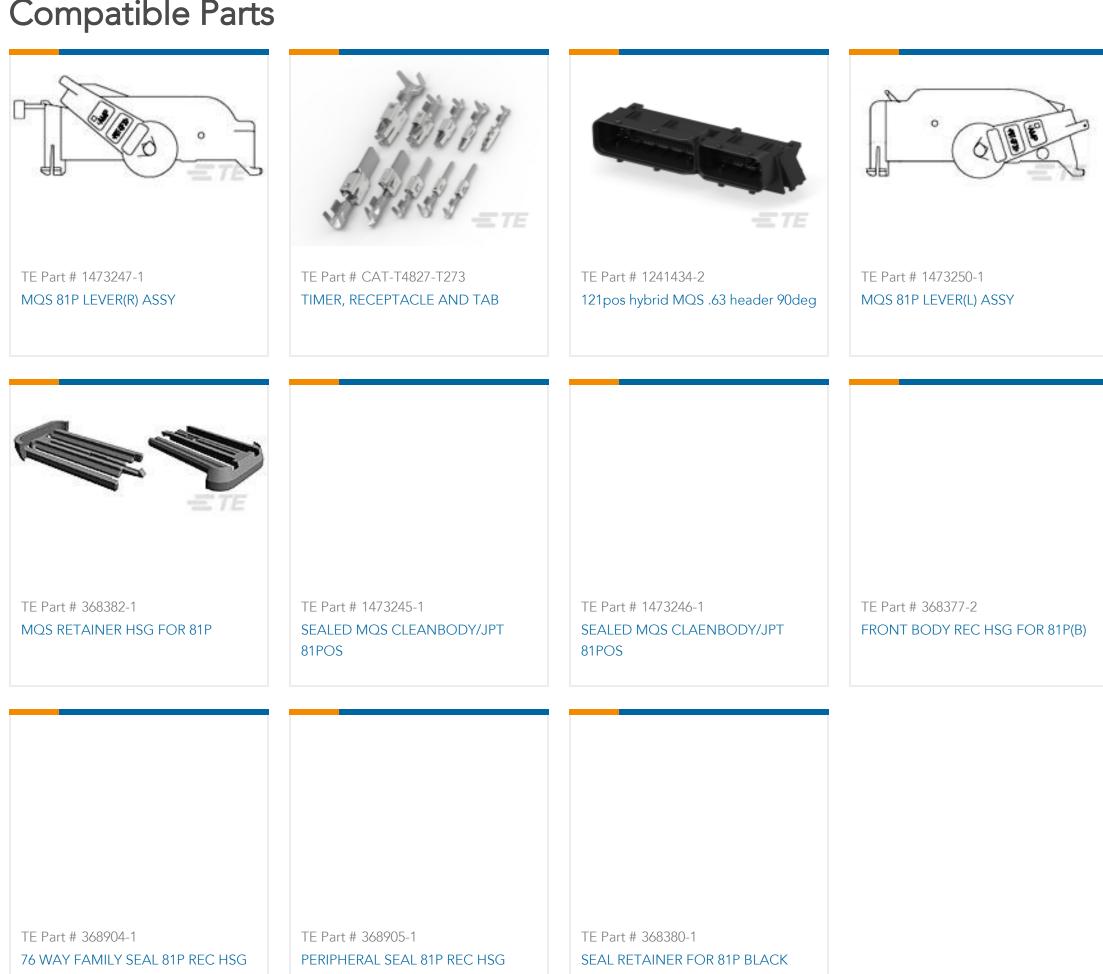

# Customers Also Bought
















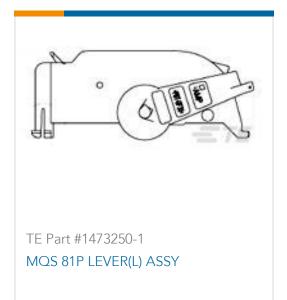





## **Documents**

**Product Drawings** 

MQS/JPT 81POS PLUG ASSY

Japanese

## **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_1473244-3\_A1.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1473244-3\_A1.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1473244-3\_A1.3d\_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

Housing for Female Terminals, Wire-to-Board, 81 Position, 2.54 mm / 5.8 mm [.1 in / . 228 in] Centerline, Sealable, Black, Wire & Cable, Signal



**Application Specification** 

English

**Application Specification** 

English