

- Precision 140 MHz SAW Filter
- 22 MHz Bandwidth
- 3.8 x 3.8 x 1.4 mm Surface-mount Package
- Complies with Directive 2002/95/EC (RoHS)




Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Maximum DC Voltage on any Non-ground Terminal	3	VDC
Storage Temperature Range in Tape and Reel	-40 to +85	°C
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s	

SF2182D

**140 MHz
SAW Filter**



SM3838-8

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Nominal Center Frequency	F_C	1		140		MHz
Insertion Loss	IL_{MAX}	1		13.5	15.0	dB
Insertion Loss Variation over Temperature		1			1	dB
3 dB Bandwidth		1	40	43		MHz
Passband Amplitude Ripple, Single-ended Matching, 120 to 160 MHz		1		0.8	1.5	dB _{P-P}
Passband Amplitude Ripple, Balanced Matching, 120 to 160 MHz		1		1.2	2.0	dB _{P-P}
Attenuation Referenced to IL_{MAX}						
10 to 70 MHz		3	45	50		dB
70 to 115 MHz		3	25	40		
166.5 to 200 MHz		3	25	40		
200 to 400 MHz		3	45	50		
Absolute Group Delay in Passband		1		400	450	ns
Passband Group Delay Ripple, Matching Network A or B, 129 to 151 MHz		1		20	50	ns _{P-P}
Input Impedance, Unbalanced Matching Network		1		50		ohm
Input Impedance, Balanced Matching Network		1		200		ohm
Input Return Loss through any Matching Network		1	3	8		dB
Output Impedance, Unbalanced Matching Network		1		50		ohm
Output Impedance, Balanced Matching Network		1		200		ohm
Output Return Loss through any Matching Network		1	3	10		dB
Operating Temperature Range			-40		+85	°C
Case Style		SM3838-8 3.8 x 3.8 mm Nominal Footprint				
Lid Symbolization, Y=year, WW=week, S=shift		RFM 873 YWWS				






CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:


1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_c .
3. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production"
5. and "ENG" or "E" indicates "engineering prototypes."
6. The design, manufacturing process, and specifications of this filter are subject to change.
7. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
8. US and international patents may apply.
9. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

SF2182D, Single-ended Matching

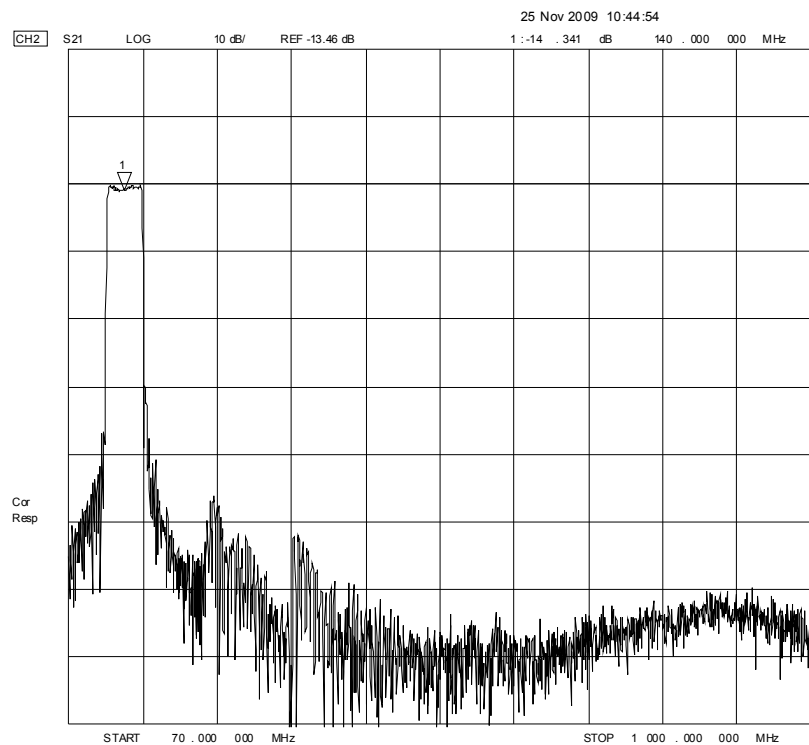
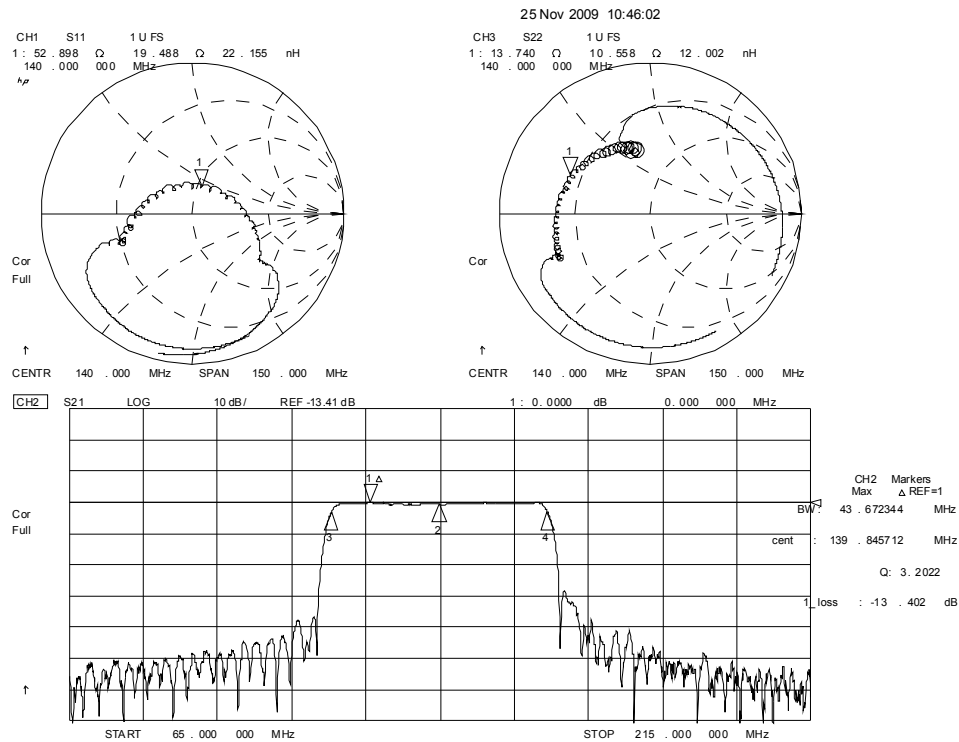



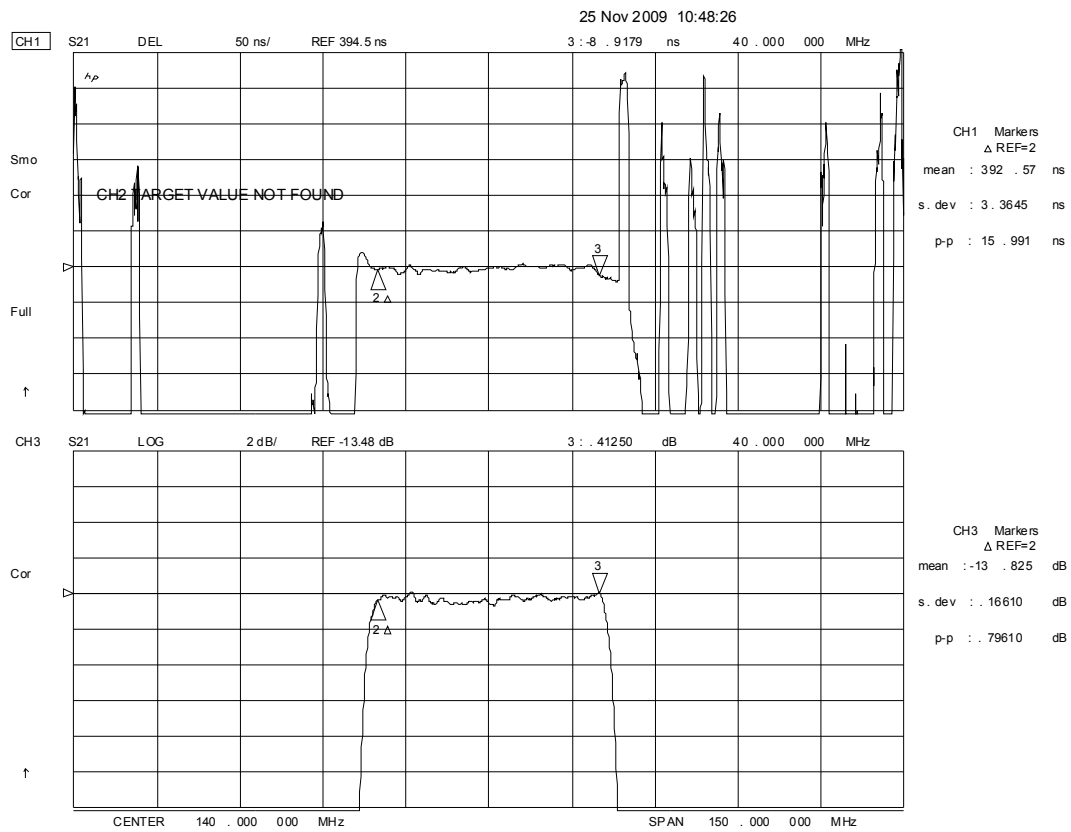


SF2182D Single-ended Test Circuit

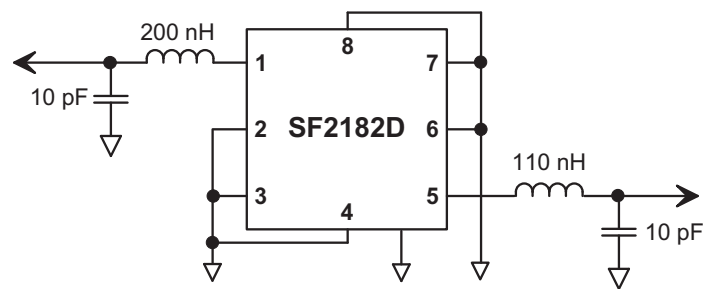


SF2182D, Balanced Input Matching

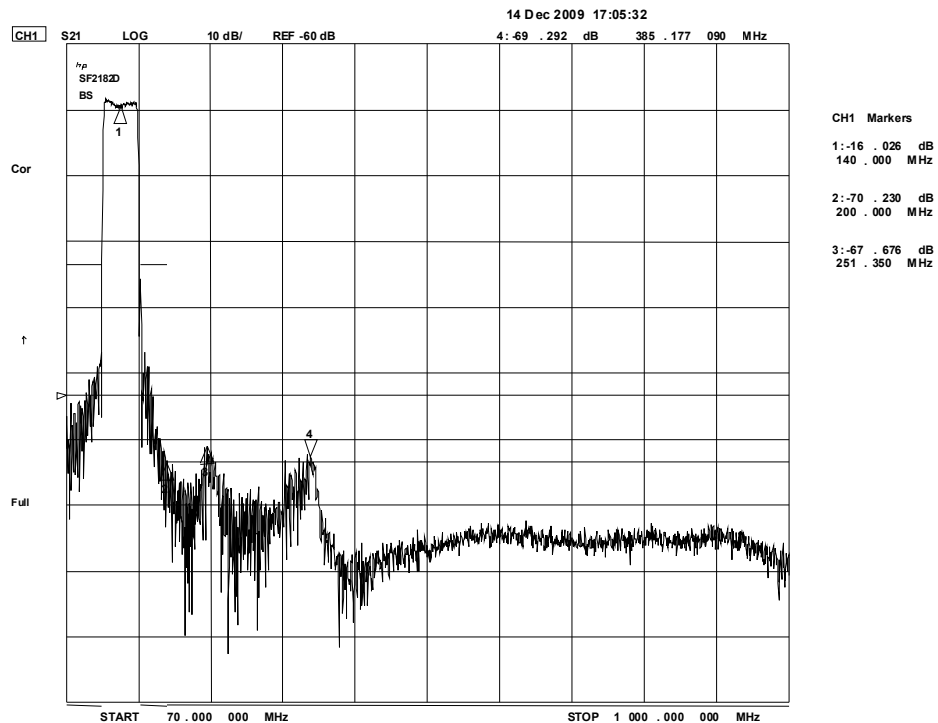
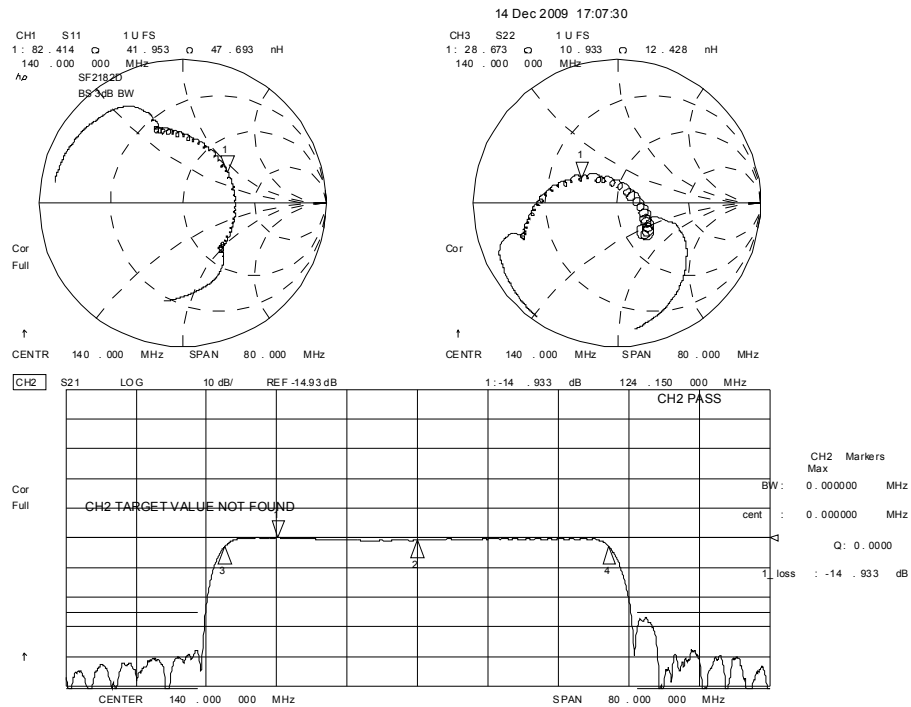




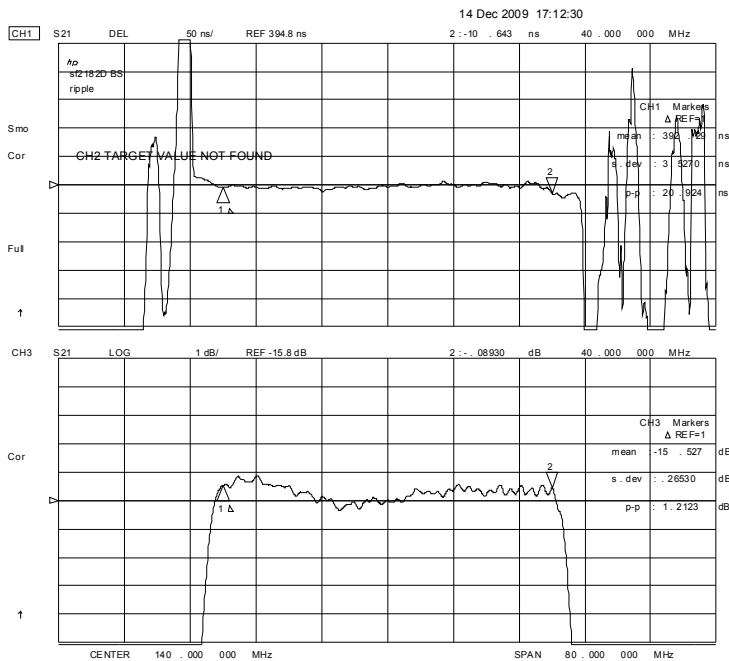
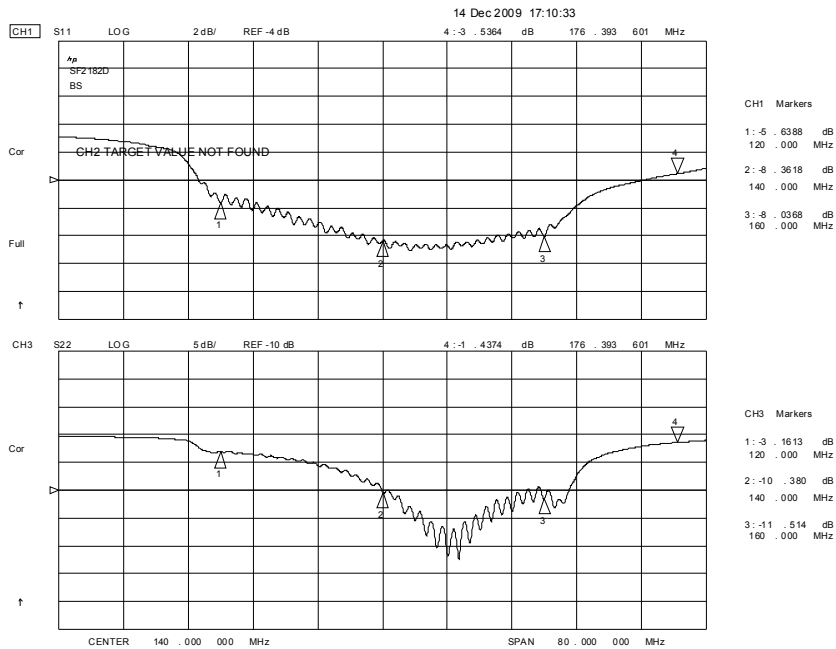


SF2182D, Balanced Input Matching Network

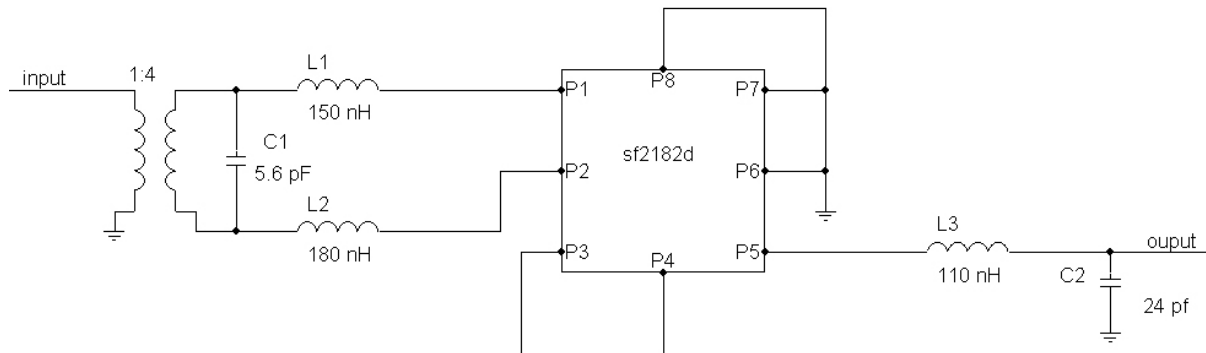


SF2182D, Balanced Output Matching

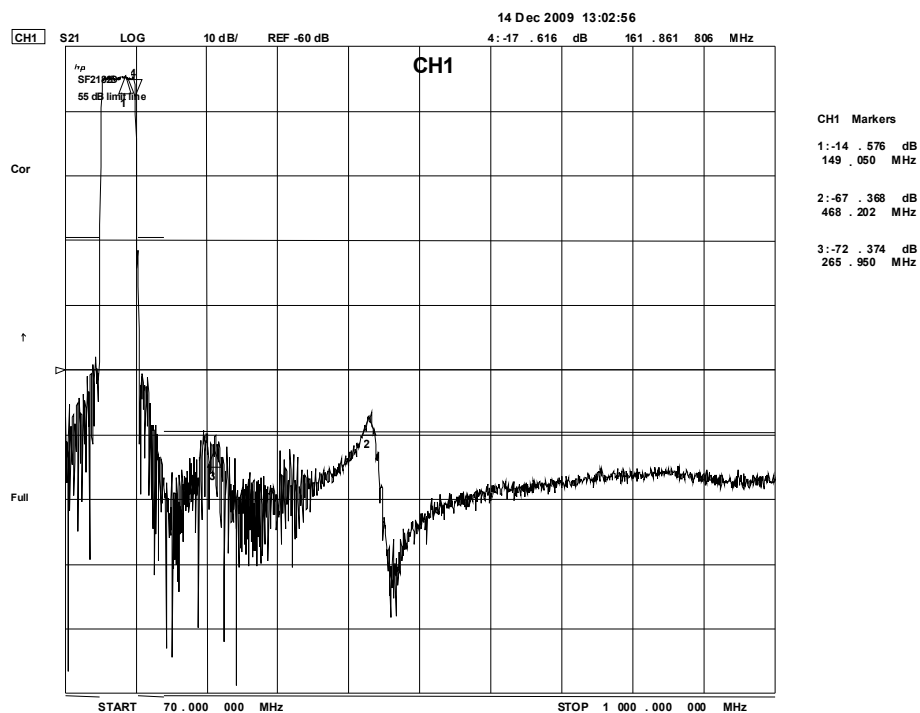
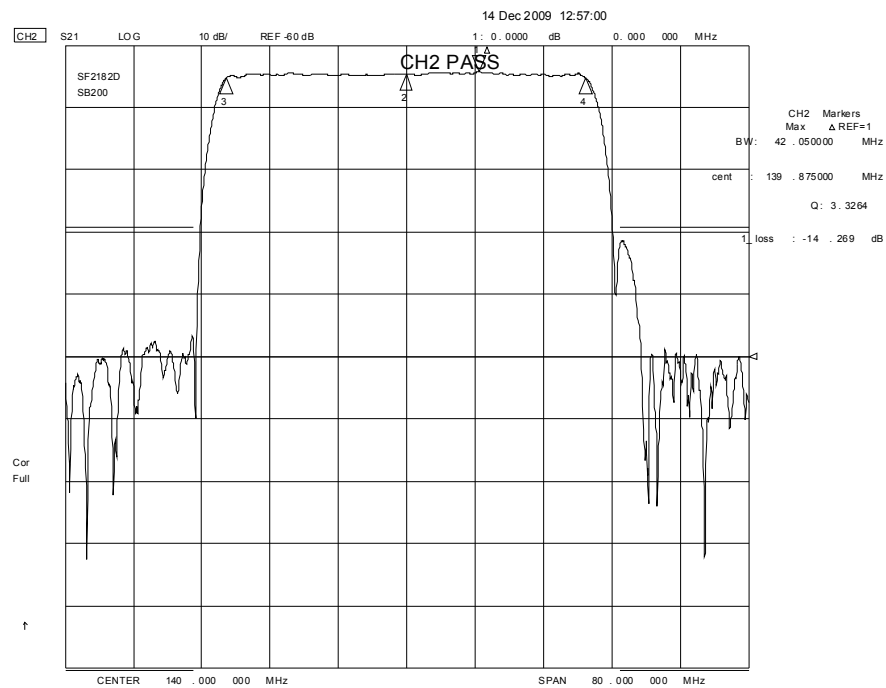


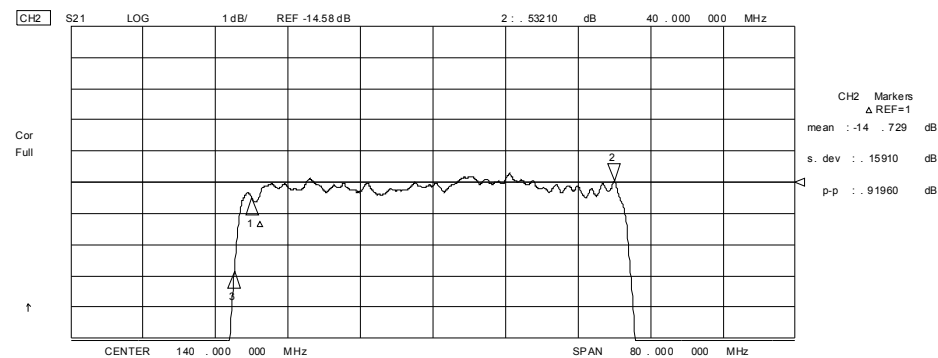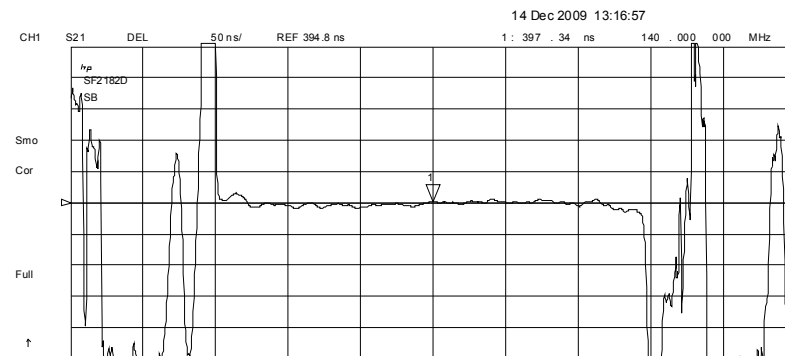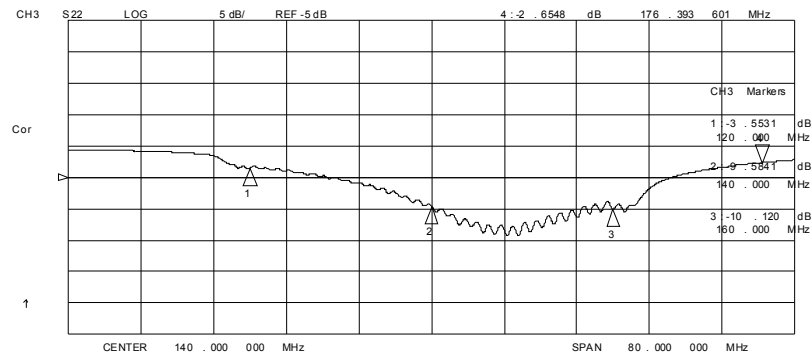
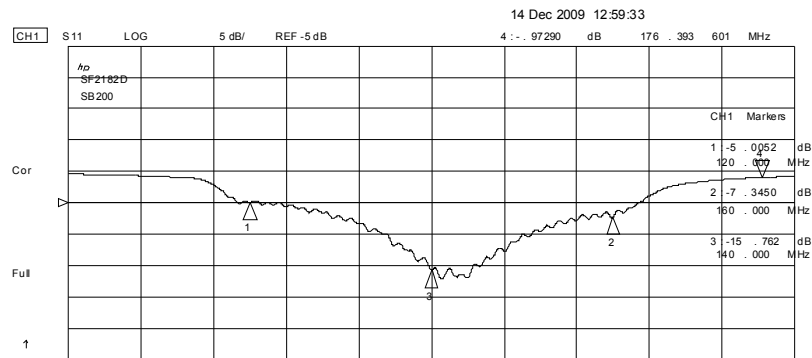


SF2182D, Balanced Output Matching Network

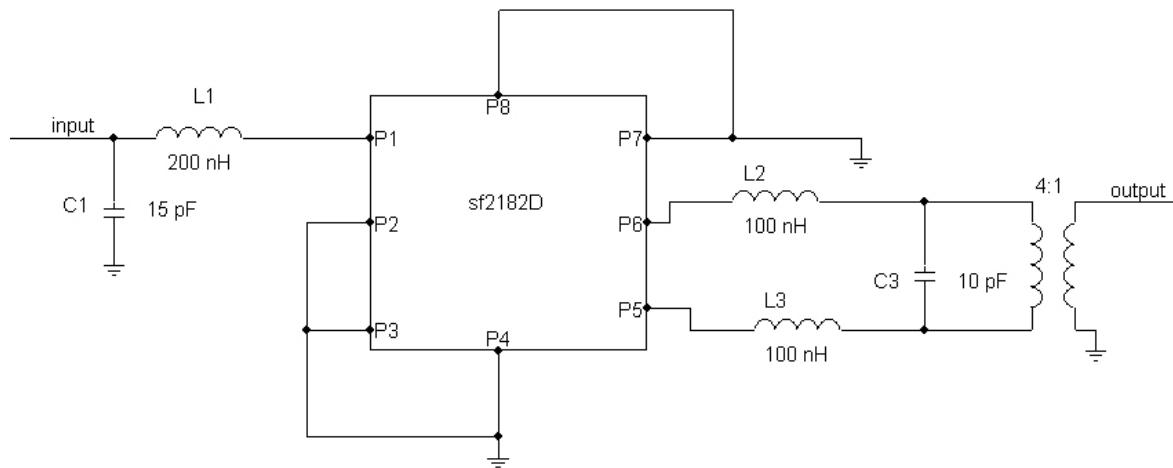


SF2182D, Balanced Input/Output Matching

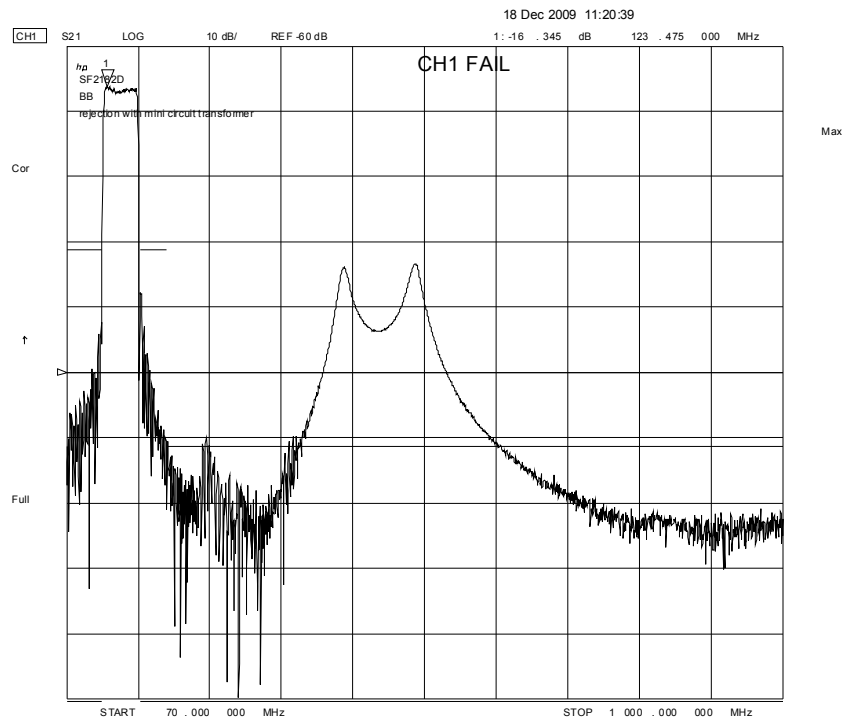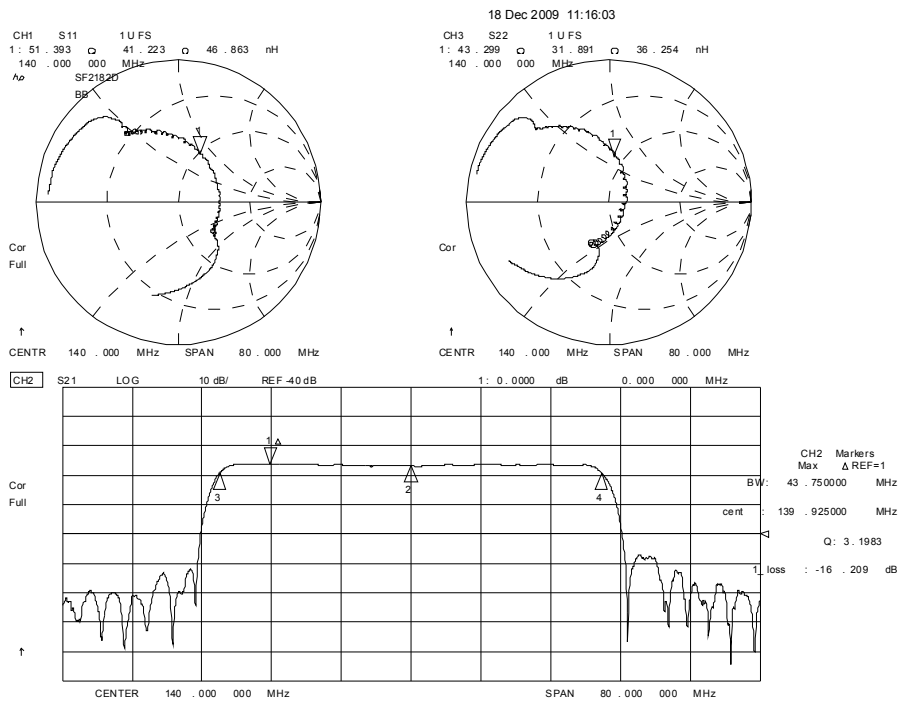

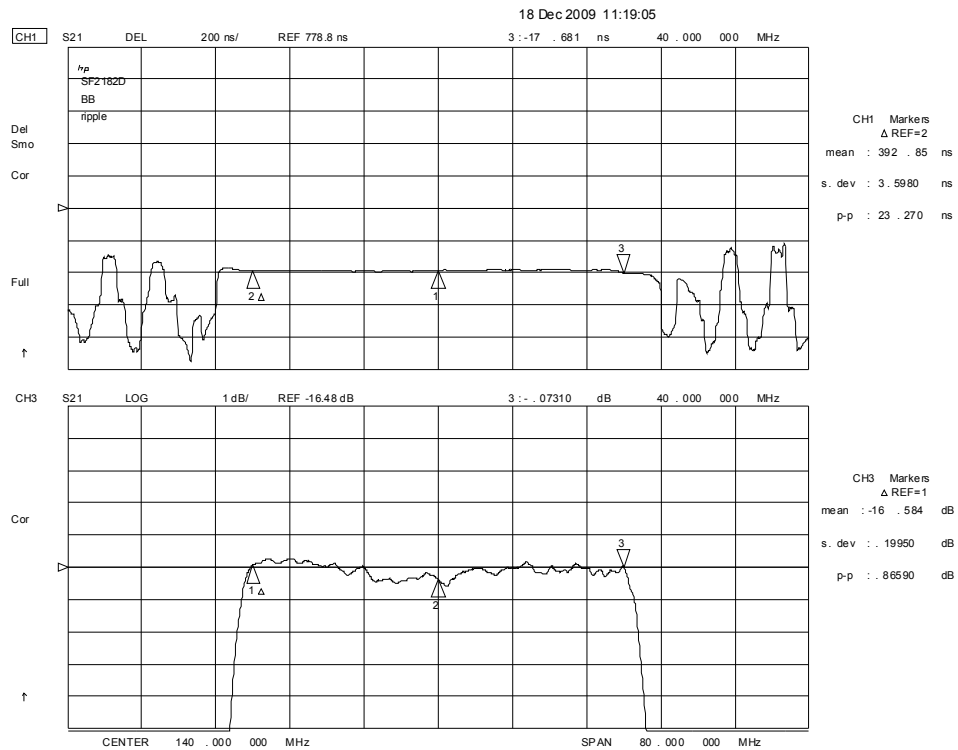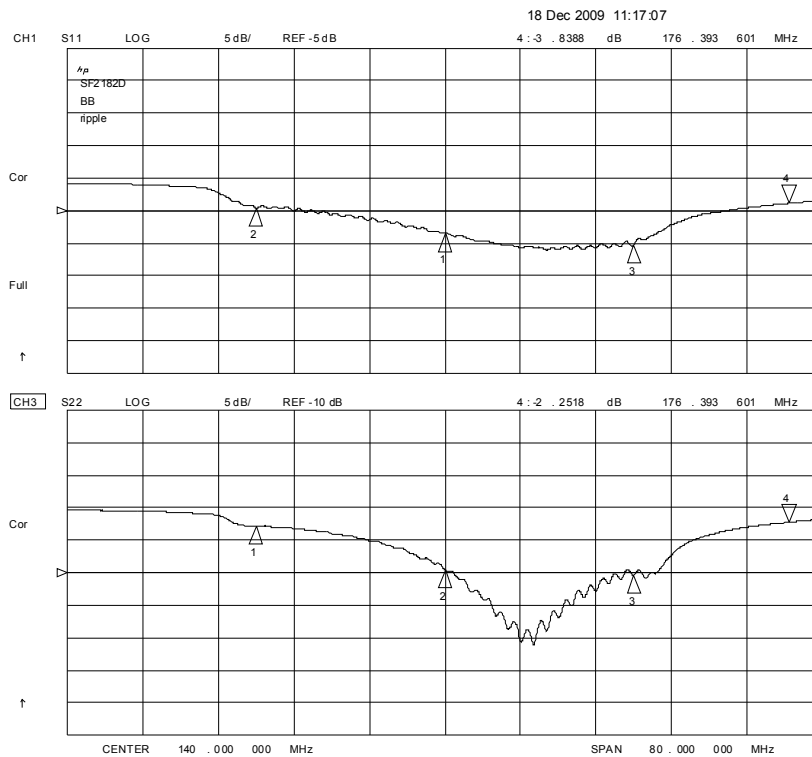


SF2182D, Balanced Input/Output Matching Network

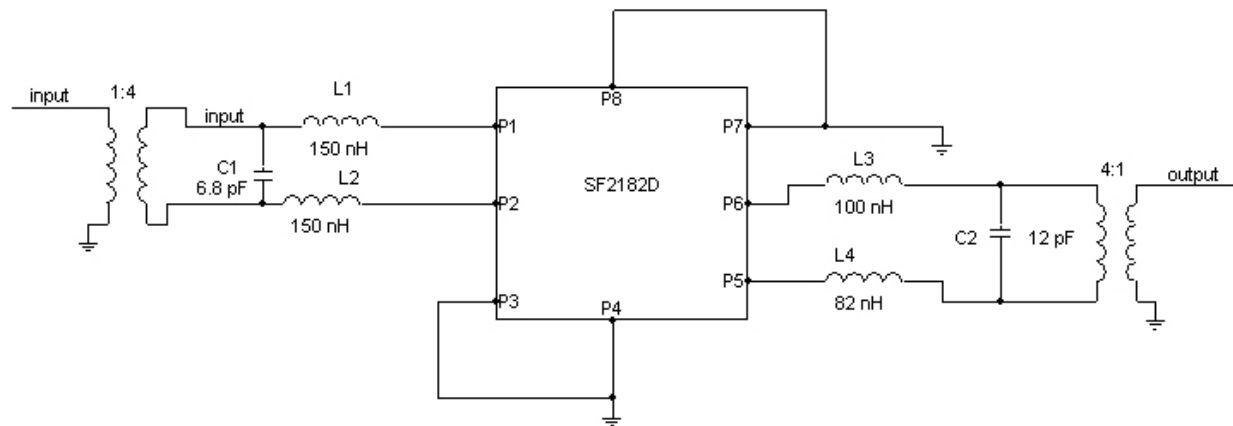


SM3838-8 Case

8-Terminal Ceramic Surface-Mount Case


3.8 X 3.8 mm Nominal Footprint

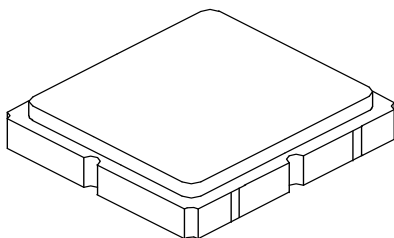


Top View

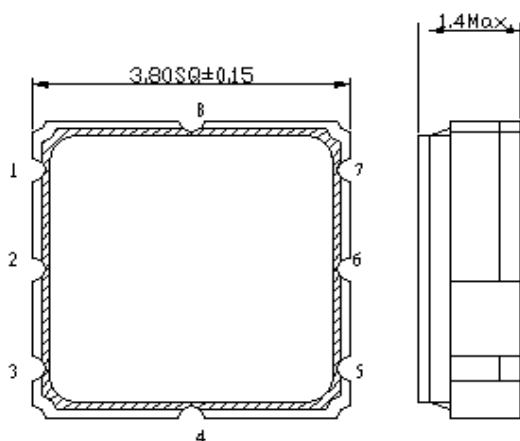

Bottom View

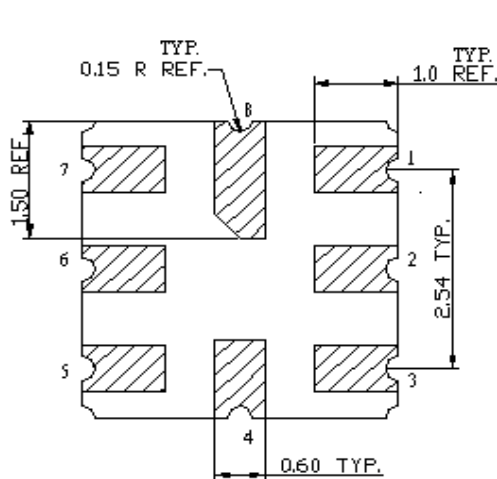

PCB Footprint for 180 Degree Rotation Option

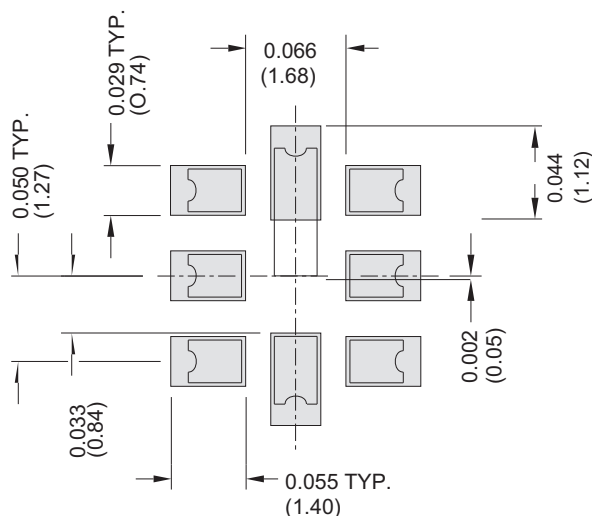

Technical drawing of a circular part, likely a flange or end plate, showing three views: a top view, a side view, and a detail view.

Top View: A large circle with a smaller concentric circle in the center. A crosshair indicates the center. A leader line points from the text "See Detail 'A'" to the center of the inner circle.

Side View: A vertical cross-section showing the thickness of the part. The total thickness is dimensioned as 12.0. The inner hole has a diameter of 100 REF. The outer diameter is dimensioned as "B" REF.

Detail View (Detail A): A cross-section of the central hole. It shows a circular hole with a diameter of 20.2. The hole is surrounded by a ring with a thickness of 2.0. The outer diameter of this ring is 13.0.

“B” Nominal Size		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	1000

Carrier Tape Dimensions	
Ao	4.25 mm
Bo	4.25 mm
Ko	1.30 mm
Pitch	8.0 mm
W	12.0 mm

