

Ordering Information:

A2547HJ-2xXP - ***
1 2

1.Part NO.

2.Material:

(Blank): PBT,UL94V-0(Black)

GWT: PBT,UL94V-0,GWT 750°C(Black)

GWT-NAT: PBT,UL94V-0,GWT 750°C(Natural)

SPECIFICATIONS:

Current Rating: 5A (MAX) AC,DC

Voltage Rating: 250V AC,DC


Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute


Material: PBT,UL94V-0(Black)



Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	5.08	2x18P	43.18	45.99
2x3P	5.08	7.89	2x19P	45.72	48.53
2x4P	7.62	10.43	2x20P	48.26	51.07
2x5P	10.16	12.97	2x21P	50.80	53.61
2x6P	12.70	15.51	2x22P	53.34	56.15
2x7P	15.24	18.05	2x23P	55.88	58.69
2x8P	17.78	20.59	2x24P	58.42	61.23
2x9P	20.32	23.13	2x25P	60.96	63.77
2x10P	22.86	25.67	2x26P	63.50	66.31
2x11P	25.40	28.21	2x27P	66.04	68.85
2x12P	27.94	30.75	2x28P	68.58	71.39
2x13P	30.48	33.29	2x29P	71.12	73.93
2x14P	33.02	35.83	2x30P	73.66	76.47
2x15P	35.56	38.37	2x31P	76.20	79.01
2x16P	38.10	40.91	2x32P	78.74	81.55
2x17P	40.64	43.45			

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE	
Unit	Scale	Sheet	2.54mm PITCH	
mm	2:1	1 of 1		
DRAWN	CHK'D	APPR	DUAL ROW HOUSING	
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			A2547HJ-2xXP	A4

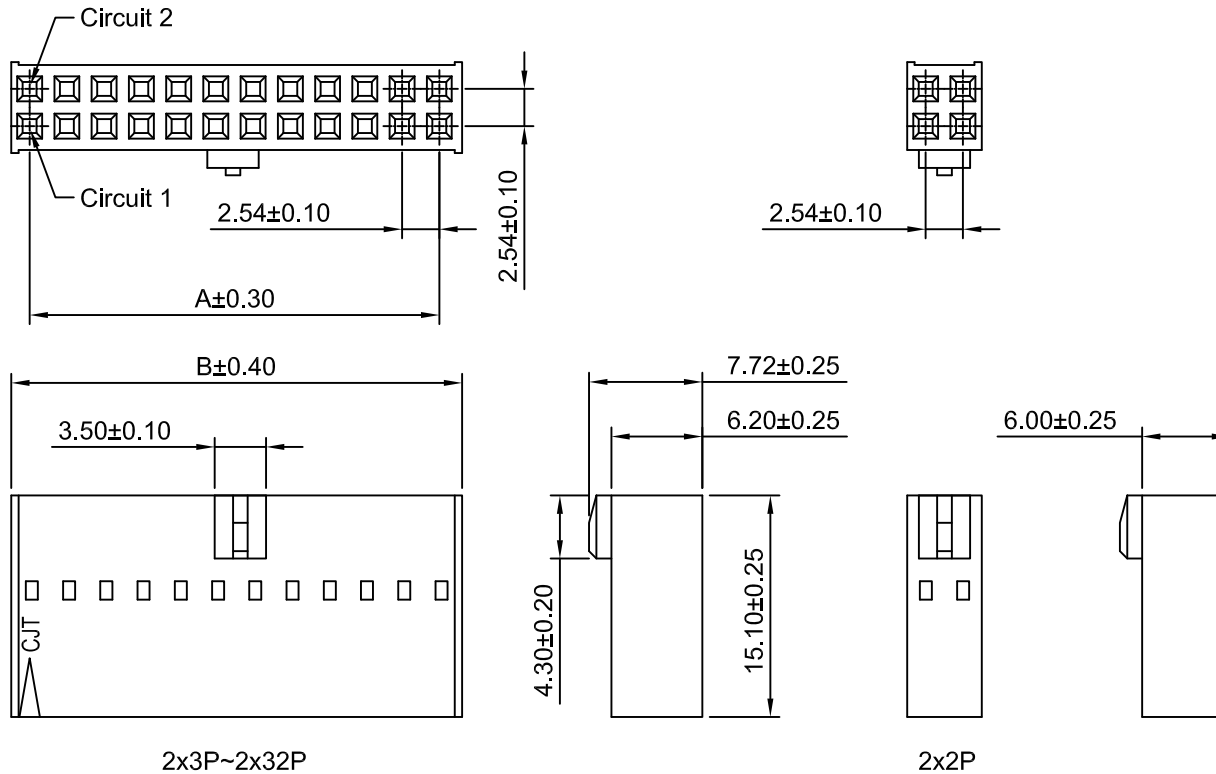

2x3P~2x32P

2x2P

A4	CHANGE THE DRAWING	2023.06.14
A3	CHANGE THE DRAWING	2022.06.13
A2	ADD THE INFORMATION	2020.02.25
A1	CHANGE THE DRAWING	2017.04.18
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE