

LTCC 高通滤波器 (High Pass Filter)

HT-HFCN-4400+


Features

- Low cost
- Small size
- 7 sections
- Temperature stable
- LTCC construction
- Excellent power handling, 7W
- Hermetically sealed

Applications

- Sub-harmonic rejection
- Transmitters/receivers
- Lab use

Outline Drawing

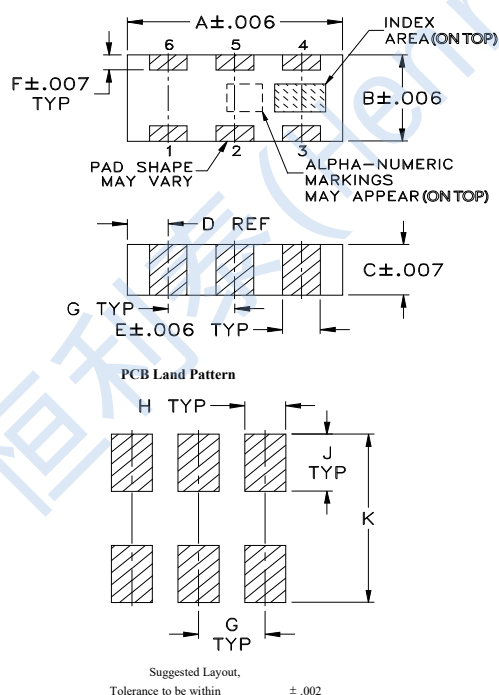


Outline Dimensions

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28

G	H	J	K	wt
.039	.024	.042	.123	grams
0.99	0.61	1.07	3.12	.020

Functional Schematic



50 Ω

5000MHz to 10100MHz


Electrical Specifications(1,2) at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Rejection Loss	3600	—	30	—	dB
Stop Band	3500	20	—	—	dB
Freq. Cut-Off	4400	—	3.0	—	dB
VSWR	3500-3600	—	20	—	:1
Insertion Loss	5000-10100	—	—	2.0	dB
Pass Band	5000-9900	—	—	1.5	dB
VSWR	4600-10100	—	1.5	—	:1

Pad Connections

RF IN	1
RF OUT	3
GROUND	2,4,5,6

Suggested PCB Layout


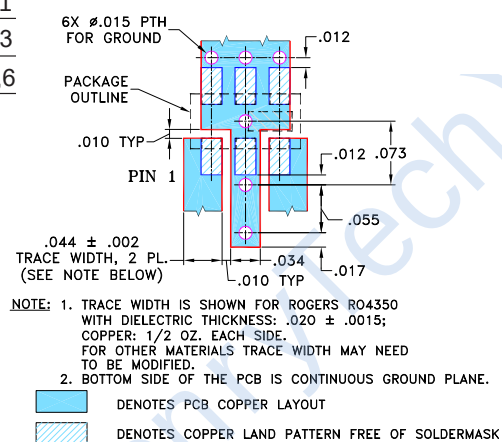


Maximum Ratings

Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input*	7W max at 25°C

*Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

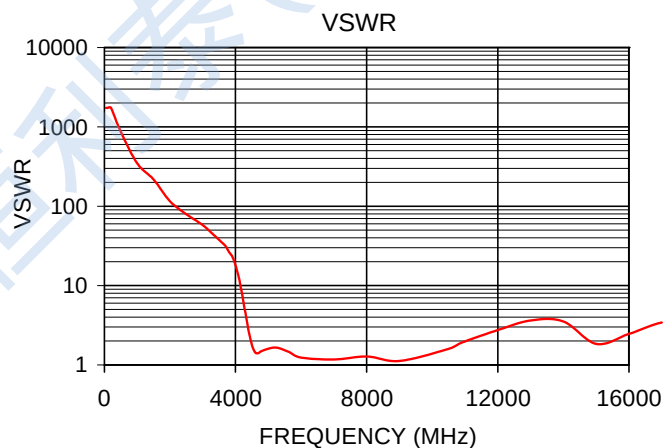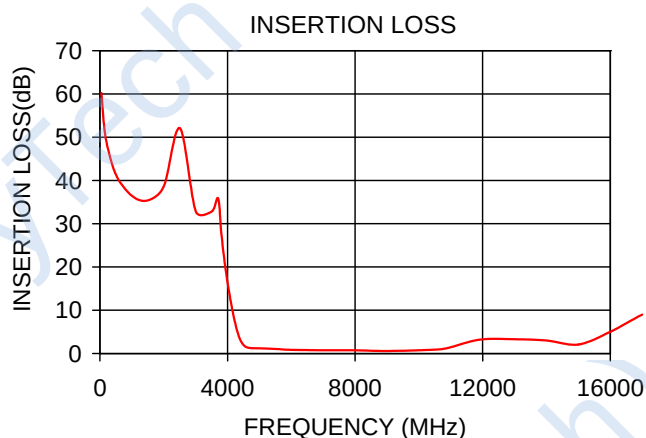

Tel: +86-28-85589664

E-mail: mr_li@henglitaitech.com

Web: www.hltchips.com

Room 1401, 14th Floor, Building 5, Huaxi Science and Technology Innovation Center, No. 50, Shuixi Road, Jinniu District, Chengdu City