

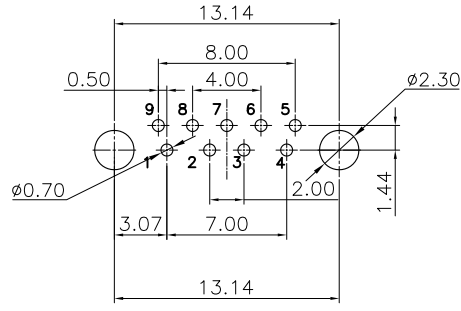
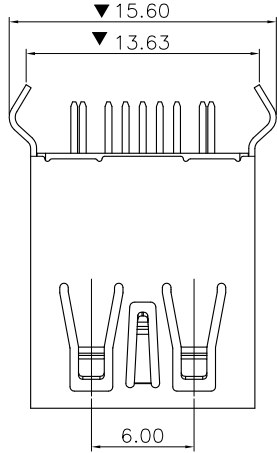
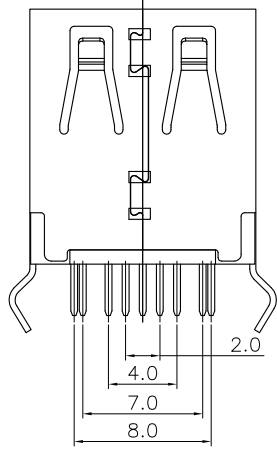



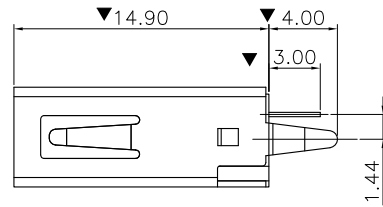

TOLERANCE: ± 0.05 ,
RECOMMENDED PCB LAYOUT
(TOP VIEW)



NOTES:

1.MATERIAL:

- 1.1 HOUSING: HIGH TEMPERATURE THERAL PLASTIC.
- 1.2 SPRING CONTACT: COPPER ALLOY.
- 1.3 FLAT CONTACT: COPPER ALLOY
- 1.4 SHELL : COPPER ALLOY.
- 1.5 COVER: HIGH TEMPERATURE THERAL PLASTIC.

2.FINISH:

- 2.1 CONTACT: (SEE P/N.), [50 μ] MIN. NICKEL UNDERPLATING OVER ALL.
- 2.2 SHELL: [50 μ] MIN. SOLDERABILITY NICKEL UNDERPLATING OVER ALL.

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SLGNAL NAME	V BUS	D-	D+	GND
REMARK	USB 2.0 CONTACT PINS			

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SLGNAL NAME	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X.	± 0.25	X.	$\pm 5.^\circ$
.X	± 0.20	.X	$\pm 2.^\circ$
.XX	± 0.15	.XX	$\pm 1.^\circ$
.XXX	± 0.10	.XXX	$\pm 0.5^\circ$

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	916-162A2058Y20200
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF3.0 180度15.0弯脚无边铜壳LCP蓝胶
日期 DATE	2021-04-14	核准 APPD	黄国荣	角法 VIEW	
				版本 VER	AO