

General Description

The Sanrise SRC70R900 is a high voltage power MOSFET, fabricated using advanced super junction technology. The resulting device has extremely low on resistance, low gate charge and fast switching time, making it especially suitable for applications which require superior power density and outstanding efficiency.

The SRC70R900 break down voltage is 700V and it has a high rugged avalanche characteristic.

The SRC70R900 is available in TO-220F, TO-252 packages.

Features

- Ultra Low $R_{DS(ON)} = 900m\Omega @ V_{GS} = 10V$.
- Ultra Low Gate Charge, $Q_g = 6.2nC$ typ.
- Fast switching capability
- Robust design with better EAS performance
- Non-automotive Qualified
- Ultra-fast body diode

Application

- LED lighting
- Quick Charger

Symbol


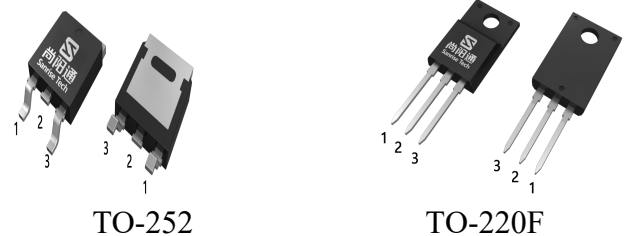


Figure 1 Symbol of SRC70R900

Package Type



TO-252

TO-220F

Figure 2 Package Types of SRC70R900

Ordering Information

SRC70R900□□-□		
Circuit Type	_____	E: Lead Free
Package	_____	G: Green
TF: TO-220F		Blank: Tube
D: TO-252		TR: Tape & Reel

Package	Part Number	Marking ID	Packing Type
TO-220F	SRC70R900TF-G	SRC70R900TFG	Tube
TO-252	SRC70R900DTR-G	SRC70R900DGT	Tape & Reel

Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	700	V
Gate-Source Voltage (static)		V_{GSS}	±20	V
Gate-Source Voltage (dynamic), AC ($f > 1$ Hz)		V_{GSS}	±30	V
Power Dissipation($T_C=25^{\circ}\text{C}$)	TO-220F	P_{tot}	20	W
	TO-252		29	
Continuous Drain Current	$T_C=25^{\circ}\text{C}$	I_D	3.7	A
	$T_C=100^{\circ}\text{C}$		2.4	
	$T_C=125^{\circ}\text{C}$		1.7	
Pulsed Drain Current (Note 2)		I_{DM}	11.1	A
Avalanche Energy, Single Pulse (Note 3)		E_{AS}	75	mJ
Avalanche Energy, Repetitive (Note 2)		E_{AR}	0.1	mJ
Avalanche Current, Repetitive (Note 2)		I_{AR}	0.2	A
Continuous Diode Forward Current		I_S	3.7	A
Diode Pulse Current		$I_{S,PULSE}$	11.1	A
MOSFET dv/dt Ruggedness, $V_{DS} \leq 480\text{V}$		dv/dt	15	V/ns
Reverse Diode dv/dt , $V_{DS} \leq 480\text{V}$, $I_{SD} \leq I_D$		dv/dt	50	V/ns
Operating Junction Temperature		T_J	150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55 to 150	$^{\circ}\text{C}$
Lead Temperature (Soldering, 10 sec)		T_{LEAD}	260	$^{\circ}\text{C}$

Note:

1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Repetitive Rating: Pulse width limited by maximum junction temperature
3. $I_{AS} = 3.0\text{A}$, $V_{DD} = 60\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^{\circ}\text{C}$

Thermal Resistance

Parameter		Symbol	Min	Typ	Max	Unit
Thermal resistance, Junction-to-Case	TO-220F	R_{thJC}			6.0	$^{\circ}\text{C}/\text{W}$
	TO-252				4.2	
Thermal resistance, Junction-to-Ambient	TO-220F	R_{thJA}			80	$^{\circ}\text{C}/\text{W}$
	TO-252				62	

Electrical Characteristics

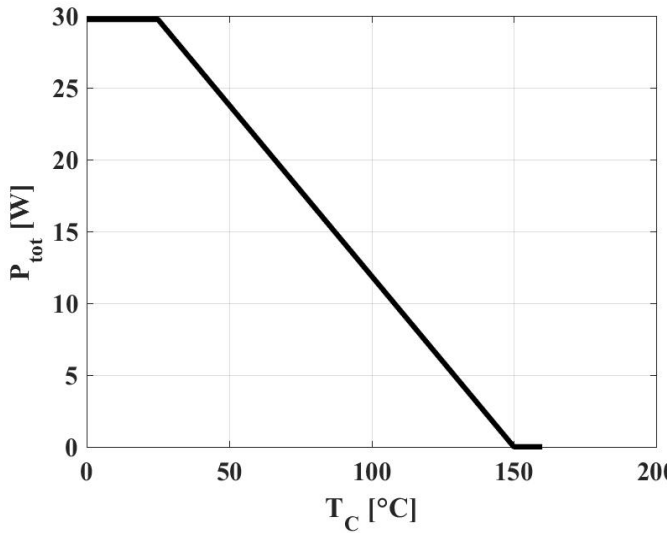
$T_J = 25^\circ\text{C}$, unless otherwise specified.

Parameter		Symbol	Test Conditions	Min	Typ	Max	Unit
Statistic Characteristics							
Drain-Source Breakdown Voltage		BV _{DSS}	V _{GS} =0V, I _D =250uA	700			V
Zero Gate Voltage Drain Current		I _{DSS}	V _{DS} =700V, V _{GS} =0V			1	uA
Gate-Body Leakage Current	Forward	I _{GSSF}	V _{GS} =20V, V _{DS} =0V			100	nA
	Reverse	I _{GSSR}	V _{GS} =-20V, V _{DS} =0V			-100	
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =0.8mA	2.5	3.5	4.5	V
Static Drain-Source On-Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =1.5A		0.72	0.9	Ω
Gate Resistance		R _G	f=1MHz, Open Drain		6.0		Ω
Dynamic Characteristics							
Input Capacitance		C _{ISS}	V _{DS} =50V, V _{GS} =0V, f=1MHz		296		pF
Output Capacitance		C _{OSS}			15		pF
Reverse Transfer Capacitance		C _{RSS}			0.4		
Effective output capacitance, energy related ^{NOTE5}		C _{O(er)}	V _{GS} =0V, V _{DS} =0...400V		8.6		pF
Effective output capacitance, time related ^{NOTE6}		C _{O(tr)}			56.4		
Turn-on Delay Time		t _{d(on)}	V _{DD} =400V, I _D =16A R _G =5.3Ω, V _{GS} =10V		6		ns
Rise Time		t _r			5		
Turn-off Delay Time		t _{d(off)}			40		
Fall Time		t _f			13		
Gate Charge Characteristics							
Gate to Source Charge		Q _{gs}	V _{DD} =480V, I _D =1.5A V _{GS} =0 to 10V		1.6		nC
Gate to Drain Charge		Q _{gd}			2.2		
Gate Charge Total		Q _g			6.2		
Gate Plateau Voltage		V _{plateau}			5.2		V
Reverse Diode Characteristics							
Drain-Source Diode Forward Voltage		V _{SD}	V _{GS} =0V, I _{SD} =1.5A		0.82	1.1	V
Reverse Recovery Time		t _{rr}	V _R =100V, I _F =1.5A dI _F /dt=100A/us		110		ns
Reverse Recovery Charge		Q _{rr}			0.45		uC
Peak Reverse Recovery Current		I _{rrm}			8.2		A

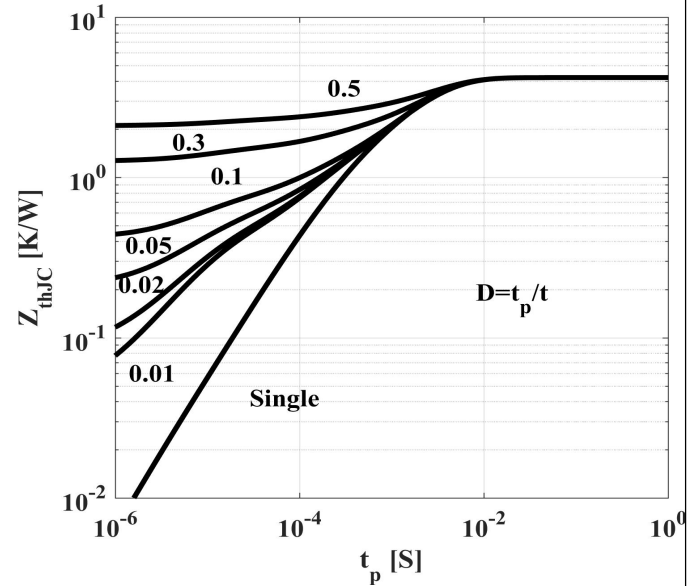
Note:

5. $C_{O(er)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 400V

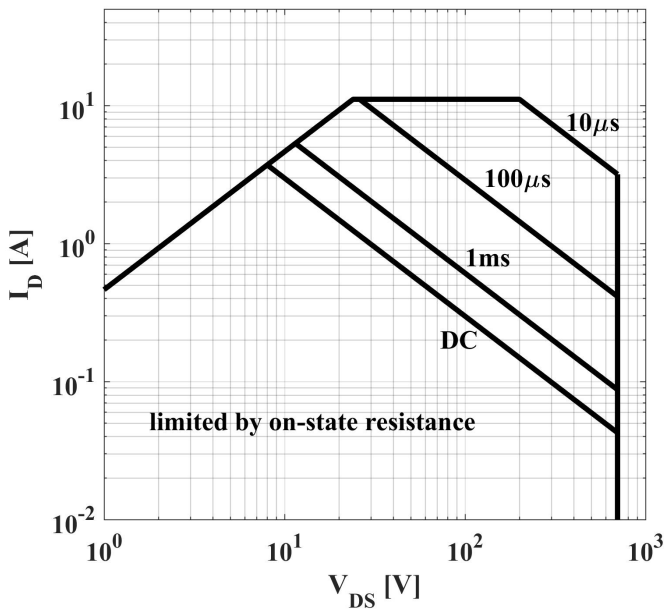
6. $C_{O(tr)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 400 V

Typical Performance Characteristics
Figure 3: Power Dissipation


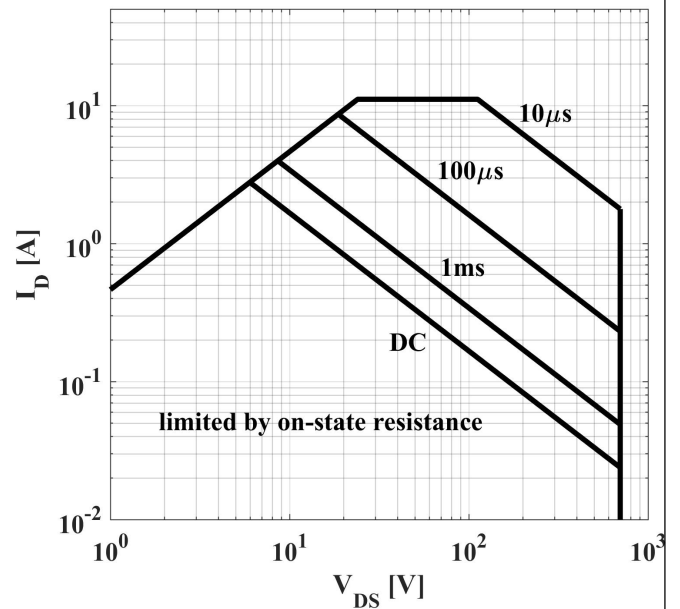
$$P_{tot} = f(T_c)$$

Figure 4: Max. Transient Thermal Impedance


$$Z_{thJC} = f(t_p); \text{ parameter: } D = t_p / T$$

Figure 5: Safe Operating Area


$$I_D = f(V_{DS}); T_c = 25^\circ\text{C}; V_{GS} > 7\text{V}; \text{ parameter } t_p$$

Figure 6: Safe Operating Area


$$I_D = f(V_{DS}); T_c = 80^\circ\text{C}; V_{GS} > 7\text{V}; \text{ parameter } t_p$$

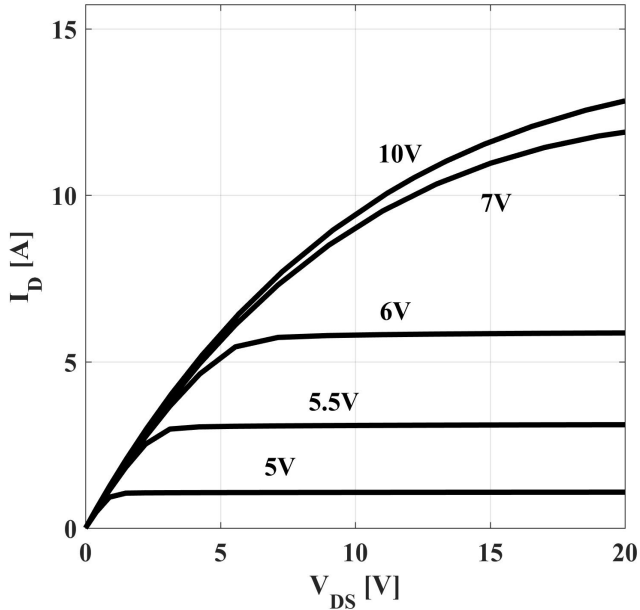
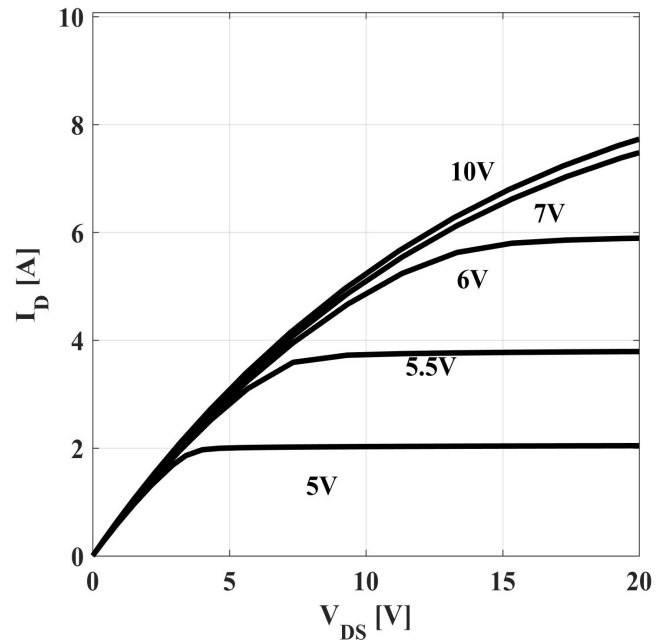
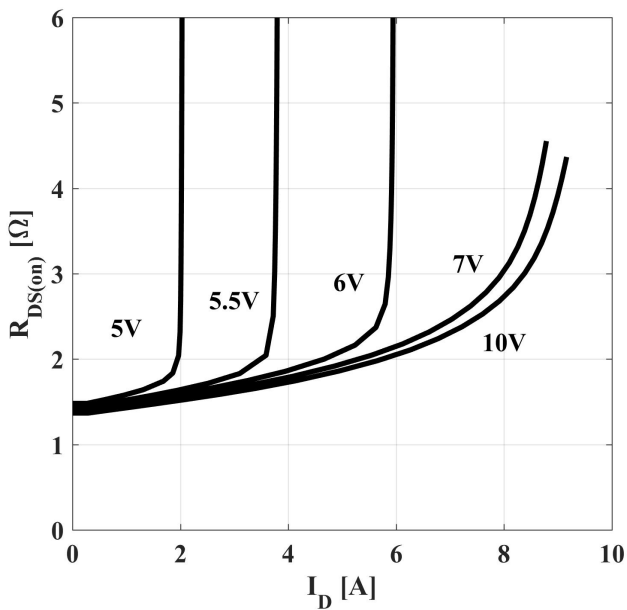
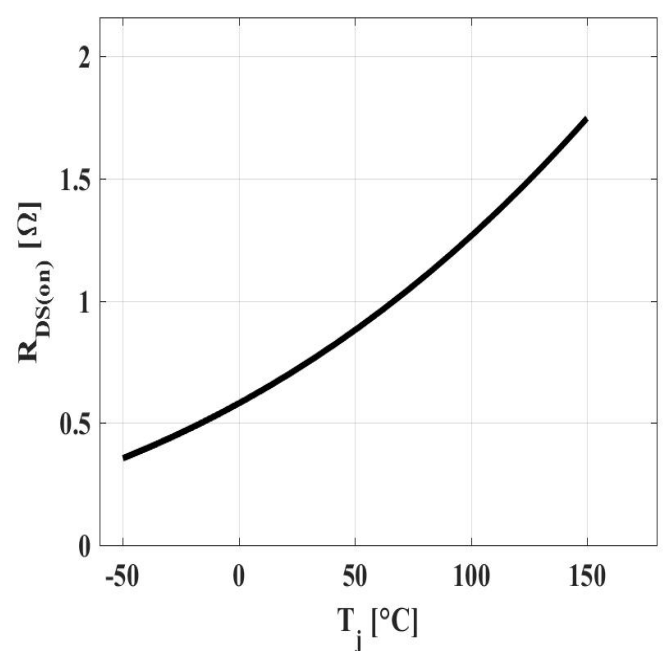
Figure 7: Typ. Output Characteristics

 $I_D = f(V_{DS}); T_j = 25^\circ\text{C}; \text{parameter: } V_{GS}$
Figure 8: Typ. Output Characteristics

 $I_D = f(V_{DS}); T_j = 125^\circ\text{C}; \text{parameter: } V_{GS}$
Figure 9: Typ. Drain-Source On-State Resistance

 $R_{DS(ON)} = f(I_D); T_j = 125^\circ\text{C}; \text{parameter: } V_{GS}$
Figure 10: Typ. Drain-Source On-State Resistance

 $R_{DS(ON)} = f(T_j); I_D = 1.5\text{A}; V_{GS} = 10\text{V}$

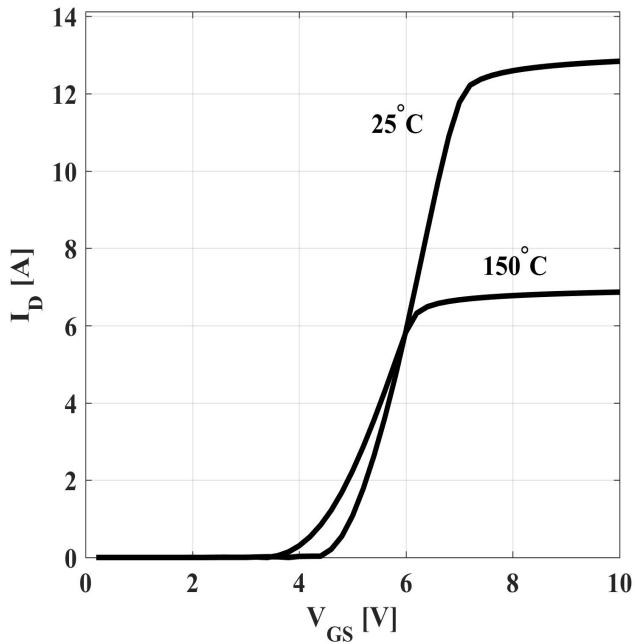
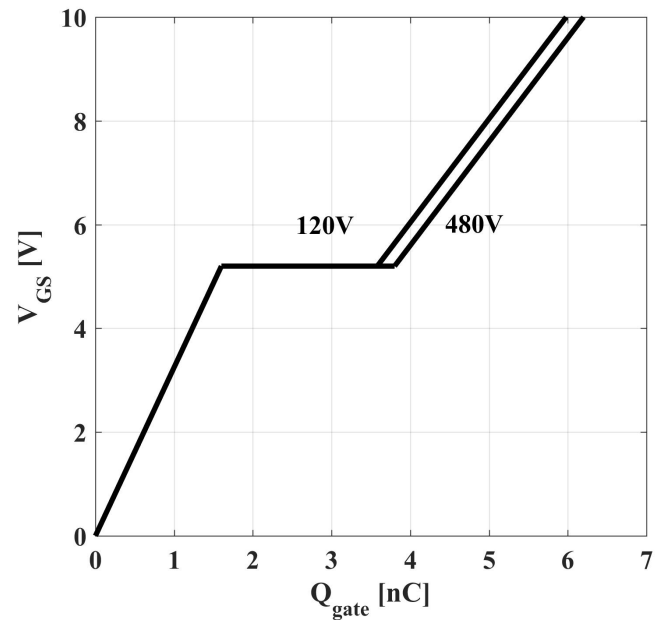
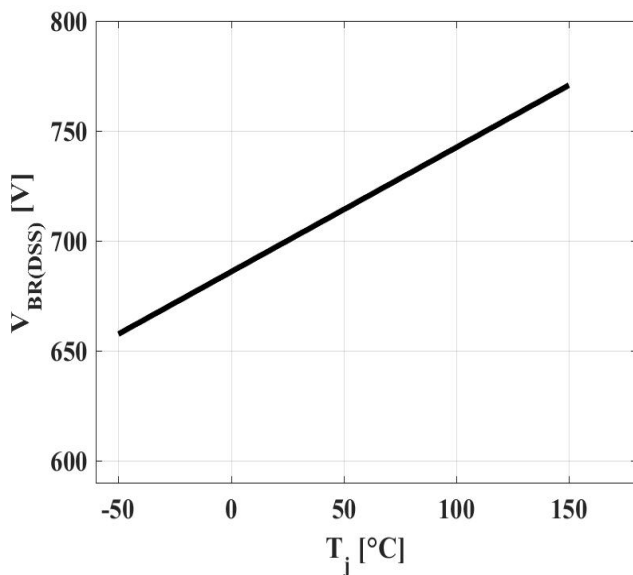
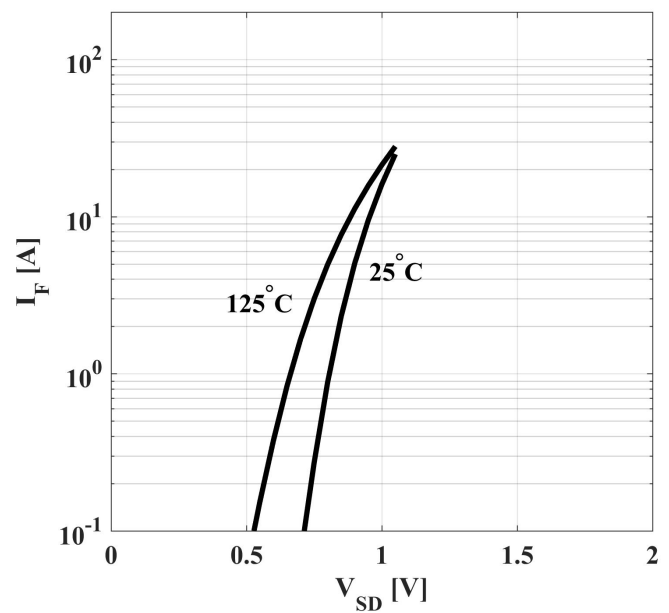
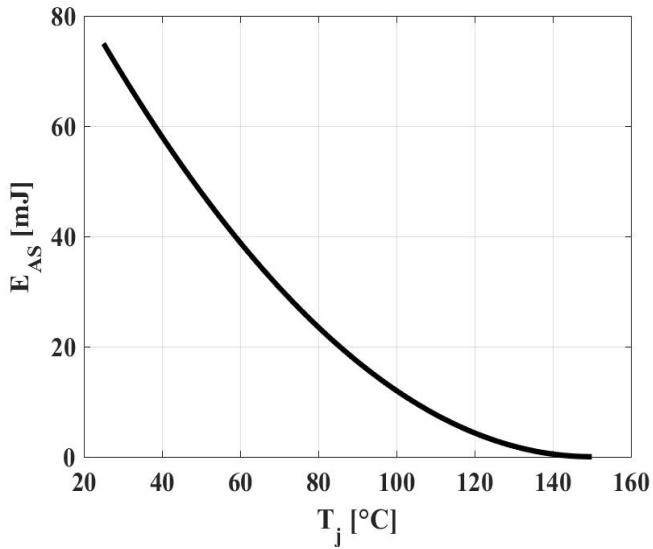
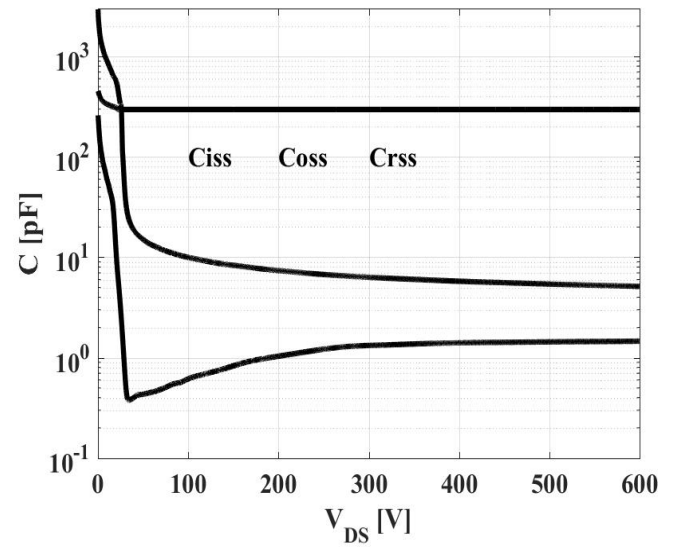
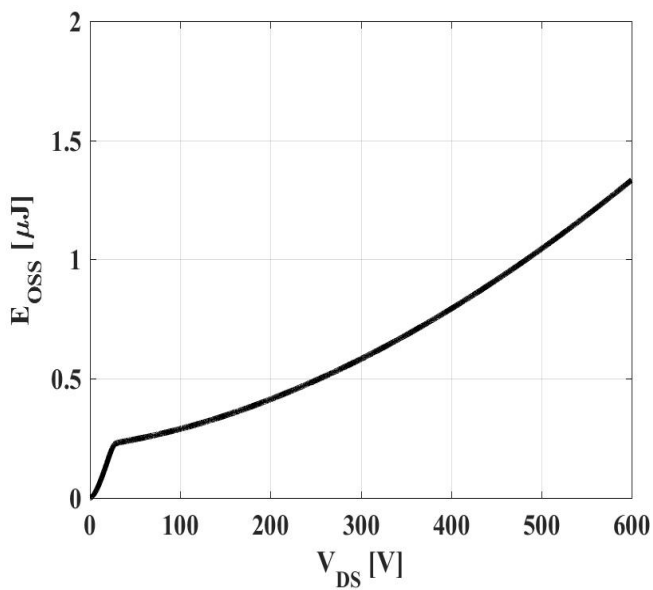
Figure 11: Typ. Transfer Characteristics

 $I_D = f(V_{GS}); V_{DS} = 20V$
Figure 12: Typ. Gate Charge

 $V_{GS} = f(Q_{gate}), I_D = 1.5A \text{ pulsed}$
Figure 13: Drain-Source Breakdown Voltage

 $V_{BR(DSS)} = f(T_j); I_D = 1mA$
Figure 14: Forward Characteristics of Reverse Diode

 $I_F = f(V_{SD}); \text{parameter: } T_j$

Figure 15: Avalanche Energy


$$E_{AS}=f(T_j); I_D=0.2A; V_{DD}=60V$$

Figure 16: Typ. Capacitances


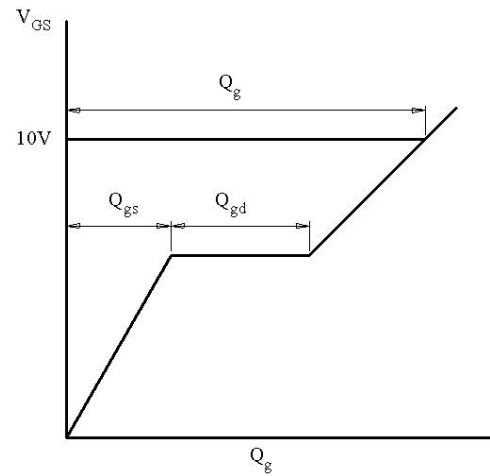
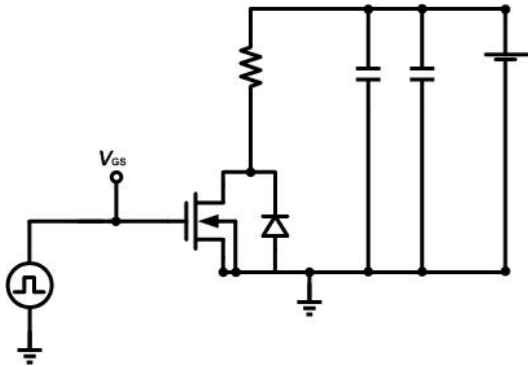
$$C=f(V_{DS}); V_{GS}=0; f=1MHz$$

Figure 17: Coss Stored Energy


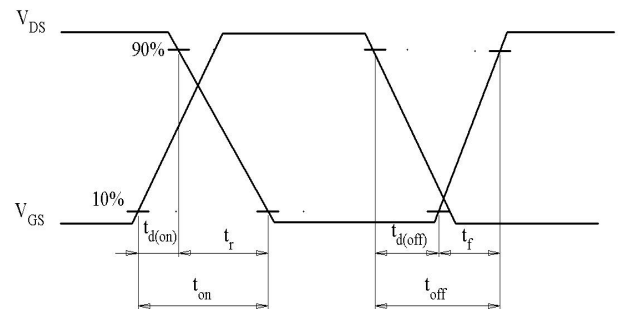
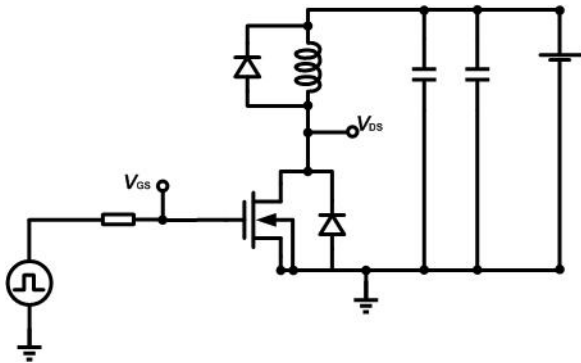
$$E_{OSS}=f(V_{DS})$$

Test Circuits

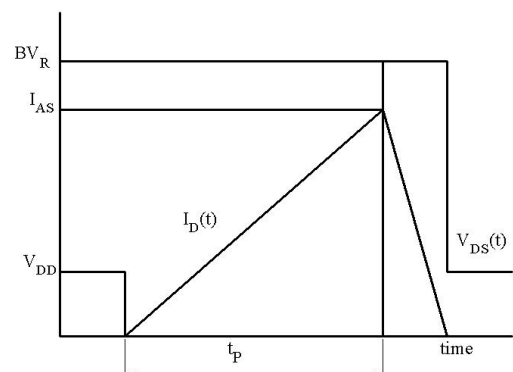
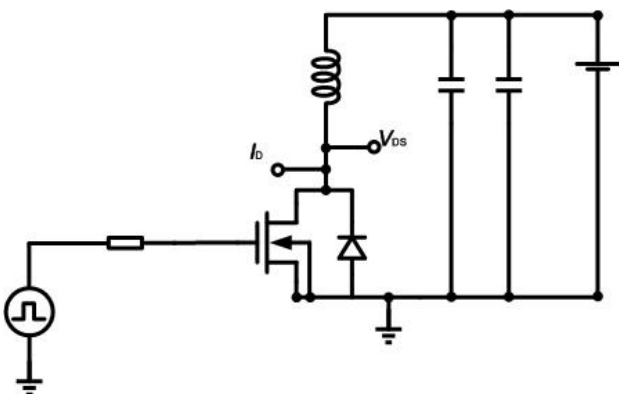
1. Gate Charge Test Circuit & Waveform



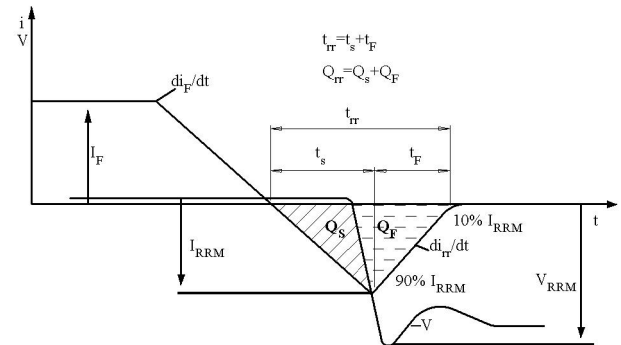
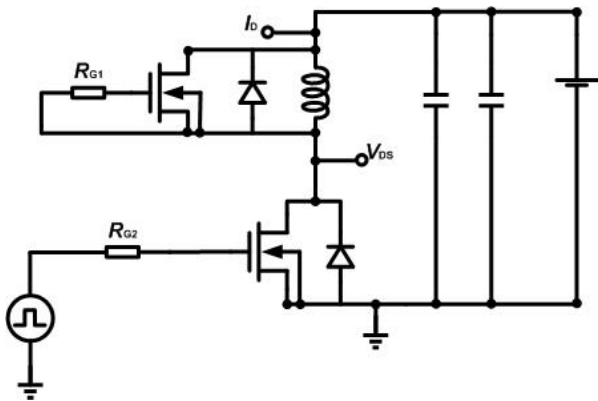
2. Switch Time Test Circuit

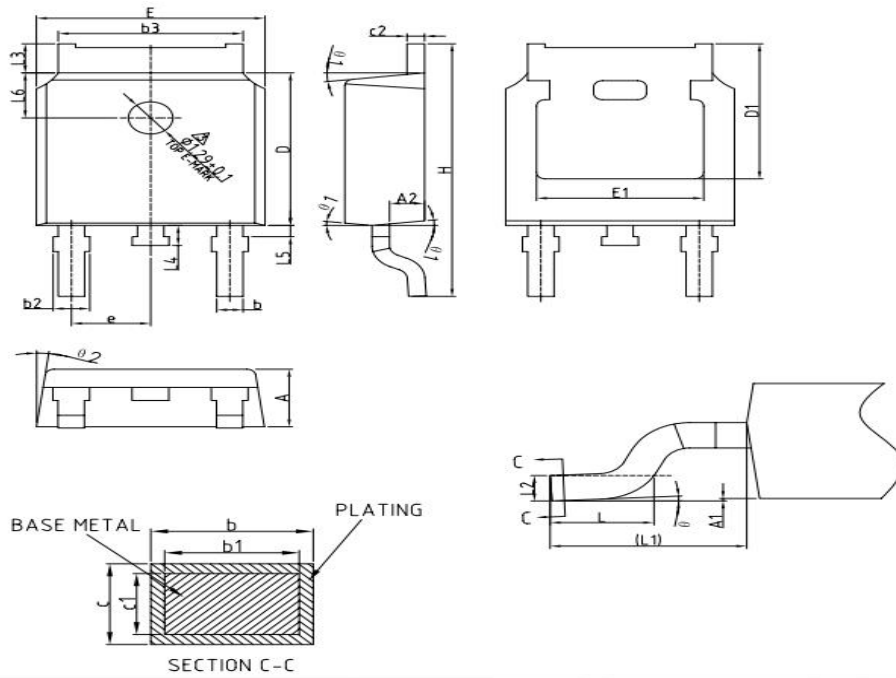


3. Unclaimed Inductive Switching Test Circuit & Waveforms

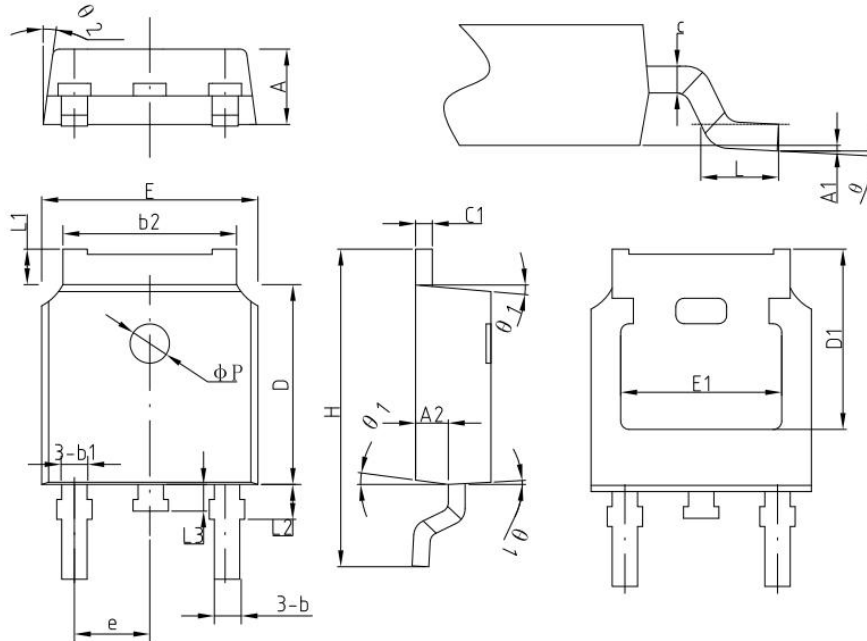


4. Test Circuit and Waveform for Diode Characteristics

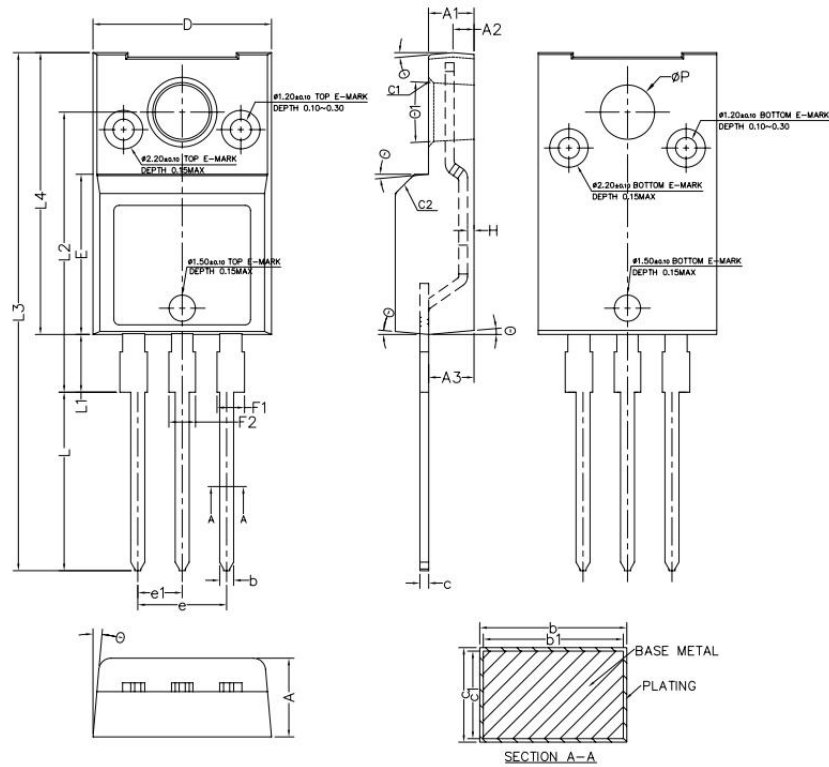


Mechanical Dimensions
TO-252 (Package 1)
Unit: mm


Symbol	Dimensions(mm)		
	Min.	Typ.	Max.
A	2.20	2.30	2.38
A1	0	-	0.10
A2	0.90	1.01	1.10
b	0.72	-	0.85
b1	0.71	0.76	0.81
b2	0.72	-	0.90
b3	5.13	5.33	5.46
c	0.47	-	0.60
c1	0.46	0.51	0.56
C2	0.47	-	0.60
D	6.0	6.10	6.20
D1	5.25	-	-
E	6.50	6.60	6.70
E1	4.70	-	-
e	2.186	2.286	2.386
H	9.80	10.10	10.40
L	1.40	1.50	1.70
L1	2.90REF		
L2	0.51BSC		
L3	0.90	-	1.25
L4	0.60	0.80	1.00
L5	0.15	-	0.75
L6	1.80REF		
Θ	0°	-	8°
Θ1	5°	7°	9°
Θ2	5°	7°	9°

Mechanical Dimensions
TO-252 (Package 2)
Unit: mm


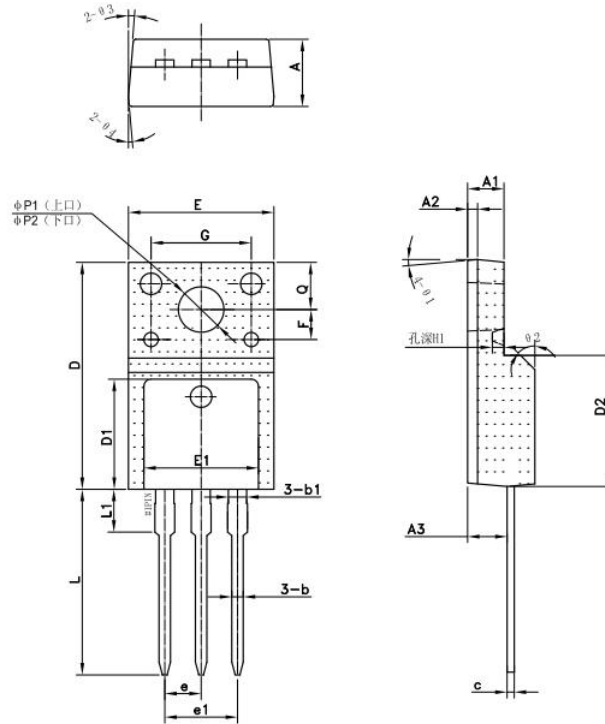
Symbol	Dimensions(mm)		
	Min.	Typ.	Max.
A	2.20	2.30	2.38
A1	0	-	0.127
A2	0.90	1.01	1.10
b	0.635	0.76	0.86
b1	-	0.76	-
b2	5.2	5.33	5.46
c	0.47	0.50	0.60
c1	0.47	0.50	0.60
D	6.0	6.10	6.20
D1	-	5.30	-
E	6.50	6.60	6.70
E1	-	4.83	-
e	2.286(BSC)		
H	9.70	10.10	10.40
L	1.40	1.50	1.70
L1	0.90	-	1.25
L2	-	1.0	-
L3	-	0.8	-
φP	-	1.2	-
Θ	0°	-	8°
Θ1	5°	7°	9°
Θ2	5°	7°	9°

Mechanical Dimensions
TO-220F (Package 1)
Unit: mm


Symbol	Dimensions(mm)		
	Min.	Typ.	Max.
A	4.40	4.50	4.60
A1	2.50	2.60	2.70
A2	1.10	1.20	1.30
A3	2.49	2.59	2.69
b	0.76	-	0.89
b1	0.75	0.80	0.85
c	0.46	-	0.59
c1	0.45	0.50	0.55
C1	0.20	0.30	0.40
C2	1.00	1.10	1.20
D	10.10	10.20	10.30
E	9.05	9.15	9.25
e	4.98	5.08	5.18
e1	2.44	2.54	2.64
F1	1.22	-	1.60
F2	1.17	-	1.55
H	0.32	0.37	0.42
L	10.00	10.20	10.40
L1	3.15	3.30	3.45
L2	15.85	16.00	16.15
L3	29.30	29.60	29.90
L4	16.00	16.10	16.20
P	3.00	3.10	3.20
θ	3°	5°	7°
θ1	4°	6°	8°

Mechanical Dimensions
TO-220F (Package 2)

Unit: mm

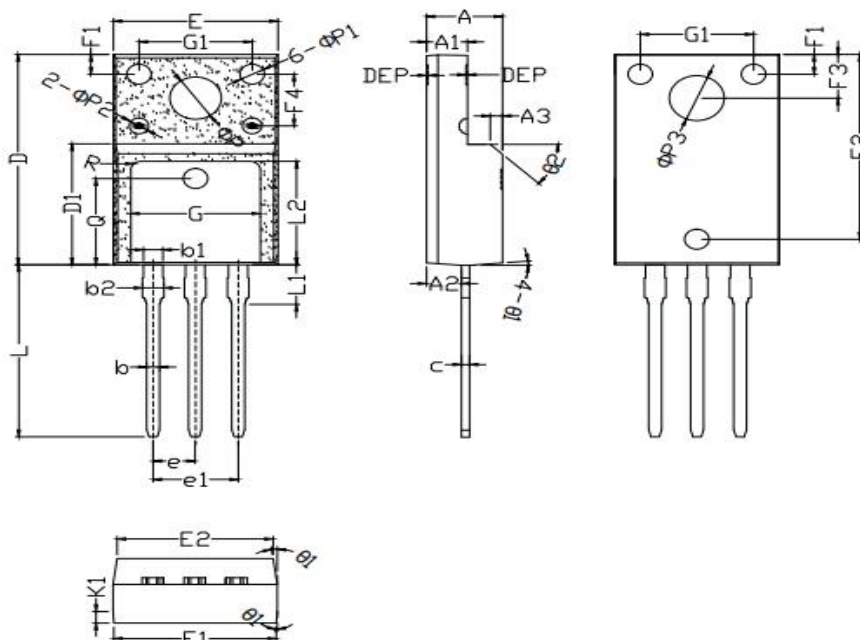


Symbol	Dimensions(mm)		
	Min.	Typ.	Max.
A	4.50	4.70	4.90
A1	2.34	2.54	2.70
A2	-	0.70	-
A3	2.56	2.76	2.96
b	0.70	0.80	0.95
b1	-	1.28	-
c	0.45	0.50	0.65
D	15.67	15.87	16.07
D1	-	7.70	-
D2	-	9.12	-
E	9.96	10.16	10.36
E1	-	8.00	-
e	2.54		
e1		5.08	
F		2.1	
G		7	
H1	-	0.81	-
L	12.48	12.98	13.20
L1	-	2.93	-
ΦP1 (上口)	2.98	3.18	3.38
ΦP2 (下口)	3.20	3.40	3.60
Q	3.10	3.30	3.50
θ1		5°	
θ2		45°	
θ2		5°	
θ3		5°	

Mechanical Dimensions

TO-220F (Package 3)

Unit: mm



Symbol	Dimensions(mm)		
	Min.	Typ.	Max.
A	4.50	4.70	4.90
A1	2.34	2.54	2.74
A2	2.60	2.80	2.95
A3	1.0REF		
b	0.75	0.80	0.85
b1	1.18	1.20	1.24
b2	1.18	1.24	1.30
c	0.45	0.50	0.55
D	15.67	15.87	16.07
D1	9.04	9.12	9.20
E	10.00	10.16	10.30
E1	9.94	10.06	10.30
E2	9.40	9.50	9.60
e	2.50	2.54	2.58
e1	5.08REF		
L	12.78	12.98	13.18
L1	2.70	2.92	3.20
L2	7.70	7.80	7.90
Q	6.50REF		
ΦP	3.08	3.18	3.28
ΦP1	1.45	1.55	1.65
ΦP2	0.95	1.15	1.35
ΦP3	3.30	3.40	3.50
θ1	3°	5°	7°
θ2	42°	45°	48°
F1	1.40	1.50	1.60
F2	13.80	13.90	14.00
F3	3.20	3.30	3.40
F4	3.70	3.90	4.10
G	7.80	8.00	8.20
G1	6.90	7.00	7.10
K1	0.65	0.70	0.75



Shenzhen Sanrise Technology Co., LTD

<http://www.sanrise-tech.com>

IMPORTANT NOTICE

Shenzhen Sanrise Technology Co., LTD reserves the right to make changes without further notice to any products or specifications herein. Shenzhen Sanrise Technology Co., LTD does not assume any responsibility for use of any its products for any particular purpose, nor does Shenzhen Sanrise Technology Co., LTD assume any liability arising out of the application or use of any its products or circuits. Shenzhen Sanrise Technology Co., LTD does not convey any license under its patent rights or other rights nor the rights of others.

Main Site:

- Headquarter

Shenzhen Sanrise Technology Co., LTD.

A1206, Skyworth building, No. 008, gaoxinnan 1st Road,
Gaoxin District, Yuehai street,, Nanshan District, ShenZhen,
P.R.China

Tel: +86-755-22953335

Fax: +86-755-22916878

- Shanghai Office

Shenzhen Sanrise Technology Co., LTD.

Rm.401, Building B, No. 666, Zhangheng Road,
Zhangjiang Hi-Tech Park, Shanghai, P.R.China

Tel: +86-21-68825918