
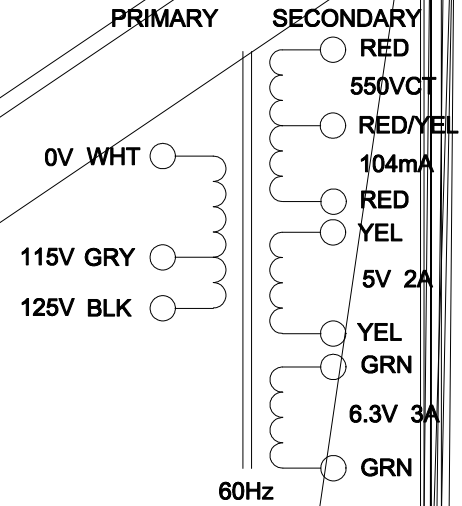


DIMENSIONS:

A	2.500" ± 0.063
B	3.000" ± 0.125
C	3.060" ± 0.063
D	2.000" ± 0.063
E	1.938" ± 0.063
G	0.203" x 0.375" ± 0.015

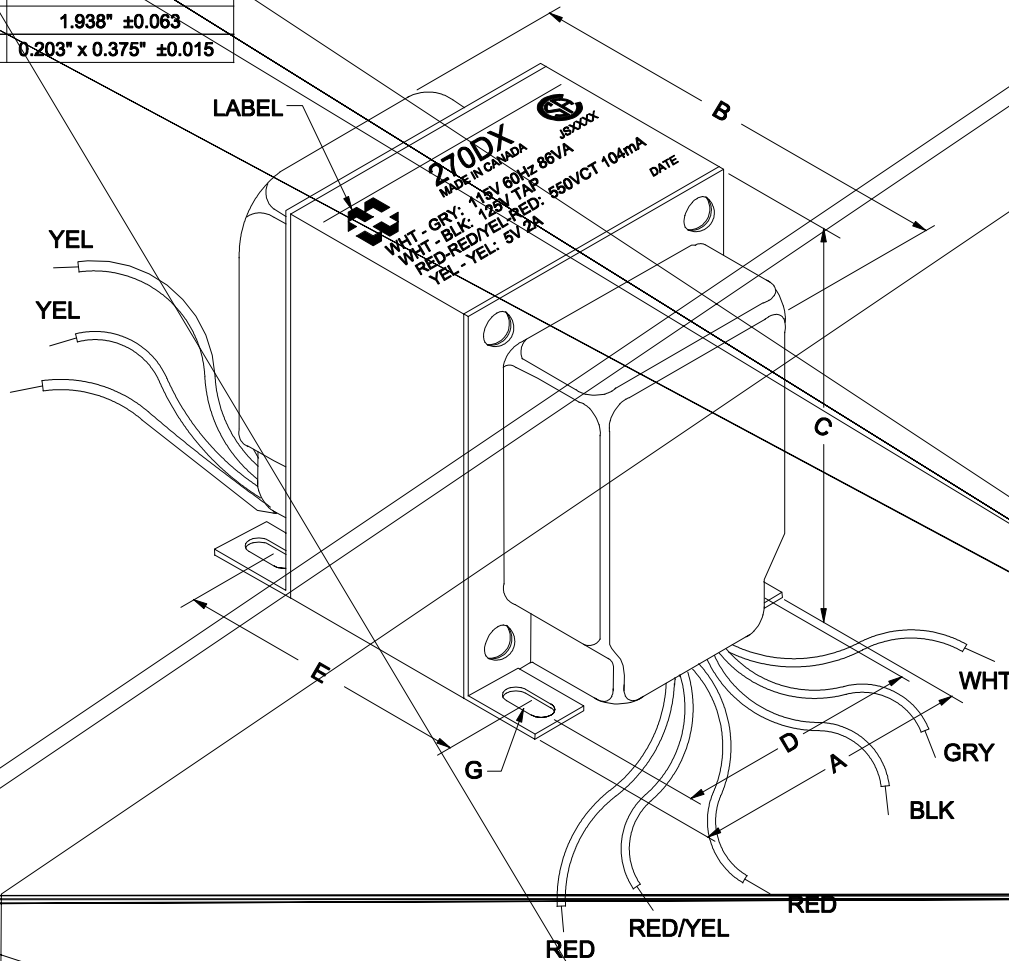

SECONDARY RATED
VOLTAGES UNDER LOAD

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 125V, 60Hz, WHT - BLK	190mA	Max.
Sec. N.L.V	@ 125V, 60Hz, WHT - BLK	RED - RED = 603.6V	$\pm 2\%$
		RED - RED/YEL = RED/YEL - RED = 301.8V	$\pm 2\%$
		GRN - GRN = 6.344V	$\pm 2\%$
DCR	@ 20°C, WHT - BLK =	4.468 Ω	$\pm 20\%$
		29.25 Ω	

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™		ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	C.I. 11/08/12					
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 270DX	
			DATE: 11/08/12	APP'D. BY: DIMENSIONS: IN(X) MM()			