


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-F-001888	K.D	H.O	07.04.19					

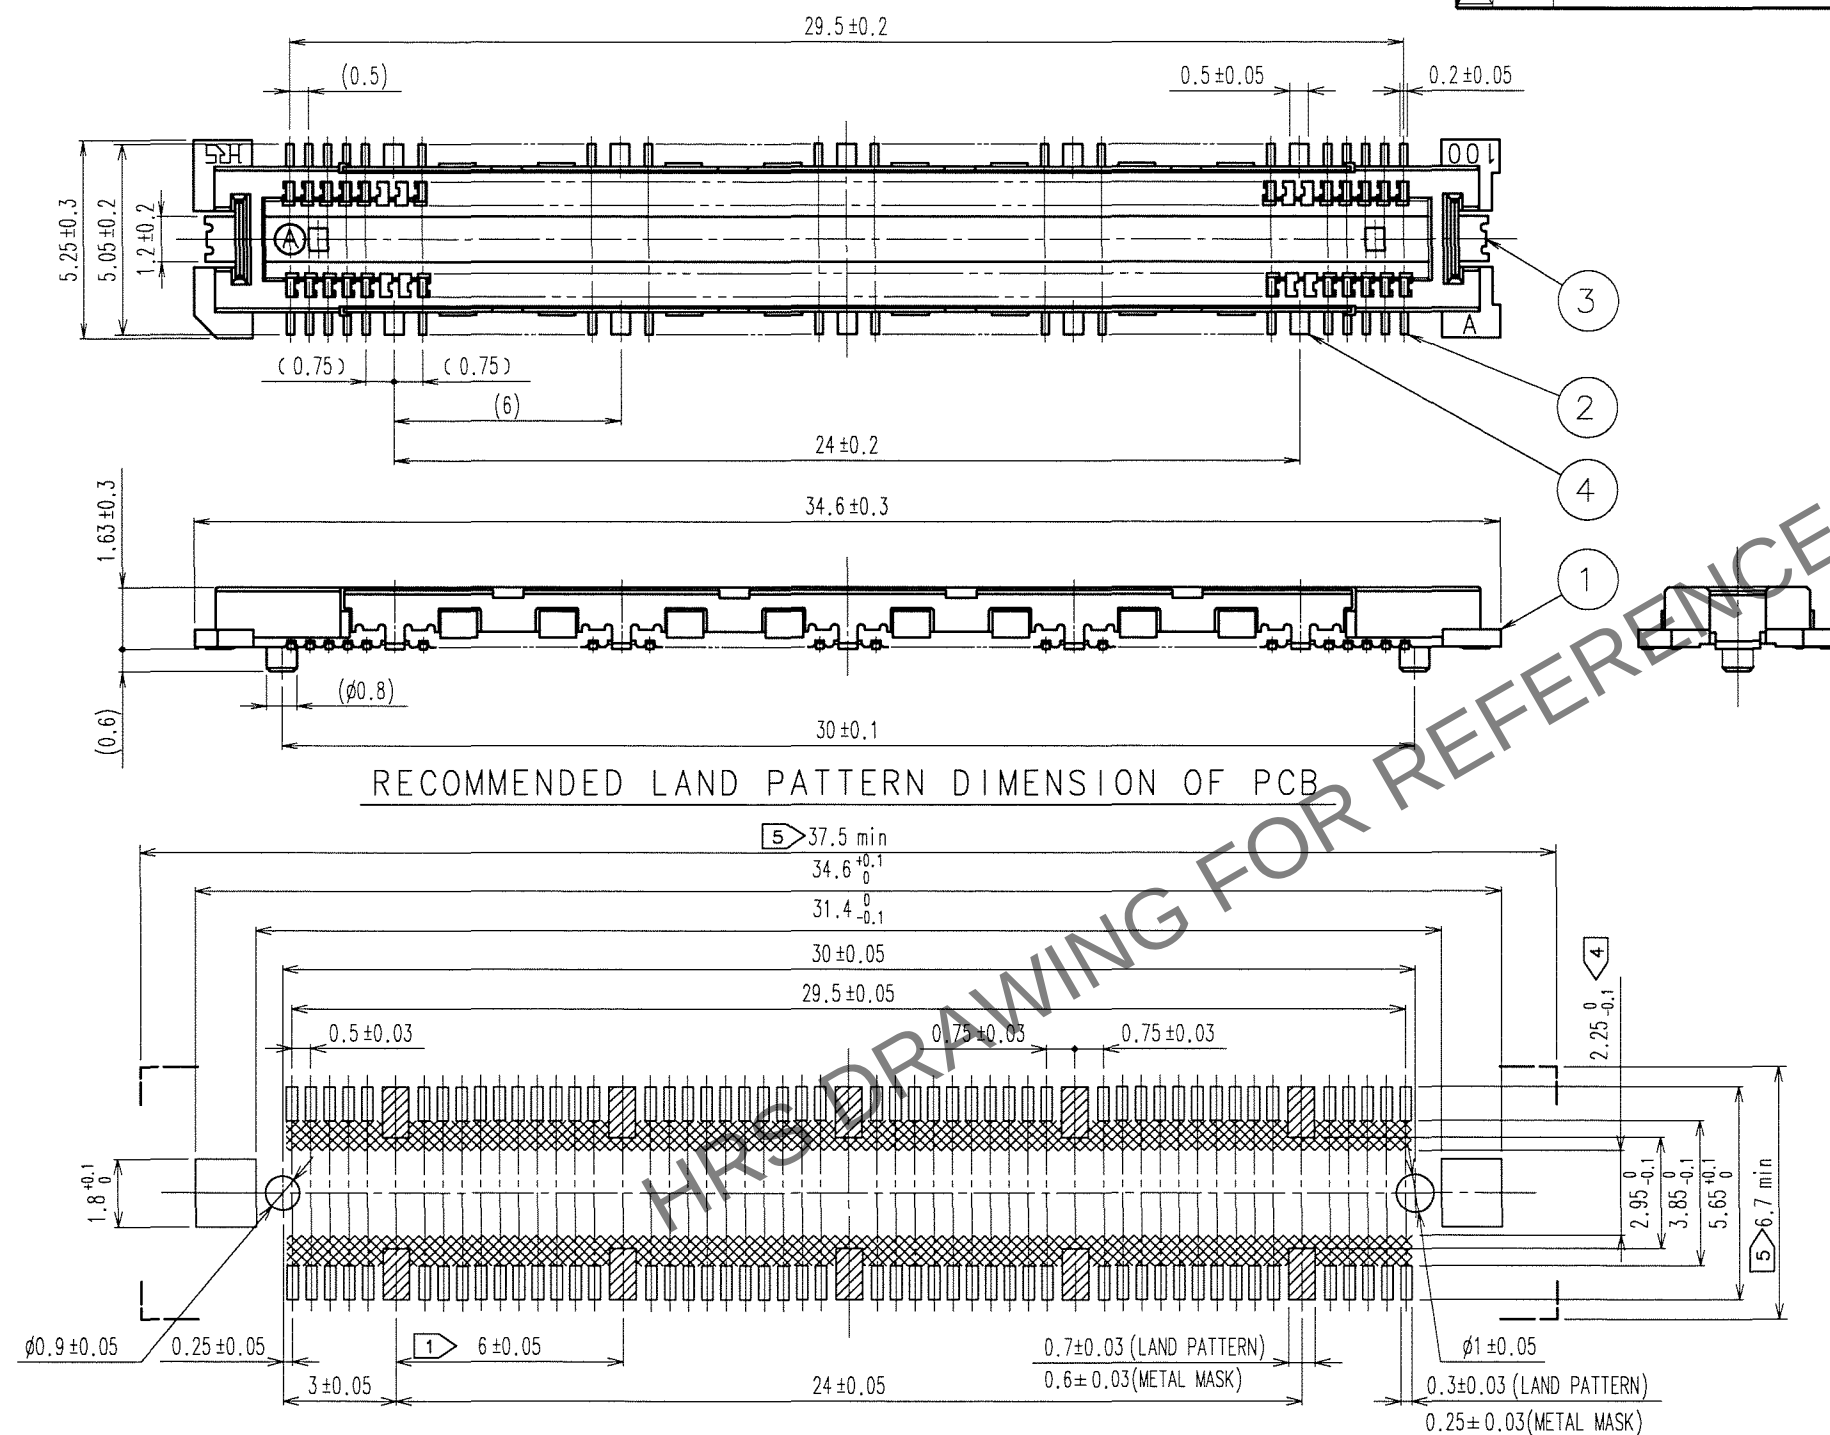

RECOMMENDED LAND PATTERN DIMENSION OF PCB

- NOTES
- 10 HATCHED PARTS:GROUND CIRUIT.
 - SMT LEAD-COPLANARITY:0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO AREA ,OR MATING PAIR CANNOT BE MATED.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	LCP	BEIGE	UL94V-0	4	PHOSPHOR BRONZE	TIN PLATING
NO.	MATERIAL	FINISH, REMARKS		3	PHOSPHOR BRONZE	TIN PLATING
CODE NO.(OLD)	CL			2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min. LEAD AREA : GOLD FLASH UNDER PLATING : NICKEL 1μm min.
DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
K.DOI	K.DOI	H.OZAWA	H.OKAWA			
'05-09-02	'05-09-02	'05-09-02	'05-09-02			
DRAWING NO.	EDC3-152094-25	PART NO.	FX11LA-100P/10-SV(71)			
SCALE	5 : 1	CODE NO.	CL573-0004-2-71			
UNITS	mm					