




Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

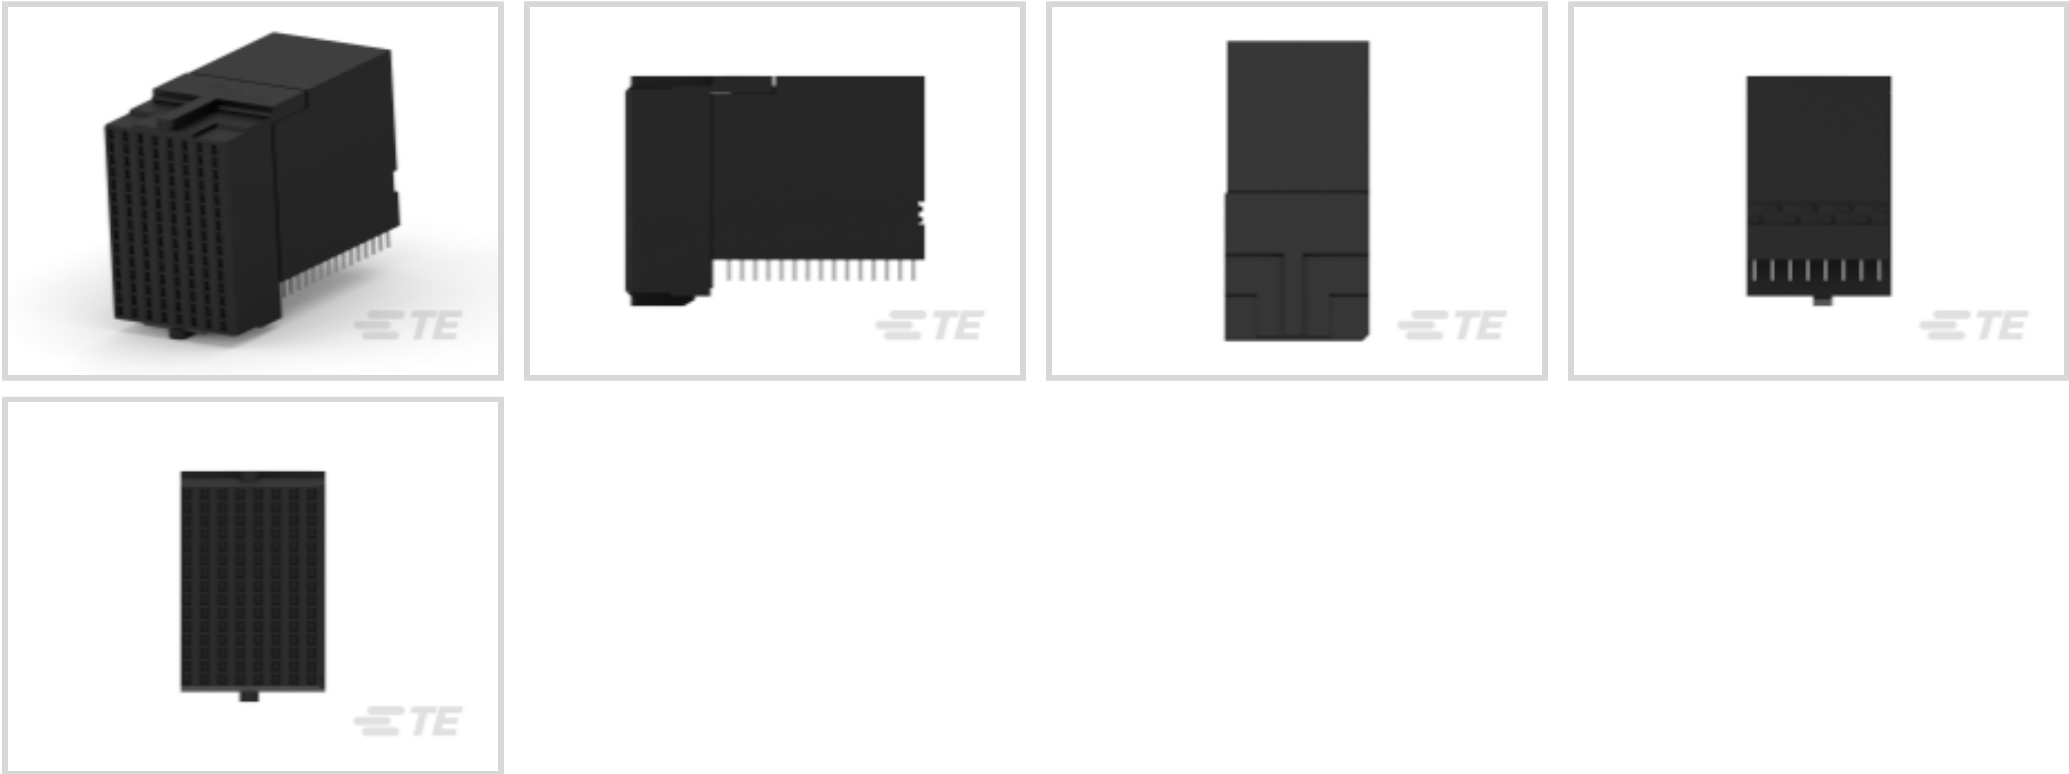

Number of Positions: 120
Row-to-Row Spacing: 1.4 mm [.055 in]
Mating Alignment: With
Mating Alignment Type: Guide Slot
Number of Rows: 15

Features

Product Type Features

Signal Arrangement	Differential
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Receptacle
Shroud Style	Unshrouded

Configuration Features

Pairs per Column	5
Number of Pairs	40
Stackable	No
Number of Signal Positions	80
Backplane Architecture	Traditional Backplane
Number of Positions	120
Number of Rows	15
Number of Columns	8



PCB Mount Orientation	Right Angle
Electrical Characteristics	
Impedance	100 Ω
Operating Voltage	250 VAC
Signal Characteristics	
Differential Impedance	100 Ω
Number of Differential Pairs per Column	5
Data Rate	10 Gb/s
Body Features	
Shield Material	Phosphor Bronze
Primary Product Color	Black
Contact Features	
PCB Contact Termination Area Plating Material Thickness	.5 μm[20 μin]
Contact Type	Receptacle
Contact Mating Area Plating Material	Gold
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Dual Beam
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	.5 A
Termination Features	
Termination Post & Tail Length	2.2 mm[.087 in]
Termination Method to PCB	Through Hole - Press-Fit
Mechanical Attachment	
Guide Hardware	Without
Mating Retention	Without
PCB Mount Alignment	Without
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail
Mating Alignment	With
Mating Alignment Type	Guide Slot
Connector Mounting Type	Board Mount



Housing Features

Number of Shrouded Sides	0
End Wall Location	None
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	1.9 mm[.075 in]

Dimensions

Connector Length	15.35 mm
Connector Height	24.4 mm
Connector Width	31.81 mm
PCB Thickness (Recommended)	1.57 mm[.062 in]
PCB Hole Diameter	.47 mm
Row-to-Row Spacing	1.4 mm[.055 in]

Usage Conditions

Operating Temperature Range	-65 – 90 °C[-85 – 194 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Compatible With Agency/Standards Products	UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Method	Box & Tube, Tube
------------------	------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per



homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1934271-1
Tin Man Header Assy 5x8 Double



TE Part # 1934272-1
Tin Man Header Assy 5x8 left



TE Part # 1934273-1
Tin Man Header Assy 5x8 Left



TE Part # 1934350-1
TinMan R/A Header Assy 5x8 Dou




TE Part # 1934269-1
Tin Man Header Assy 5x8 Open



TE Part # 1934349-1
TinMan R/A Header Assy 5x8 Open

Also in the Series | Z-PACK TinMan

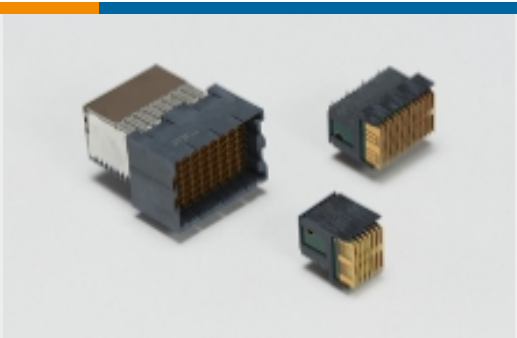

High Speed Backplane Connectors(65)

Customers Also Bought





TE Part #1-640456-0
10P MTA100 HDR ASSY F/L SQ STR



TE Part #1-2007394-7
SFP+ assy 2x4 EMI Spg Outer LP Sn Enhanc



TE Part #2007263-1
SFP+ 1x2 Cage Assembly



TE Part #5-2176363-6
RQ 0402 1K62 0.1% 10PPM 5K RL



TE Part #ANT-916-CW-HW
Antenna 1/2 Wave Dipole Whip
916MHz RPS



TE Part #1-2314790-1
ZQSFP+ 2X1 BELLY TO BELLY
CAGE&CONN



TE Part #2379699-1
QSFP28, 1X2, CAGE ASSY, SPR, HS,
0.5DGR



TE Part #2355740-1
1X1 QSFP CAGE, SOLDER, 0.5 TILT,W
/HS



TE Part #2396486-7
#4 RAPID LOCK PIN, LOCKING
GROOVE, SM

Documents

Product Drawings

Tin Man Recept Assy 5 pair 8 Column

English

Tin Man Recept Assy 5 pair 8 Column

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1934218-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1934218-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1934218-1_B.3d_stp.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

High Speed Backplane Connectors catalog - Z-PACK TinMan High Speed, High Density Backplane Connector

English

Solutions for AdvancedTCA, AdvancedTCA 300, MicroTCA, and AdvancedMC Standards Datasheet 3-1773445-8

English

Z-PACK TinMan High Speed High Density Backplane Connector Catalog 5-1773447-9

English

Product Specifications

Application Specification

English