


Wall mounted receptacle - Part no. 132A



- screw terminals
- with X-CONTACT
- internal fixing
- enclosure base can be turned 180°
- with 6 fixing points to accommodate special terminals
- products with pilot contact on request

Technical information

Ampere	63 A
Poles	4 p
Voltage	400 V
Earth position	6 h
Hertz	50-60 Hz
Connection technology	Screw terminals, X-CONTACT
Contact	standard
Protection type	IP 67

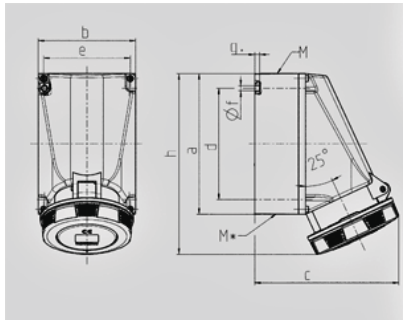

Drawing 1 MB 112 Dim. in mm	Amp. Poles	63		
		3	4	5
a		170	170	170
b		118	118	118
c		175	175	175
d		134,5	134,5	134,5
e		103	103	103
f		6,1	6,1	6,1
g		6	6	6
h		219	219	219
M		40	40	40
M*		2x40 (blind) to be cut out		
Max. cable diam. (mm)		27	27	27
Terminal for cond. cross section (mm²) min.-max.		6 —25	6 —25	6 —25