



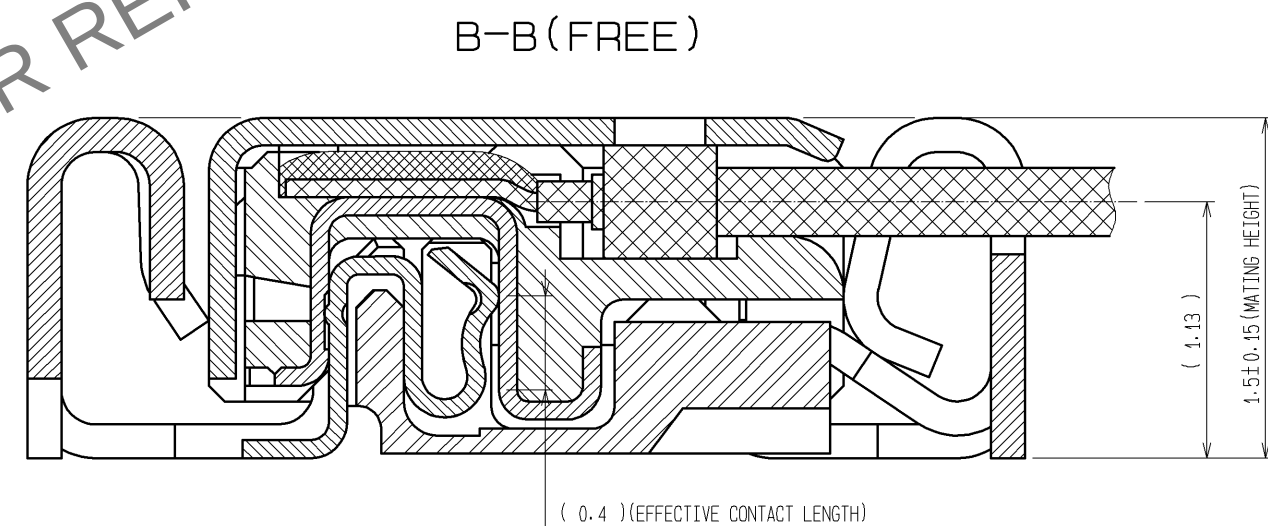

1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
3. LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE: 8GFD
-YEAR: 2008 MONTH: July DAY: 15 LINE No.: 4
4. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
5. SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS ARE COVERED BY METAL SHIELDING.

3											
YEAR		MONTH		DAY						LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE	LINE No.	CODE
10	0	Jan	A	1	1	11	B	21	M	1	A
11	1	Feb	B	2	2	12	C	22	N	2	B
12	2	Mar	C	3	3	13	D	23	P	3	C
13	3	Apr	D	4	4	14	E	24	Q	4	D
14	4	May	E	5	5	15	F	25	R	5	E
15	5	Jun	F	6	6	16	G	26	S	6	F
16	6	Jul	G	7	7	17	H	27	T	7	G
17	7	Aug	H	8	8	18	J	28	U	8	H
08	8	Sep	I	9	9	19	K	29	V	9	I
09	9	Oct	J	10	A	20	L	30	W	10	J
		Nov	K					31	X		
		Dec	L								

				6	PS	BLACK	
				5	POLYESTER	CLEAR	
2	LCP	UL94V-0		4	PS	CLEAR	
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.3μm min LEAD AREA : Au PLATING 0.1μm min UNDER PLATING : Ni PLATING 2μm min		3	PHOSPHOR BRONZE	WHOLE AREA : Sn PLATING 1μm min UNDER PLATING : Cu PLATING 0.2μm min	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	
UNITS mm		SCALE 5 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-H-003953		DESIGNED HY. SHIOZAWA	CHECKED TS. FUKUSHIMA DATE 09.06.17
HIROSE ELECTRIC CO., LTD.		APPROVED : TY. OMA	07.01.11	DRAWING NO. EDC3-313271-01			
		CHECED : TS. SAKATA	07.01.11	PART NO. DF36A-25S-0.4V(51)			
		DESIGNED : MN. KENJO	07.01.09	CODE NO. CL662-4011-4-51			
		DRAWN : MN. KENJO	07.01.09				

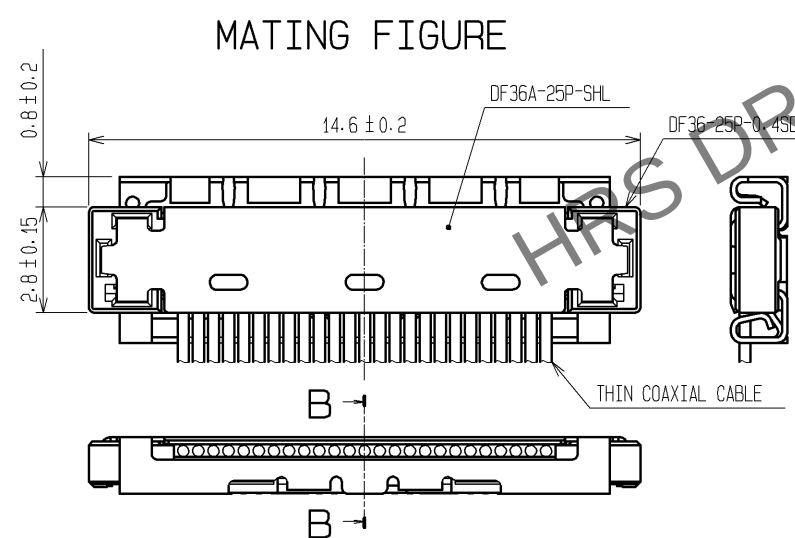