

Cemented Wirewound Resistors with Lugs



FEATURES

- Complete welded construction
- Ceramic core
- Available in adjustable = "E" or non inductive design = "Ni"
- Lugs with various termination styles for soldering or bolt connection
- Compliant to RoHS Directive 2002/95/EC



RoHS
COMPLIANT

GREEN
(5-2008)**

STANDARD ELECTRICAL SPECIFICATIONS						
MODEL	VARIANT/ TERMINAL	POWER RATING <i>P</i> _{40 °C}	LIMITING VOLTAGE	RESISTANCE RANGE ⁽¹⁾		TOLERANCE
				TCR - 10 ... - 80 ppm/K	TCR 100 ... 180 ppm/K	
ZWS6	SL	6 W	$\sqrt{P \times R}$	0.82 Ω to 5.1 kΩ	1.8 Ω to 13 kΩ	± 10 %, ± 5 %
	E SL			2.7 Ω to 5.1 kΩ	-	± 2 %
	Ni SL			0.82 Ω to 130 Ω	1.8 Ω to 4.7 kΩ	± 10 %, ± 5 %
				0.15 Ω to 910 Ω	0.33 Ω to 2.4 kΩ	± 10 %
				1 Ω to 910 Ω	2 Ω to 2.4 kΩ	± 5 %
ZWS8	SL, SS	8 W	$\sqrt{P \times R}$	0.68 Ω to 7.5 kΩ	1.8 Ω to 20 kΩ	± 10 %, ± 5 %
	E SL, E SS			3.3 Ω to 7.5 kΩ	-	± 2 %
	Ni SL, Ni SS			0.62 Ω to 200 Ω	1.8 Ω to 6.8 kΩ	± 10 %, ± 5 %
				0.24 Ω to 1.3 kΩ	0.56 Ω to 3.6 kΩ	± 10 %
				1 Ω to 1.3 kΩ	2 Ω to 3.6 kΩ	± 5 %
ZWS12	SL, SS	12 W	$\sqrt{P \times R}$	0.62 Ω to 10 kΩ	1.8 Ω to 27 kΩ	± 10 %, ± 5 %
	E SL, E SS			3 Ω to 10 kΩ	-	± 2 %
	Ni SL, Ni SS			0.56 Ω to 270 Ω	1.8 Ω to 9.1 kΩ	± 10 %, ± 5 %
				0.33 Ω to 1.8 kΩ	0.75 Ω to 5.1 kΩ	± 10 %
				1 Ω to 1.8 kΩ	2 Ω to 5.1 kΩ	± 5 %
ZWS15	SL, SS	15 W	$\sqrt{P \times R}$	0.68 Ω to 12 kΩ	2.2 Ω to 33 kΩ	± 10 %, ± 5 %
	E SL, E SS			2.2 Ω to 12 kΩ	-	± 2 %
	Ni SL, Ni SS			0.68 Ω to 330 Ω	2.2 Ω to 11 kΩ	± 10 %, ± 5 %
				0.39 Ω to 2.2 kΩ	0.82 Ω to 6.2 kΩ	± 10 %
				1 Ω to 2.2 kΩ	2.0 Ω to 6.2 kΩ	± 5 %
ZWS20	SL, SS, SB, FST	20 W	$\sqrt{P \times R}$	0.62 Ω to 16 kΩ	1.3 Ω to 43 kΩ	± 10 %, ± 5 %
	E SL, E SS, E SB, E FST			2.7 Ω to 16 kΩ	-	± 2 %
	Ni SL, Ni SS, Ni SB, Ni FST			0.62 Ω to 430 Ω	1.3 Ω to 15 kΩ	± 10 %, ± 5 %
				0.47 Ω to 2.7 kΩ	1.1 Ω to 8.2 kΩ	± 10 %
				1 Ω to 2.7 kΩ	2 Ω to 8.2 kΩ	± 5 %
ZWS35	SL, SS, SB, FST	35 W	$\sqrt{P \times R}$	1.1 Ω to 30 kΩ	2.7 Ω to 82 kΩ	± 10 %, ± 5 %
	E SL, E SS, E SB, E FST			1.3 Ω to 30 kΩ	-	± 2 %
	Ni SL, Ni SS, Ni SB, Ni FST			1.1 Ω to 750 Ω	2.7 Ω to 27 kΩ	± 10 %, ± 5 %
				0.91 Ω to 5.1 kΩ	2 Ω to 15 kΩ	± 10 %, ± 5 %
ZWS50	SS, SSB, SB, FST	50 W	$\sqrt{P \times R}$	1.3 Ω to 33 kΩ	3 Ω to 91 kΩ	± 10 %, ± 5 %
	E SS, E SSB, E SB, E FST			2.2 Ω to 33 kΩ	-	± 2 %
	Ni SS, Ni SSB, Ni SB, Ni FST			1.3 Ω to 910 Ω	3 Ω to 33 kΩ	± 10 %, ± 5 %
				1.1 Ω to 6.2 kΩ	2.4 Ω to 16 kΩ	± 10 %, ± 5 %
ZWS100	SS, SSB, SB, FST	100 W	$\sqrt{P \times R}$	2.7 Ω to 68 kΩ	6.2 Ω to 68 kΩ	± 10 %, ± 5 %
	E SS, E SSB, E SB, E FST			-	± 2 %	
	Ni SS, Ni SSB, Ni SB, Ni FST			2.7 Ω to 1.8 kΩ	6.2 Ω to 68 kΩ	± 10 %, ± 5 %
				2.2 Ω to 13 kΩ	4.7 Ω to 33 kΩ	± 10 %, ± 5 %

Notes

⁽¹⁾ Resistance value to be selected for $\pm 10\%$ tolerance from E12 and for $\pm 5\%$ and $\pm 2\%$ from E24

- For available "Mounting Accessories for Resistors", please see: www.vishay.com/ppg?21015

** Please see document "Vishay Material Category Policy": www.vishay.com/doc?99902



STANDARD ELECTRICAL SPECIFICATIONS

MODEL	VARIANT/ TERMINAL	POWER RATING $P_{40^{\circ}\text{C}}$	LIMITING VOLTAGE	RESISTANCE RANGE ⁽¹⁾		TOLERANCE
				TCR - 10 ... - 80 ppm/K	TCR 100 ... 180 ppm/K	
ZWS150	SS, SSB, SB, FST	150 W	$\sqrt{P \times R}$	4.7 Ω to 130 k Ω	11 Ω to 360 k Ω	$\pm 10\%$, $\pm 5\%$
	E SS, E SSB, E SB, E FST			4.7 Ω to 3.3 k Ω	-	$\pm 2\%$
	Ni SS, Ni SSB, Ni SB, Ni FST			3.9 Ω to 22 k Ω	11 Ω to 120 k Ω	$\pm 10\%$, $\pm 5\%$
ZWS250	SS, SSB, SB, FST	250 W	$\sqrt{P \times R}$	8.2 Ω to 220 k Ω	20 Ω to 620 k Ω	$\pm 10\%$, $\pm 5\%$
	E SS, E SSB, E SB, E FST			8.2 Ω to 6.2 k Ω	-	$\pm 2\%$
	Ni SS, Ni SSB, Ni SB, Ni FST			6.8 Ω to 39 k Ω	20 Ω to 220 k Ω	$\pm 10\%$, $\pm 5\%$
ZWS30/100	SS, SSB, SB, FST	75 W	$\sqrt{P \times R}$	2.4 Ω to 62 k Ω	5.1 Ω to 180 k Ω	$\pm 10\%$, $\pm 5\%$
	E SS, E SSB, E SB, E FST			3 Ω to 62 k Ω	-	$\pm 2\%$
	Ni SS, Ni SSB, Ni SB, Ni FST			2.4 Ω to 1.6 k Ω	5.1 Ω to 56 k Ω	$\pm 10\%$, $\pm 5\%$
ZWS30/133	SS, SSB, SB, FST	110 W	$\sqrt{P \times R}$	3.3 Ω to 91 k Ω	4.3 Ω to 30 k Ω	$\pm 10\%$, $\pm 5\%$
	E SS, E SSB, E SB, E FST			3.3 Ω to 2.4 k Ω	7.5 Ω to 240 k Ω	$\pm 10\%$, $\pm 5\%$
	Ni SS, Ni SSB, Ni SB, Ni FST			2.7 Ω to 16 k Ω	-	$\pm 2\%$

Notes

(1) Resistance value to be selected for $\pm 10\%$ tolerance from E12 and for $\pm 5\%$ and $\pm 2\%$ from E24

- For available "Mounting Accessories for Resistors", please see: www.vishay.com/ppg?21010

PART NUMBER AND PRODUCT DESCRIPTION

Part Number: ZWS006331001KLX000

Z W S 0 0 6 3 3 1 0 0 1 K L X 0 0 0

MODEL	VARIANT/ TERMINAL	TCR/MATERIAL	VALUE	TOLERANCE CODE	PACKAGING CODE	SPECIAL
ZWS006 = ZWS6 ZWS008 = ZWS8 ZWS012 = ZWS12 ZWS015 = ZWS15 ZWS020 = ZWS20 ZWS035 = ZWS35 ZWS050 = ZWS50 ZWS100 = ZWS100 ZWS150 = ZWS150 ZWS250 = ZWS250 ZWSN68 = ZWS6/30 ZWSN84 = ZWS30/100 ZWSN91 = ZWS30/133 ZWSN94 = ZWS30/145 ZWSN97 = ZWS30/235 ZWSN98 = ZWS50/165 ZWSOSM = ZWS10/30 (Note: Ni is also known as SWI)	3 = SL 4 = SS 5 = SB 6 = SSB 7 = FST 8 = E SL 9 = E SS A = E SB B = E SSB C = E FST D = Ni SL E = Ni SS F = Ni SB G = Ni SSB H = Ni FST I = GSCH Z = Value overflow (BV)	1 = - 10 ... - 80 ppm/K WM 50 Class 1 3 = 100 ... 180 ppm/K WM 110 Class 3 0 = SWI	3 digit value 1 digit multiplier MULTIPLIER 7 = $\cdot 10^{-3}$ 8 = $\cdot 10^{-2}$ 9 = $\cdot 10^{-1}$ 0 = $\cdot 10^0$ 1 = $\cdot 10^1$ 2 = $\cdot 10^2$ 3 = $\cdot 10^3$	G = $\pm 2.0\%$ J = $\pm 5.0\%$ K = $\pm 10.0\%$ 0 = by BV	LX = Loose pack, without quantity ZX = Special pack (with BV #), without quantity	The 5 digit BV number will be encoded using a 36 character code. This code contains numbers 0...9 and letters A...Z (36 characters total) and allows to encode at least 46 655 five digit BV numbers. 000 = Standard

Product Description: ZWS6 SL 3 1K0 10 % LX

ZWS6	SL	3	1K0	10 %	LX
MODEL ⁽¹⁾	VARIANT/ TERMINAL ⁽¹⁾	TCR/MATERIAL ⁽¹⁾	VALUE ⁽¹⁾	TOLERANCE CODE ⁽¹⁾	PACKAGING DESCRIPTION ⁽²⁾


Notes

(1) See "Part Number" above


(2) See "Packaging Code" above

DIMENSIONS

SL TERMINALS

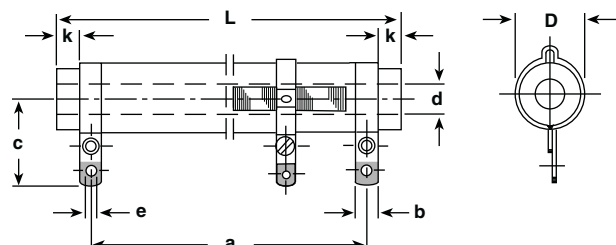


SS TERMINALS

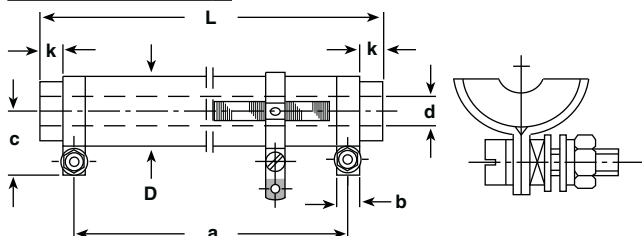


ADJUSTABLE LUGS


ZWS 6 E
ZWS 8 E



from ZWS 12 E




CORE SECTION




MODEL	DIMENSIONS in millimeters [inches]						
	ZWS 6 ZWS 6 E ZWS 6 Ni	ZWS 8 ZWS 8 E ZWS 8 Ni		ZWS 12 ZWS 12 E ZWS 12 Ni		ZWS 15 ZWS 15 E ZWS 15 Ni	
TERMINAL	SL	SL	SS	SL	SS	SL	SS
DIMENSION D	7.5 ± 0.5 [0.295 ± 0.020]	9.5 ± 0.5 [0.374 ± 0.020]		11.8 ± 0.8 [0.465 ± 0.031]		11.8 ± 0.8 [0.465 ± 0.031]	
L	45 ± 1.5 [1.772 ± 0.059]	50 ± 1.5 [1.969 ± 0.059]		55 ± 1.5 [2.165 ± 0.059]		62 ± 2 [2.441 ± 0.079]	
a	36 [1.417]	39 [1.535]	40 [1.575]	43 [1.693]	44 [1.732]	50 [1.969]	51 [2.008]
b	4 [0.157]	4 [0.157]	5 [0.197]	4 [0.157]	5 [0.197]	4 [0.157]	5 [0.197]
b ₁	4 [0.157]	4 [0.157]	4 [0.157]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]
c	15.5 [0.610]	18 [0.709]	10.5 [0.413]	19 [0.748]	11.5 [0.453]	19 [0.748]	11.5 [0.453]
d	2.6 [0.102]	3.5 [0.138]	3.5 [0.138]	5.5 [0.217]	5.5 [0.217]	5.5 [0.217]	5.5 [0.217]
e	1.5 [0.059]	2 [0.079]	M3 × 12	2 [0.079]	M3 × 12	2 [0.079]	M3 × 12
e ₁	2.8 [0.110]	2.8 [0.110]	2.8 [0.110]	2.8 [0.110]	2.8 [0.110]	2.8 [0.110]	2.8 [0.110]
k	2.5 [0.098]	3.5 [0.138]	2.5 [0.098]	4 [0.157]	3 [0.118]	4 [0.157]	3 [0.118]
MASS (g)	5	6.5		11.5		12.5	

DIMENSIONS (continued)


SL TERMINALS

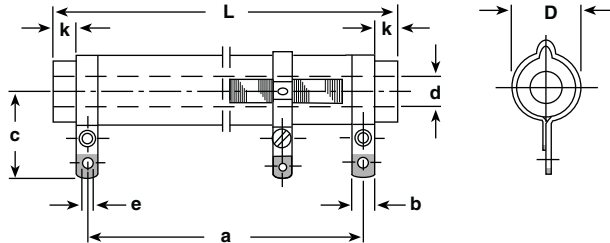


FST TERMINALS

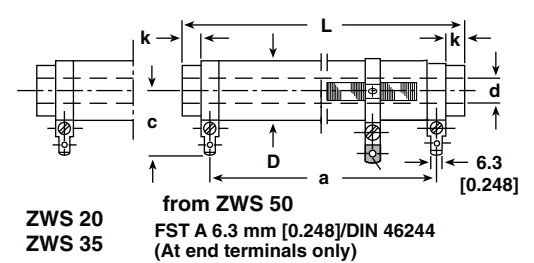


SS AND SSB TERMINALS

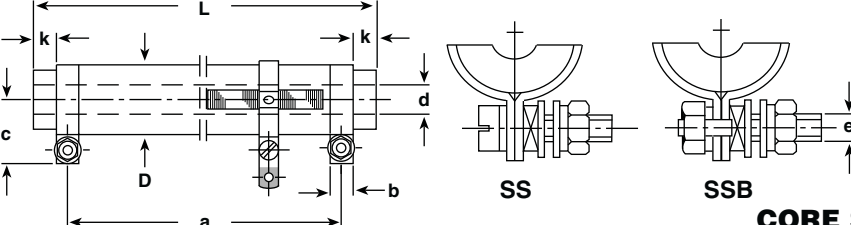


SB TERMINALS

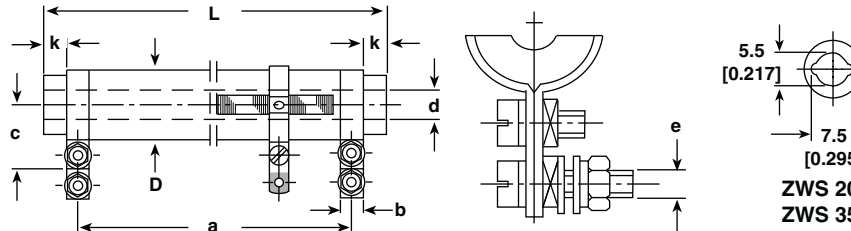





CORE SECTION

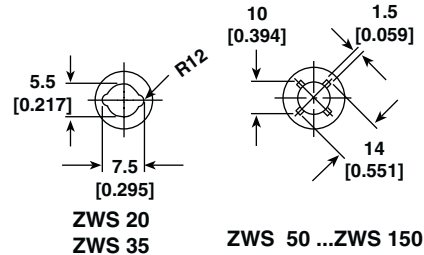


ADJUSTABLE LUGS



MODEL	DIMENSIONS in millimeters [inches]															
	ZWS 20 ZWS 20 E ZWS 20 Ni				ZWS 35 ZWS 35 E ZWS 35 Ni				ZWS 50 ZWS 50 E ZWS 50 Ni				ZWS 100 ZWS 100 E ZWS 100 Ni			
TERMINAL	SL	SS	SB	FST	SL	SS	SB	FST	SS	SSB	SB	FST	SS	SSB	SB	FST
DIMENSION D	14.8 ± 0.8 [0.583 ± 0.031]				14.8 ± 0.8 [0.583 ± 0.031]				22.3 ± 1.3 [0.878 ± 0.051]				22.3 ± 1.3 [0.878 ± 0.051]			
L	62 ± 2 [2.441 ± 0.079]				100 ± 2 [3.937 ± 0.079]				100 ± 2 [3.937 ± 0.079]				165 ± 2 [6.496 ± 0.079]			
a ± 2 [a ± 0.079]	50 [1.969]	51 [2.008]	51 [2.008]	48 [1.890]	86 [3.386]	87 [3.425]	87 [3.425]	84 [3.307]	71 [2.795]				136 [5.354]			
b	4 [0.157]	5 [0.197]	5 [0.197]	6.3 [0.248]	4 [0.157]	5 [0.197]	5 [0.197]	6.3 [0.248]	8 [0.315]	8 [0.315]	8 [0.315]	6.3 [0.248]	8 [0.315]	8 [0.315]	8 [0.315]	6.3 [0.248]
b ₁	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]
c	20.5 [0.807]	13 [0.512]	23 [0.906]	23.5 [0.925]	20.5 [0.807]	13 [0.512]	23 [0.906]	23.5 [0.925]	18.5 [0.728]	18.5 [0.728]	29.5 [1.161]	27 [1.063]	18.5 [0.728]	18.5 [0.728]	29.5 [1.161]	27 [1.063]
d	5.5 [0.217]	5.5 [0.217]	5.5 [0.217]	5.5 [0.217]	5.5 [0.217]	5.5 [0.217]	5.5 [0.217]	5.5 [0.217]	10 [0.394]	10 [0.394]	10 [0.394]	10 [0.394]	10 [0.394]	10 [0.394]	10 [0.394]	10 [0.394]
e	2 [0.079]	M3 × 12	M3 × 12	-	2 [0.079]	M3 × 12	M3 × 12	-	M4 × 16	M4 × 18	M4 × 16	-	M4 × 16	M4 × 18	M4 × 16	-
e ₁	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]
k	4 [0.157]	3 [0.118]	3 [0.118]	3 [0.118]	5 [0.197]	4 [0.157]	4 [0.157]	4 [0.157]	10.5 [0.413]	10.5 [0.413]	10.5 [0.413]	10.5 [0.413]	10.5 [0.413]	10.5 [0.413]	10.5 [0.413]	10.5 [0.413]
MASS (g)	25				33				80				113			

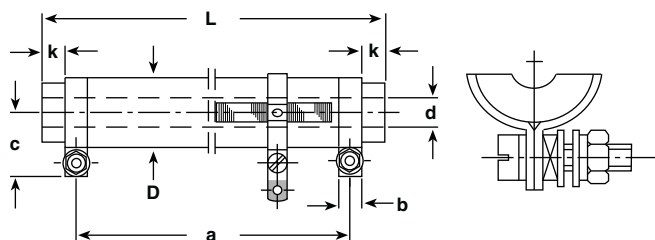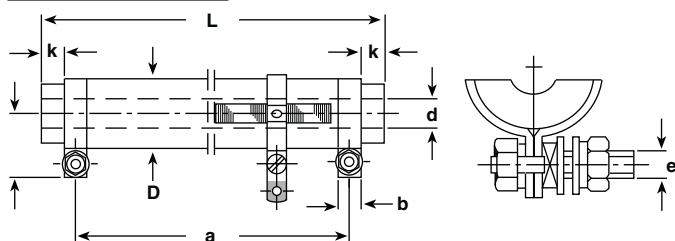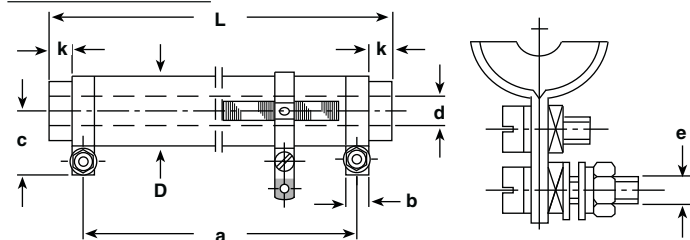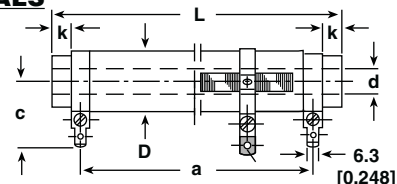DIMENSIONS (continued)**SS TERMINALS****SSB TERMINALS****SB TERMINALS****FST TERMINALS**

from ZWS 50

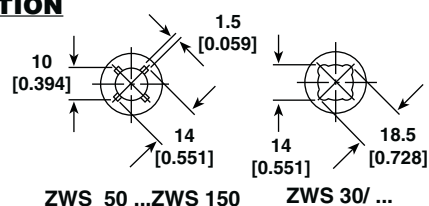
FST A 6.3 mm [0.248]/DIN 46244
(At end terminals only)**CORE SECTION**

ZWS 50 ...ZWS 150








ZWS 30/ ...

ADJUSTABLE LUGS

from ZWS 12 E



MODEL	DIMENSIONS in millimeters [inches]															
	ZWS 150 ZWS 150 E ZWS 150 Ni				ZWS 250 ZWS 250 E ZWS 250 Ni				ZWS 30/100 ZWS 30/100 E ZWS 30/100 Ni				ZWS 30/133 ZWS 30/133 E ZWS 30/133 Ni			
TERMINAL	SS	SSB	SB	FST	SS	SSB	SB	FST	SS	SSB	SB	FST	SS	SSB	SB	FST
DIMENSION D	22.3 ± 1.3 [0.878 ± 0.051]				32.3 ± 1.5 [1.28 ± 0.059]				32.3 ± 1.5 [1.28 ± 0.059]				32.3 ± 1.5 [1.28 ± 0.059]			
L	265 ± 4 [10.433 ± 0.079]				330 ± 5 [12.992 ± 0.197]				100 ± 2.5 [3.937 ± 0.098]				133 ± 3 [5.236 ± 0.118]			
a	236 [9.291]				280 [11.024]				85 [3.346]				118 [4.646]			
b	8 [0.315]	8 [0.315]	8 [0.315]	6.3 [0.248]	8 [0.315]	8 [0.315]	8 [0.315]	6.3 [0.248]	8 [0.315]	8 [0.315]	8 [0.315]	6.3 [0.248]	8 [0.315]	8 [0.315]	8 [0.315]	6.3 [0.248]
b ₁	5 [0.197]	5 [0.197]	5 [0.197]	5 [0.197]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]	8 [0.315]
c	18.5 [0.728]	18.6 [0.732]	29.5 [1.161]	27 [1.063]	23.5 [0.925]	23.5 [0.925]	35 [1.378]	31.5 [1.24]	23.5 [0.925]	23.5 [0.925]	35 [1.378]	31.5 [1.24]	23.5 [0.925]	23.5 [0.925]	35 [1.378]	31.5 [1.24]
d	10 [0.394]	10 [0.394]	10 [0.394]	10 [0.394]	20 [0.787]	20 [0.787]	20 [0.787]	20 [0.787]	14 [0.551]	14 [0.551]	14 [0.551]	14 [0.551]	14 [0.551]	14 [0.551]	14 [0.551]	14 [0.551]
e	M4 × 16	M4 × 18	M4 × 16	-	M4 × 16	M4 × 18	M4 × 16	-	M4 × 16	M4 × 18	M4 × 16	-	M4 × 16	M4 × 18	M4 × 16	-
e ₁	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	3.2 [0.126]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]	4.2 [0.165]
k	10.5 [0.413]	10.5 [0.413]	10.5 [0.413]	10.5 [0.413]	21 [0.827]	21 [0.827]	21 [0.827]	21 [0.827]	3.5 [0.138]	3.5 [0.138]	3.5 [0.138]	3.5 [0.138]	3.5 [0.138]	3.5 [0.138]	3.5 [0.138]	3.5 [0.138]
MASS (g)	194				375				167				212			

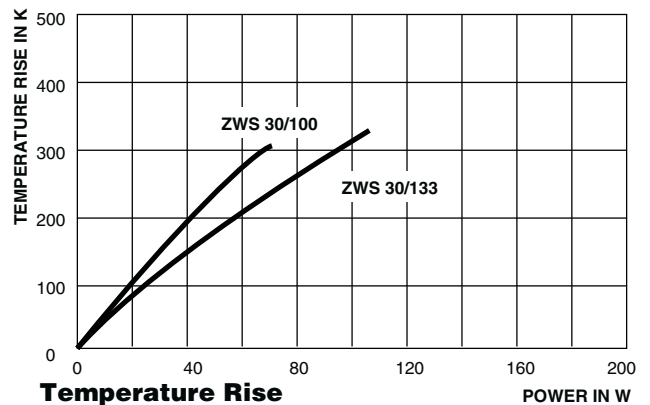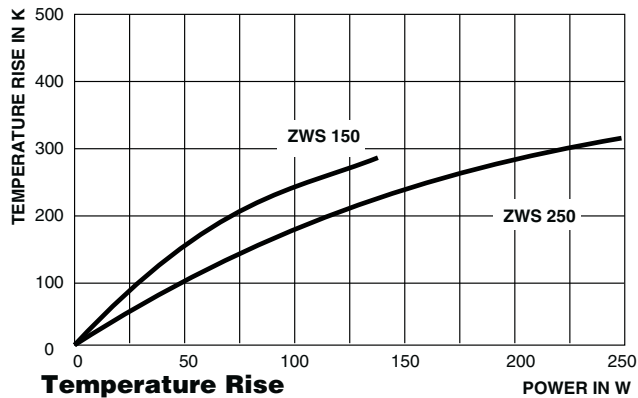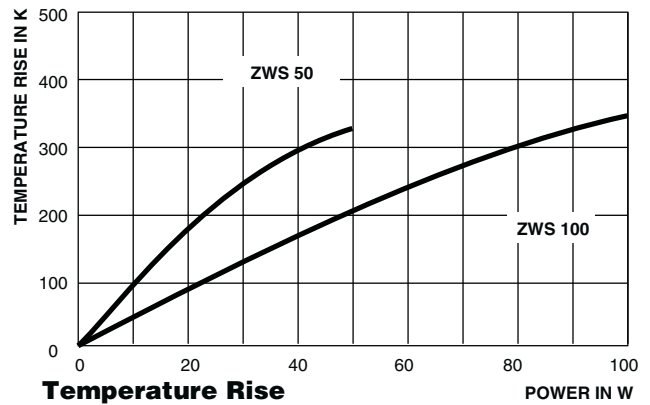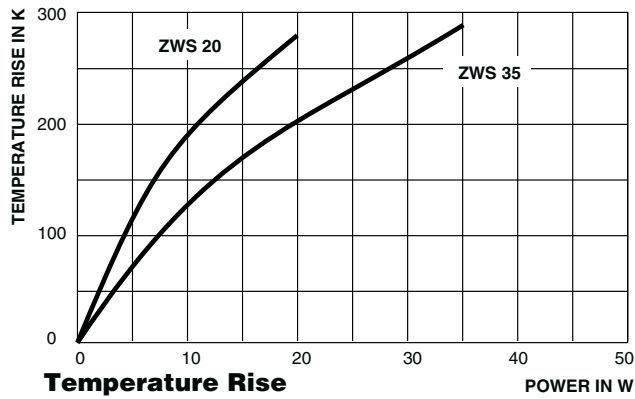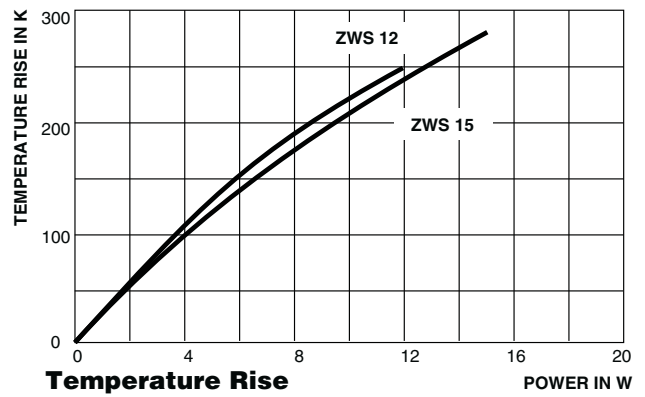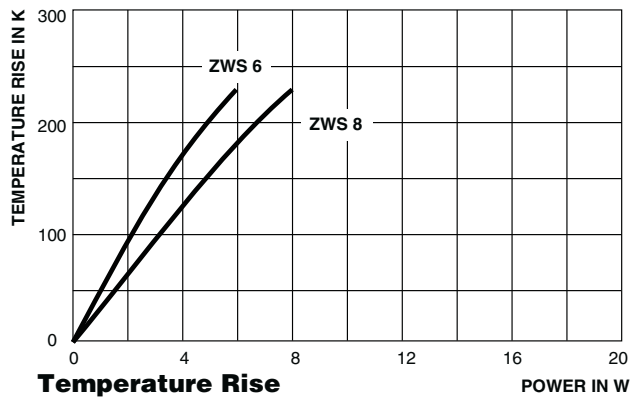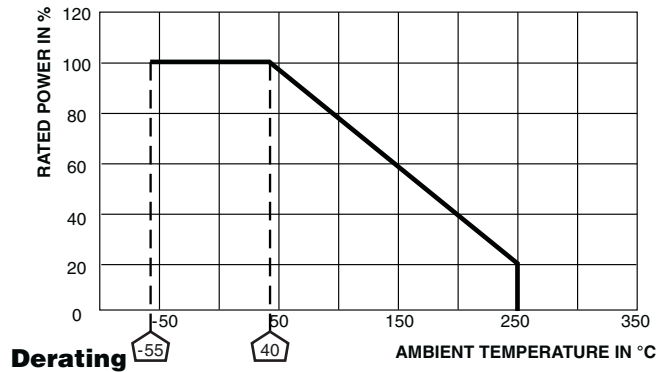



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.