Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

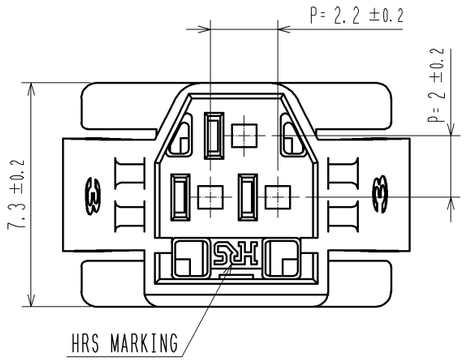

7 MATING FIGURE (PANEL MOUNTED)

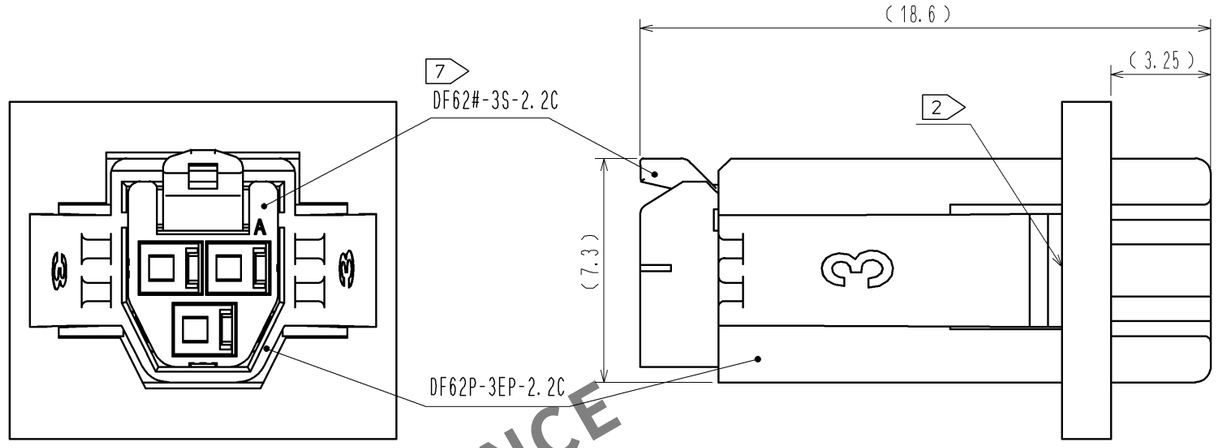

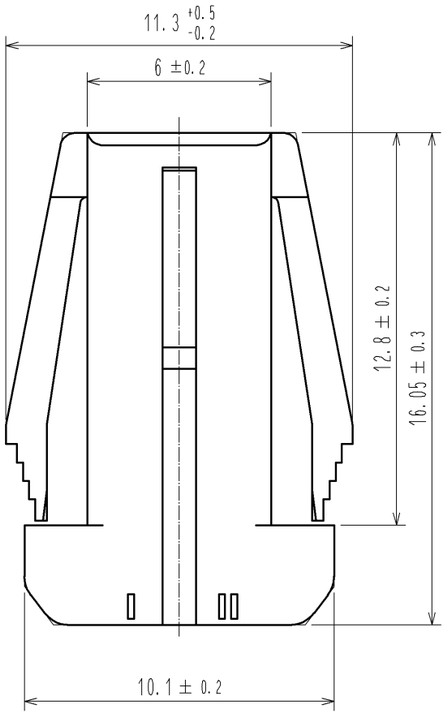

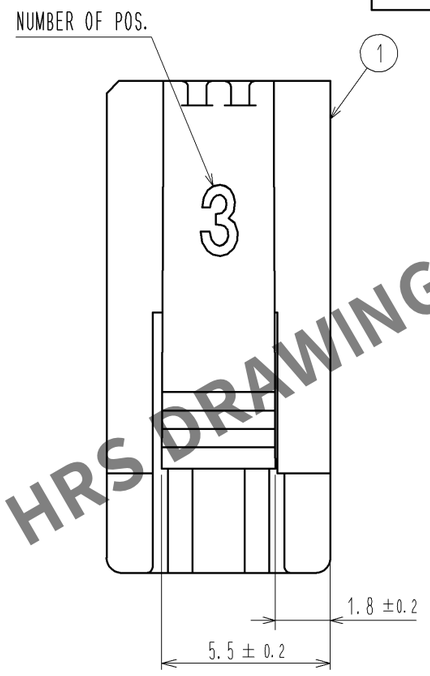

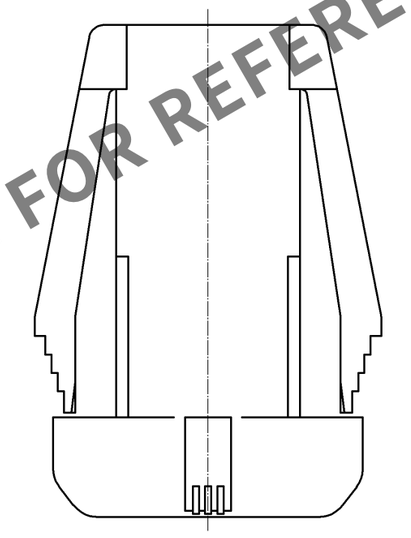

3 4 RECOMMENDED PANEL CUTOUT DIMENSION

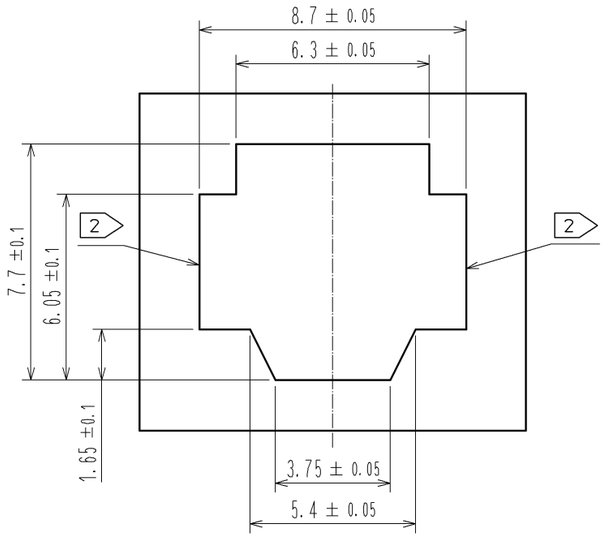

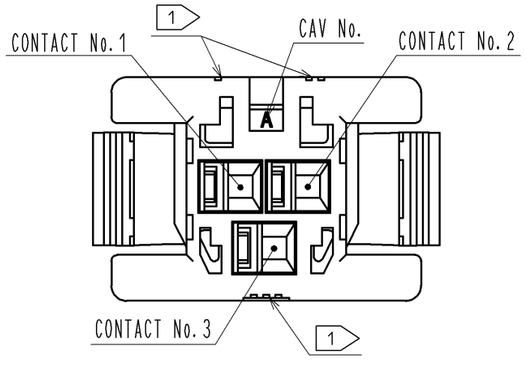

1 FIGURE-1 CONTACT No. MARKING (10:1)

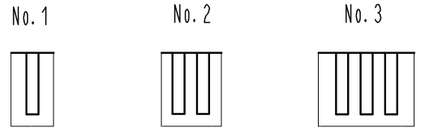

NOTE.
1. 1 MARKINGS AT THE INDICATED POSITIONS ARE CONTACT NO. MARKING. AND SHAPES ARE SHOWN IN FIGURE-1.
2. 2 PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
3. 3 APPLICABLE PANEL THICKNESSING IS 2.3 TO 0.5mm.
4. 4 CONSULT HIROSE FOR THE OTHER PANEL CUTOUT DESIGNS THAN THE RECOMMENDED ONE.
5. PER PACK : 100 PIECES.
6. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
7. 7 THIS FIGURE SHOWS THE MATED CONDITION WITH DF62B-3S-2.2C.

NO.	MATERIAL	FINISH , REMARKS
1	PBT	UL94V-0(BLACK)

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1					

HIROSE ELECTRIC CO., LTD.

APPROVED	KI. AKIYAMA	13. 12. 26
CHECED	OM. MIYAMOTO	13. 12. 26
DESIGNED	TH. YOSHIZAWA	13. 12. 26
DRAWN	MI. SAKIMURA	13. 12. 20

DRAWING NO.	EDC3-349136-00
PART NO.	DF62P-3EP-2.2C
CODE NO.	CL544-0544-4-00

1/1

HRS DRAWING FOR REFERENCE