


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

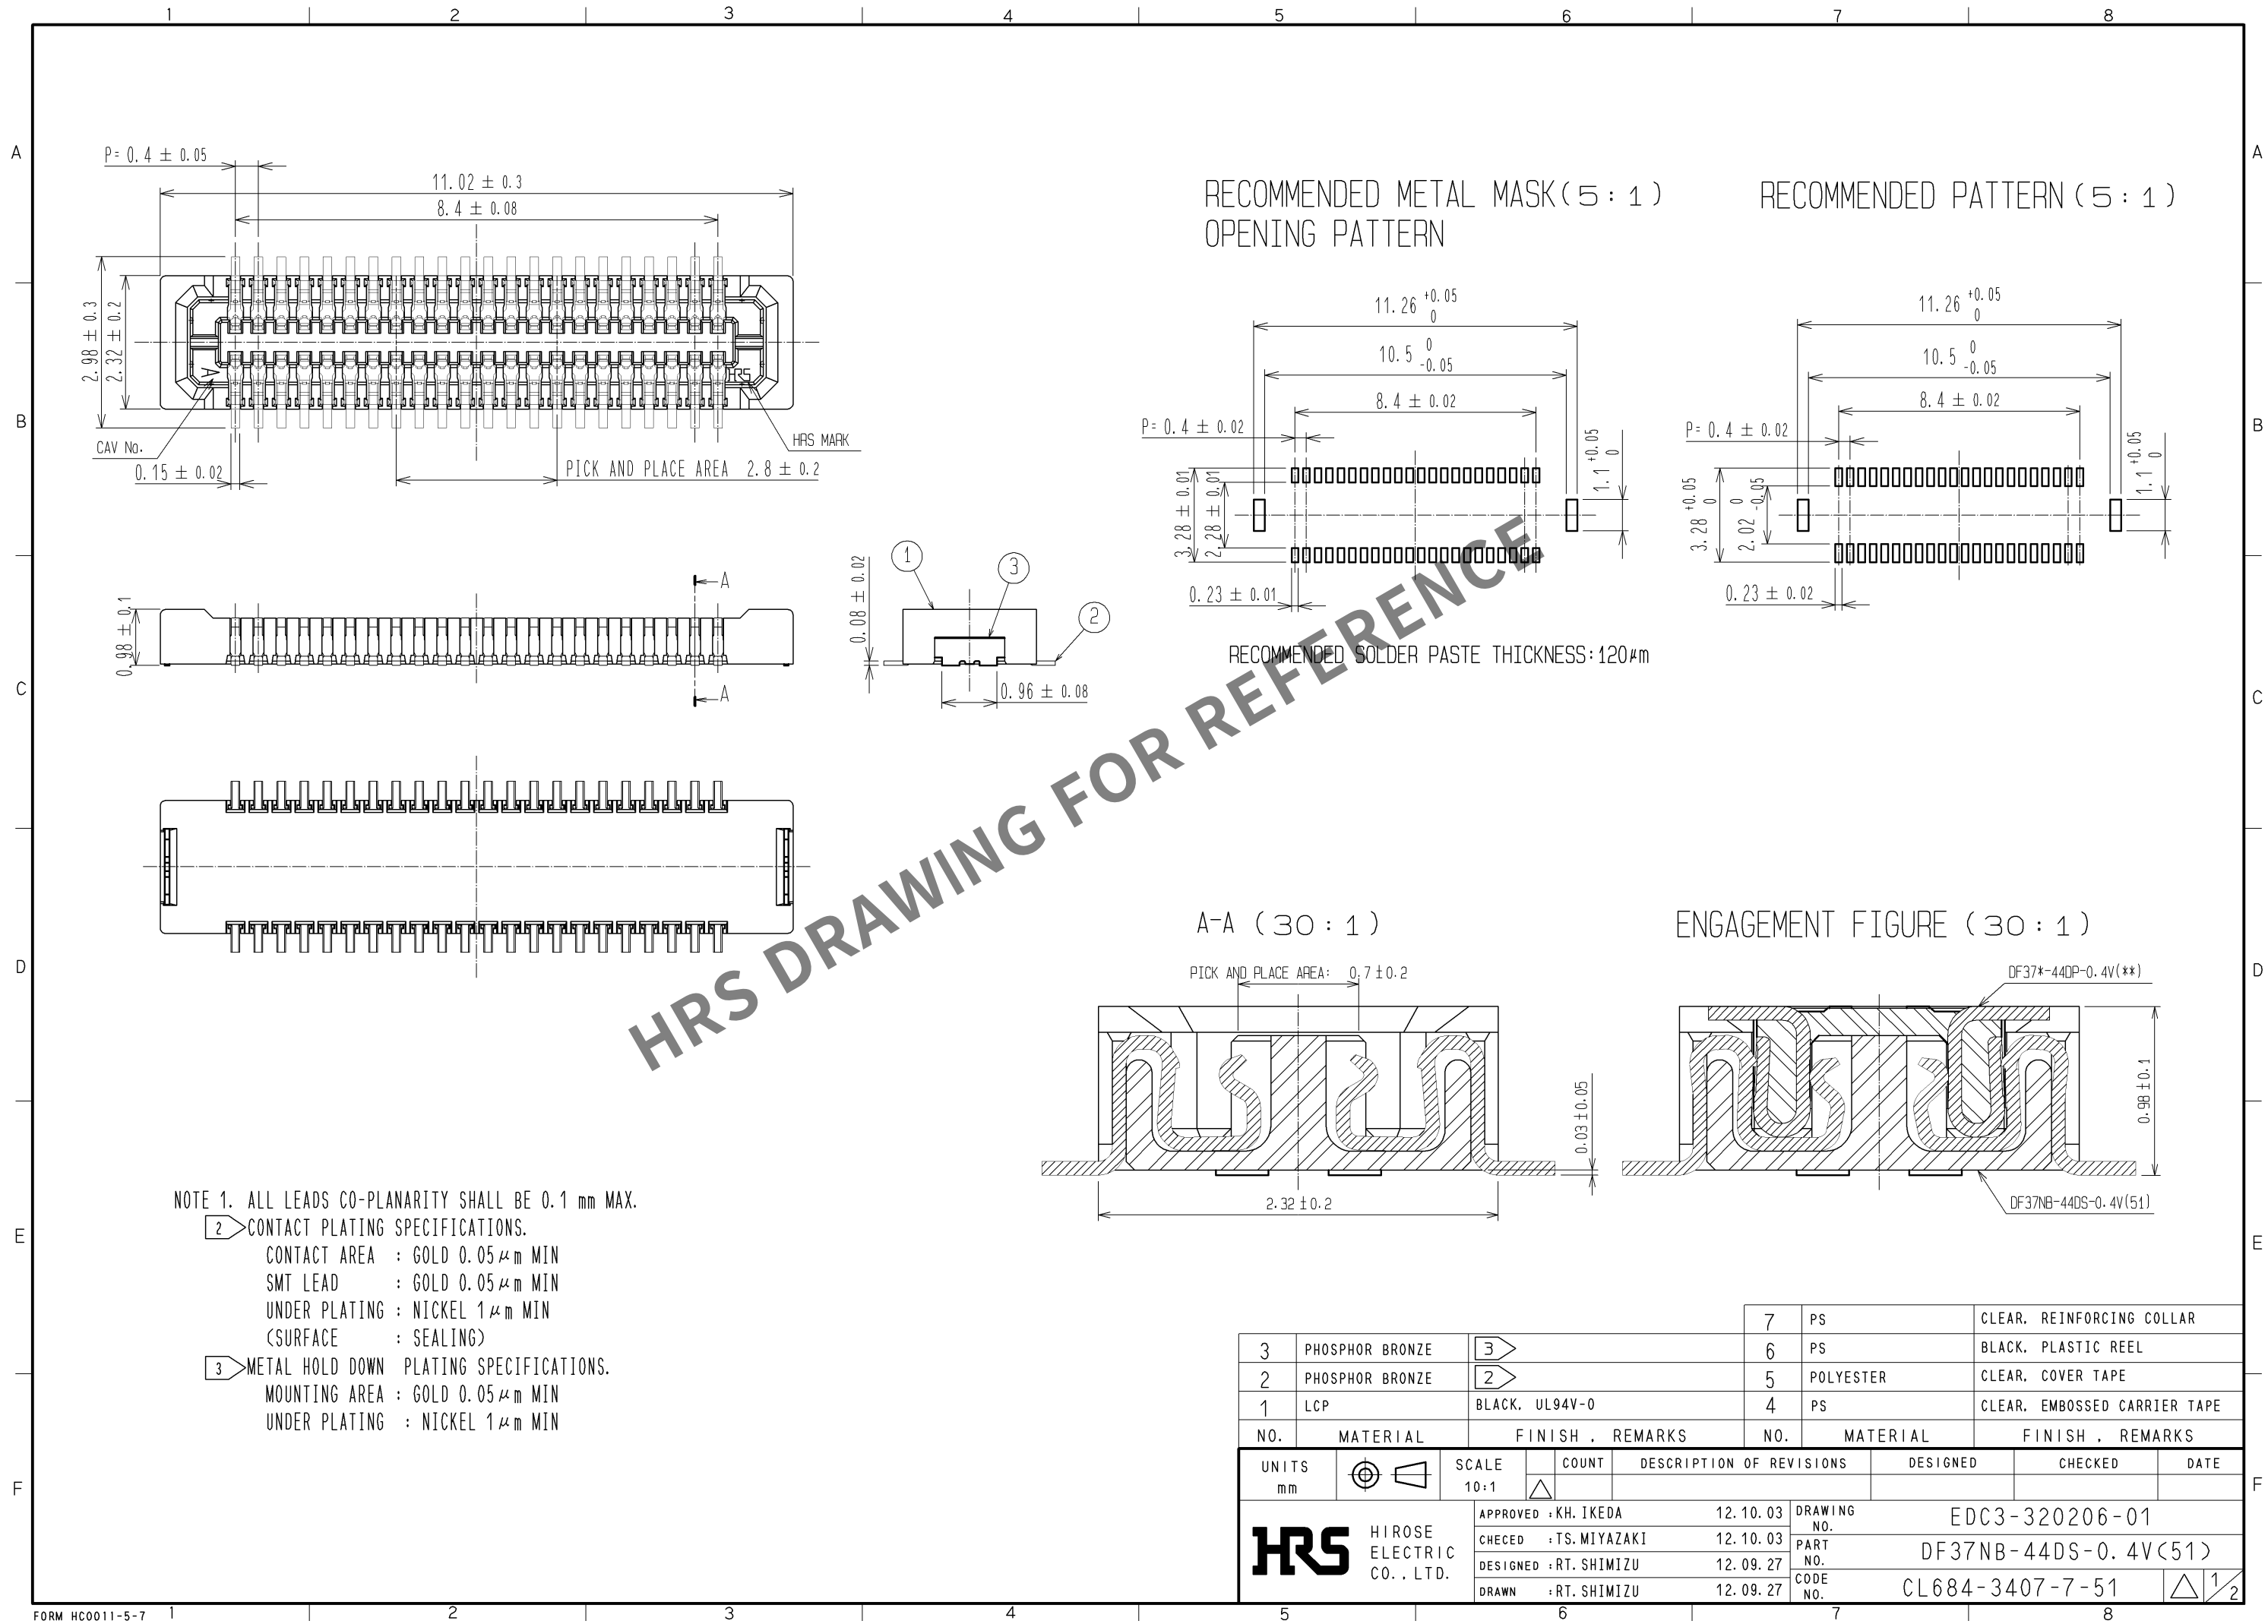

NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 mm MAX.

2 CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05 μm MIN
SMT LEAD : GOLD 0.05 μm MIN
UNDER PLATING : NICKEL 1 μm MIN
(SURFACE : SEALING)

3 METAL HOLD DOWN PLATING SPECIFICATIONS.
MOUNTING AREA : GOLD 0.05 μm MIN
UNDER PLATING : NICKEL 1 μm MIN

3	PHOSPHOR BRONZE	3	7	PS	CLEAR, REINFORCING COLLAR
2	PHOSPHOR BRONZE	2	6	PS	BLACK, PLASTIC REEL
1	LCP	BLACK, UL94V-0	5	POLYESTER	CLEAR, COVER TAPE
NO.	MATERIAL	FINISH, REMARKS	4	PS	CLEAR, EMBOSSED CARRIER TAPE
UNITS	mm	SCALE	10:1	COUNT	DESCRIPTION OF REVISIONS
APPROVED	: KH. IKEDA	12.10.03	DRAWING	NO.	EDC3-320206-01
CHECKED	: TS. MIYAZAKI	12.10.03	PART	NO.	DF37NB-44DS-0.4V(51)
DESIGNED	: RT. SHIMIZU	12.09.27	CODE	NO.	CL684-3407-7-51
DRAWN	: RT. SHIMIZU	12.09.27			

