
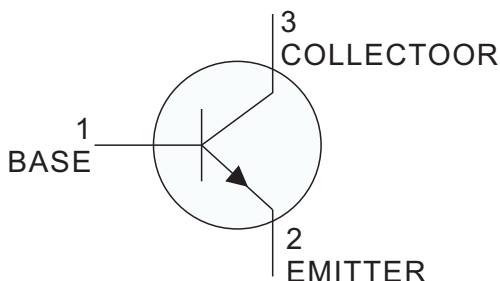


FEATURES

- Complementary to S9015

SOT-23



DEVICE MARKING
S9014 = J6

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	45	Vdc
Collector–Base Voltage	V_{CBO}	50	Vdc
Emitter–Base Voltage	V_{EBO}	5.0	Vdc
Collector Current — Continuous	I_C	100	mAdc

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR– 5 Board, (1) $T_A = 25^\circ\text{C}$	P_D	200	mW
Junction and Storage Temperature	T_J, T_{stg}	– 55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

OFF CHARACTERISTICS

Characteristic	Symbol	Min	Max	Unit
Collector–Emitter Breakdown Voltage(3) ($I_C = 0.1 \text{ mAdc}$, $I_E = 0$)	$V_{(BR)CEO}$	45	–	Vdc
Collector–Base Breakdown Voltage ($I_C = 100 \mu\text{Adc}$, $I_E = 0$)	$V_{(BR)CBO}$	50	–	Vdc
Emitter–Base Breakdown Voltage ($I_E = 100 \mu\text{Adc}$, $I_C = 0$)	$V_{(BR)EBO}$	5.0	–	Vdc
Collector cut-off current ($V_{CB} = 50 \text{ Vdc}$, $I_E = 0$)	I_{CBO}	–	0.1	μAdc
Collector cut-off current ($V_{CE} = 35 \text{ Vdc}$, $I_B = 0$)	I_{CEO}	–	1	μAdc
Emitter cut-off current ($V_{EB} = 3 \text{ Vdc}$, $I_C = 0$)	I_{EBO}	–	0.1	μAdc

1. FR–5 = 1.0 x 0.75 x 0.062 in.

2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.

3. Pulse Test: Pulse Width <300 μs , Duty Cycle <2.0%.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)
ON CHARACTERISTICS (3)

Characteristic	Symbol	Min	Max	Unit
DC Current Gain	h _{FE}			—
(I _C = 1.0 mA _{DC} , V _{CE} = 5 V _{DC})		200	1000	
Collector–Emitter Saturation Voltage	V _{CE(sat)}			V _{DC}
(I _C = 100 mA _{DC} , I _B = 5 mA _{DC})(3)		—	0.3	
Base–Emitter Saturation Voltage(3)	V _{BE(sat)}			V _{DC}
(I _C = 100 mA _{DC} , I _B = 5 mA _{DC})		—	1.0	

SMALL–SIGNAL CHARACTERISTICS

Current–Gain — Bandwidth Product (I _C = 10 mA _{DC} , V _{CE} = 5.0 V _{DC} , f = 30 MHz)	f _T	150	—	MHz
---	----------------	-----	---	-----

CLASSIFICATION OF h_{FE}

Rank	L	H
Range	200-450	450-1000

3. Pulse Test: Pulse Width <300 μs, Duty Cycle <2.0%.

TYPICAL CHARACTERISTICS

Fig.1 Power Derating Curve

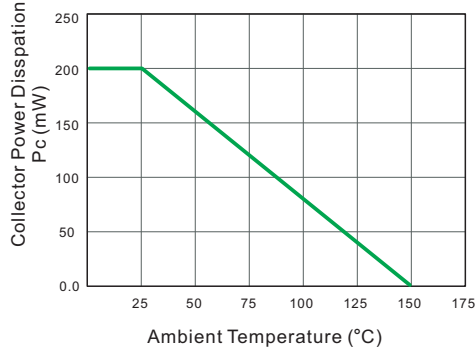


Fig.2 Static characteristics

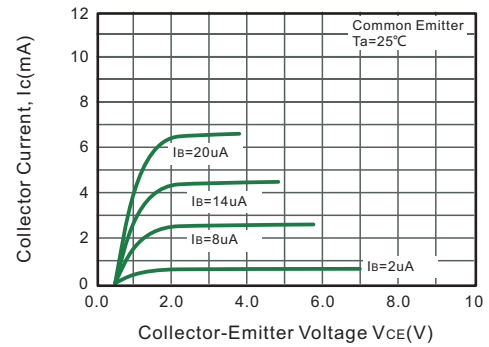


Fig.3 h_{FE} -- I_c

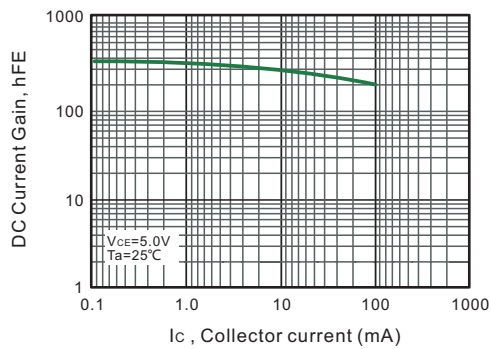


Fig.4 I_c -- V_{BE}

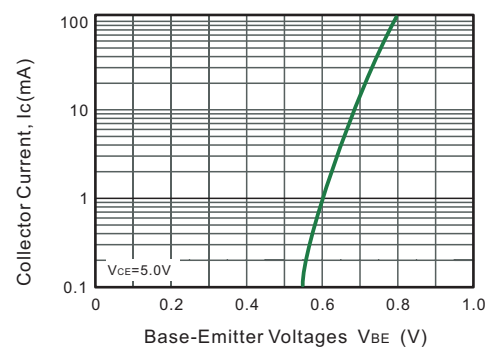


Fig.5 V_{BEsat} -- I_c

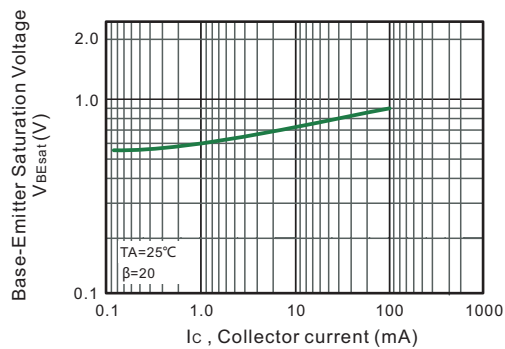


Fig.6 V_{CEsat} -- I_c

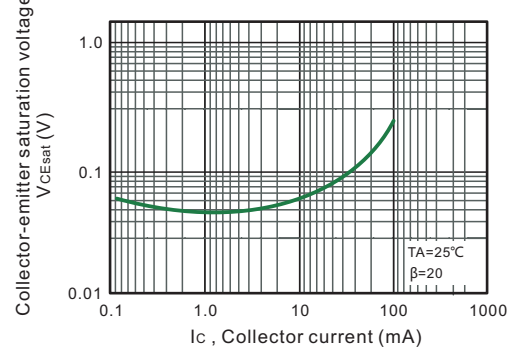


Fig.7 f_T -- I_c



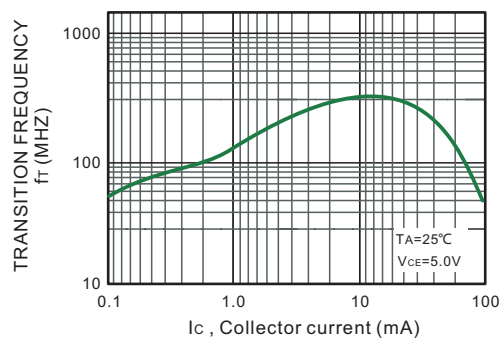


Fig.8 C_{ob}/C_{ib} -- V_{CB}/V_{EB}

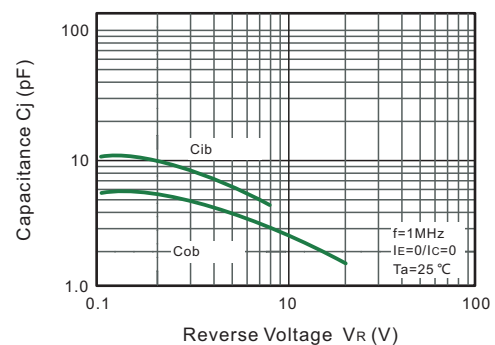


SOT-23 Package Outline Dimensions

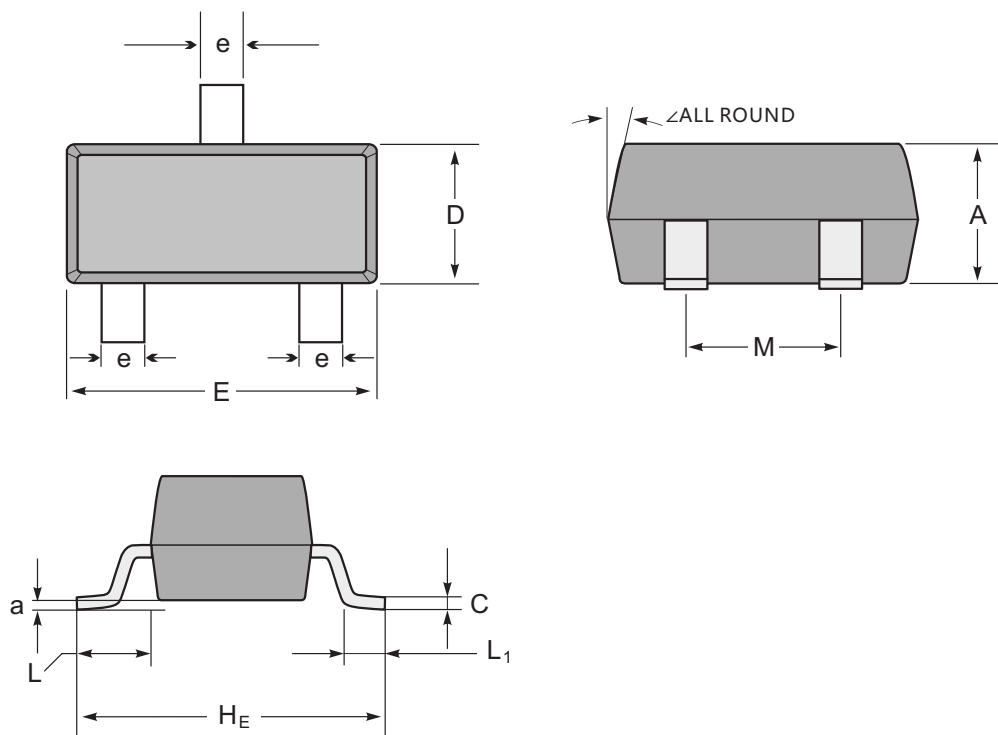

SOT-23 mechanical data

UNIT		A	C	D	E	HE	e	M	L	L ₁	a	∠
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0	12°
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15	
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0	
	min	35	3	47	110	87	12	67			6	

The recommended mounting pad size

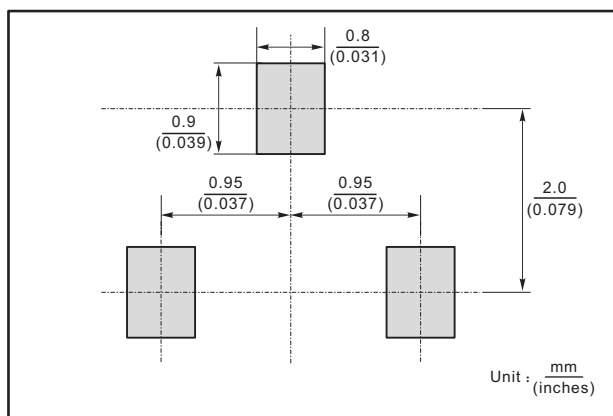


Marking


Type number	Marking code
S9014	J6

SOT-23 Packing

1.The method of packaging and dimension are shown as below figure. (Dimension in mm)

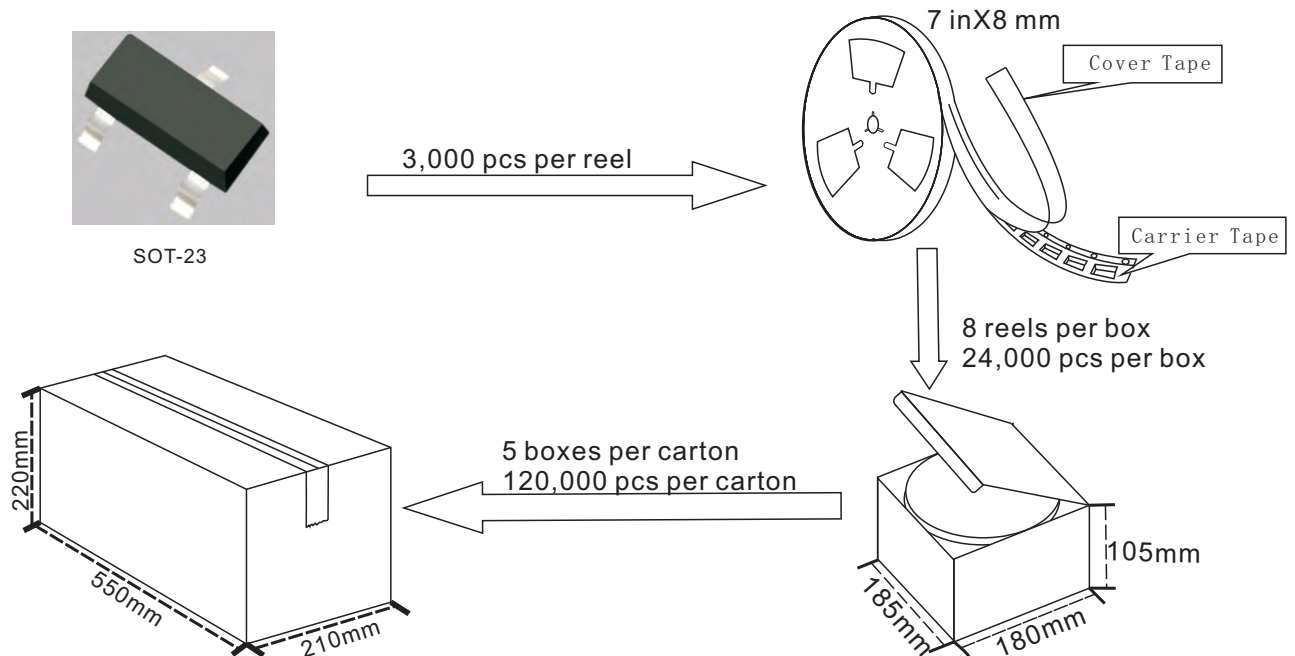

SOT-23 Embossed Carrier Tape

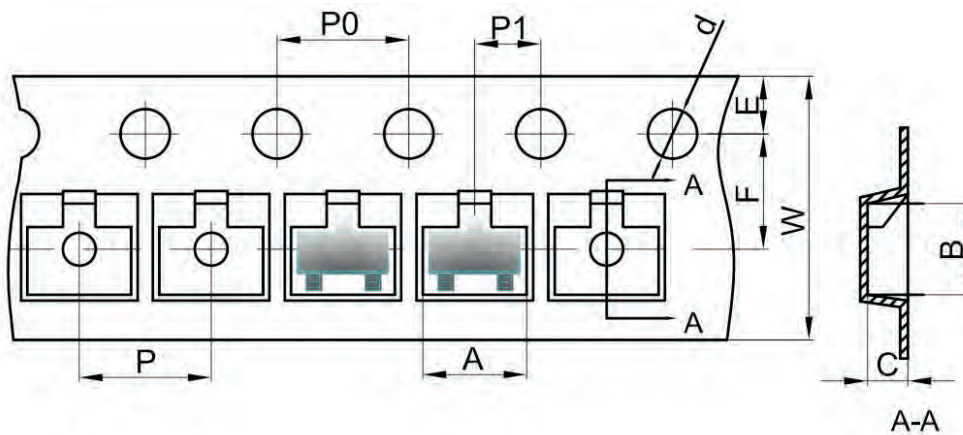

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

