



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

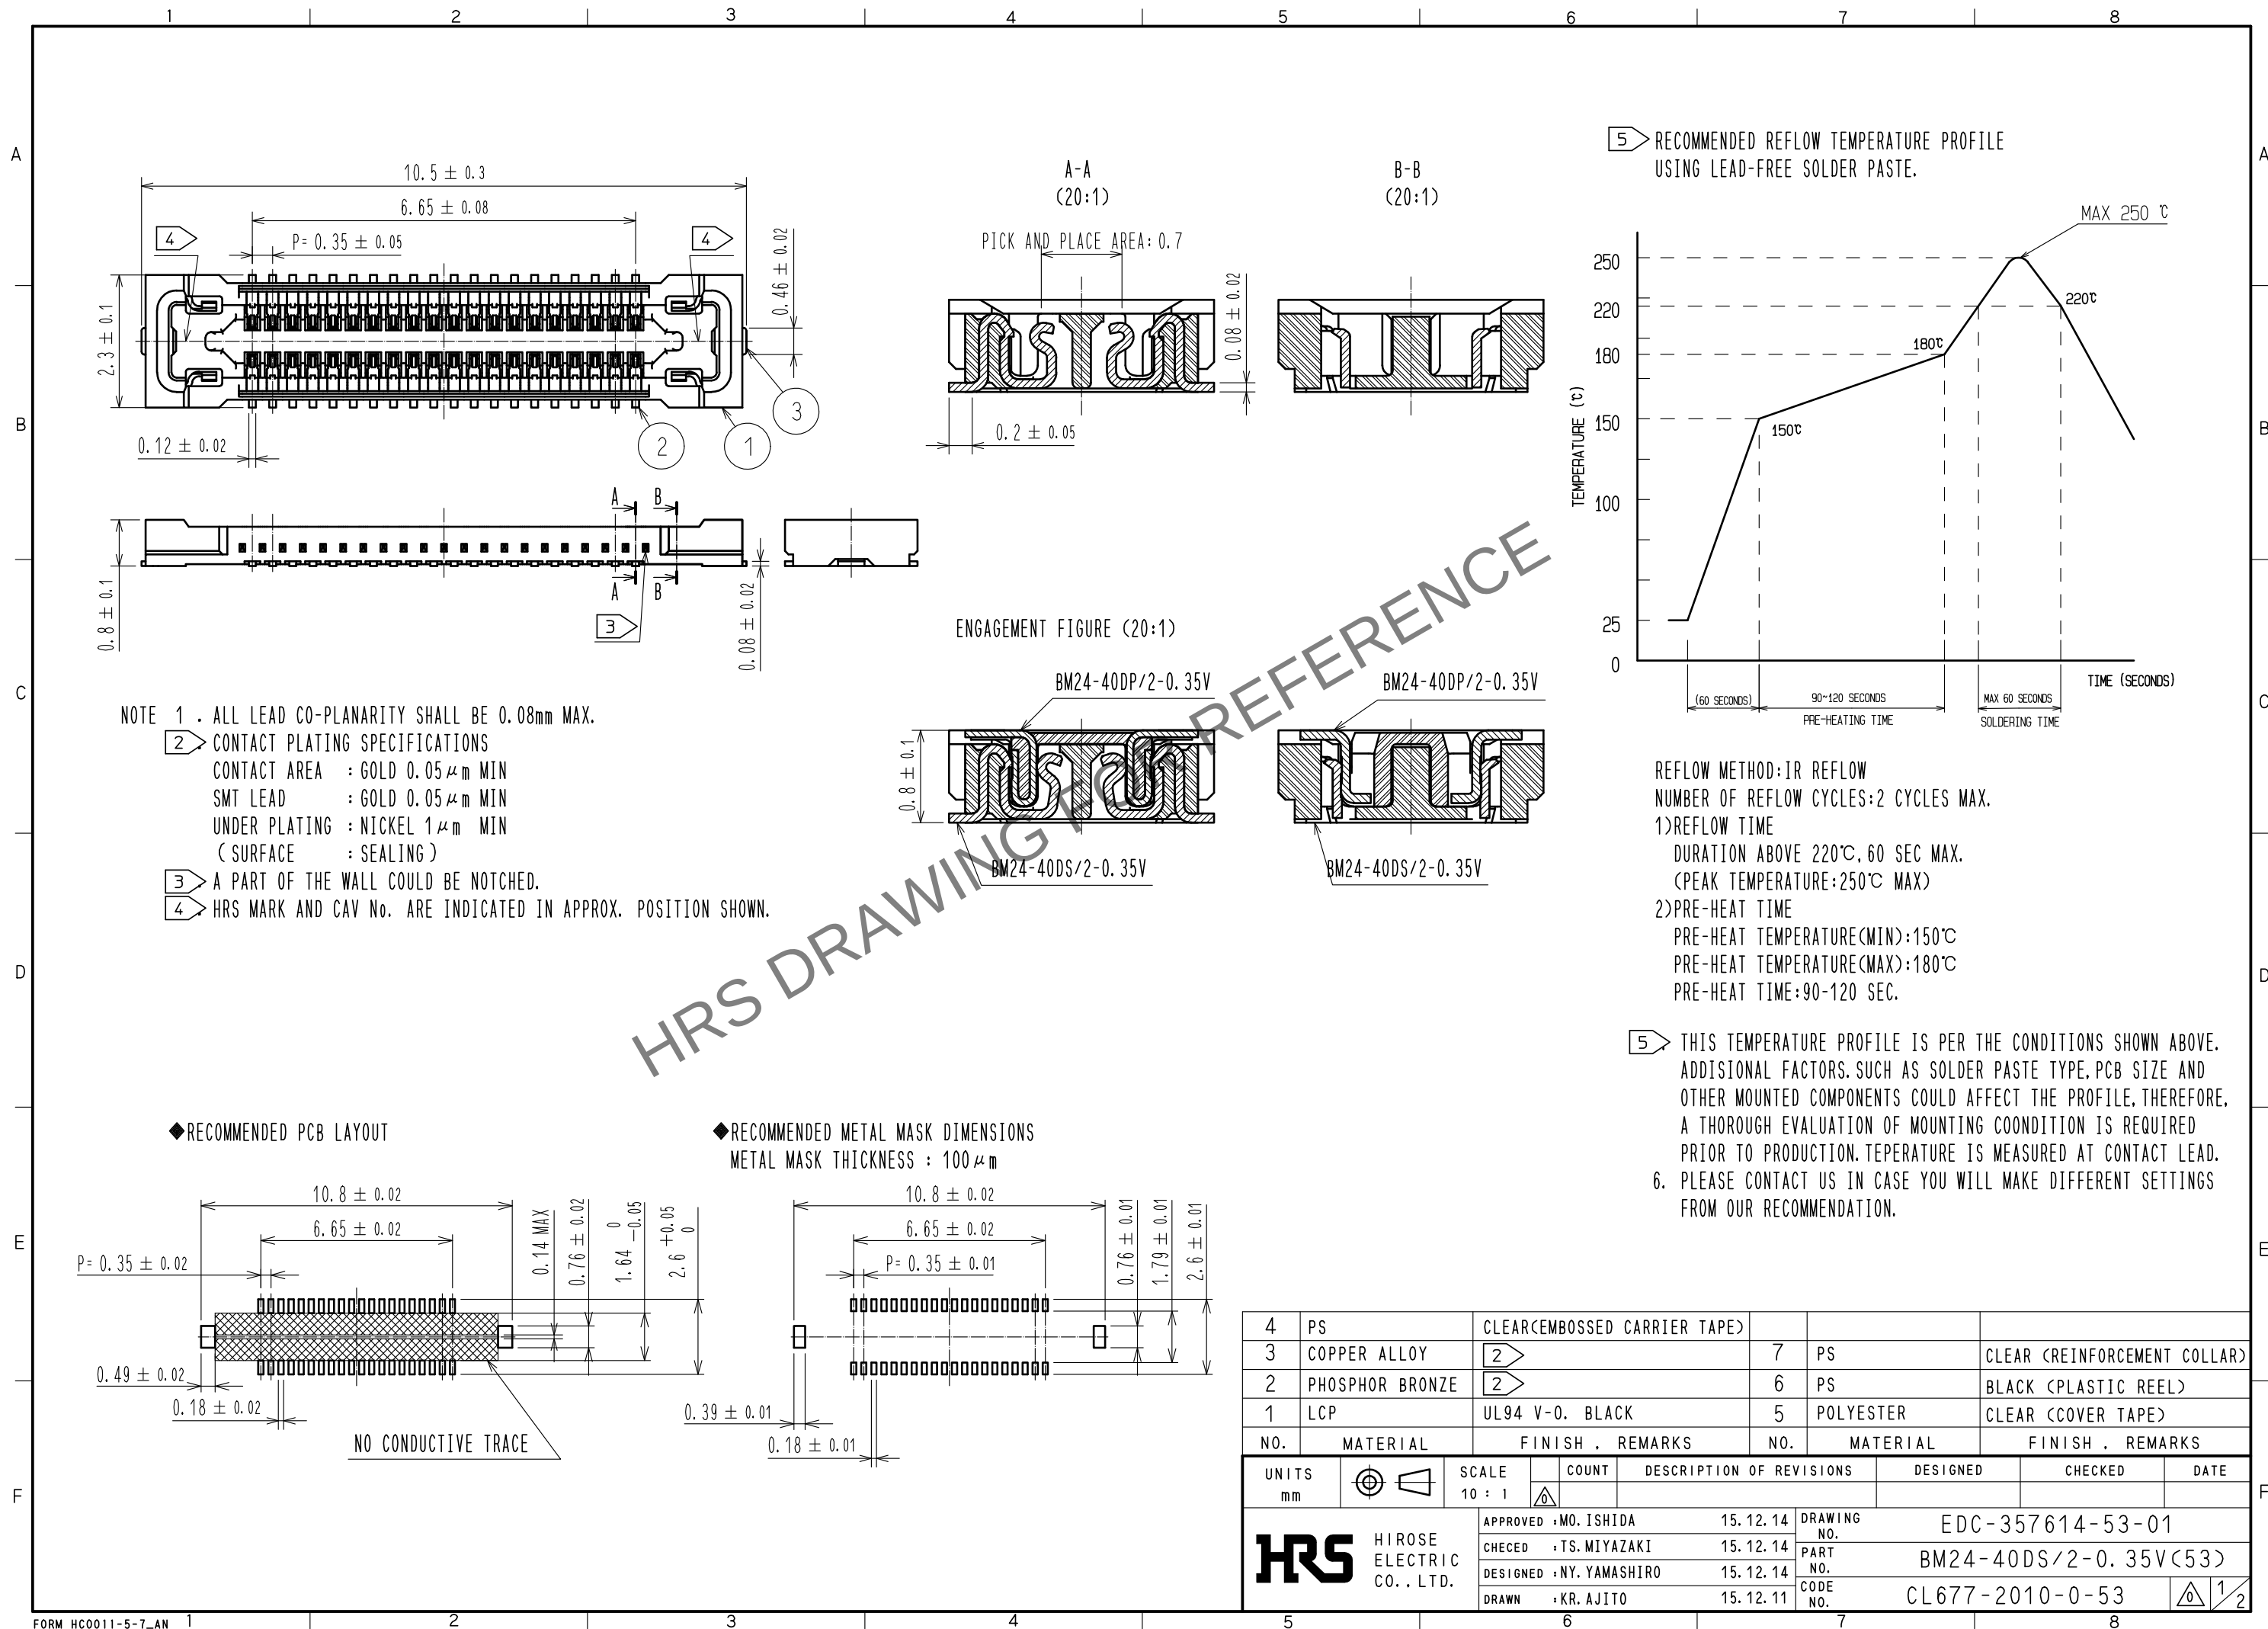


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



## EMBOSSED CARRIER TAPE PACKAGING (FREE)

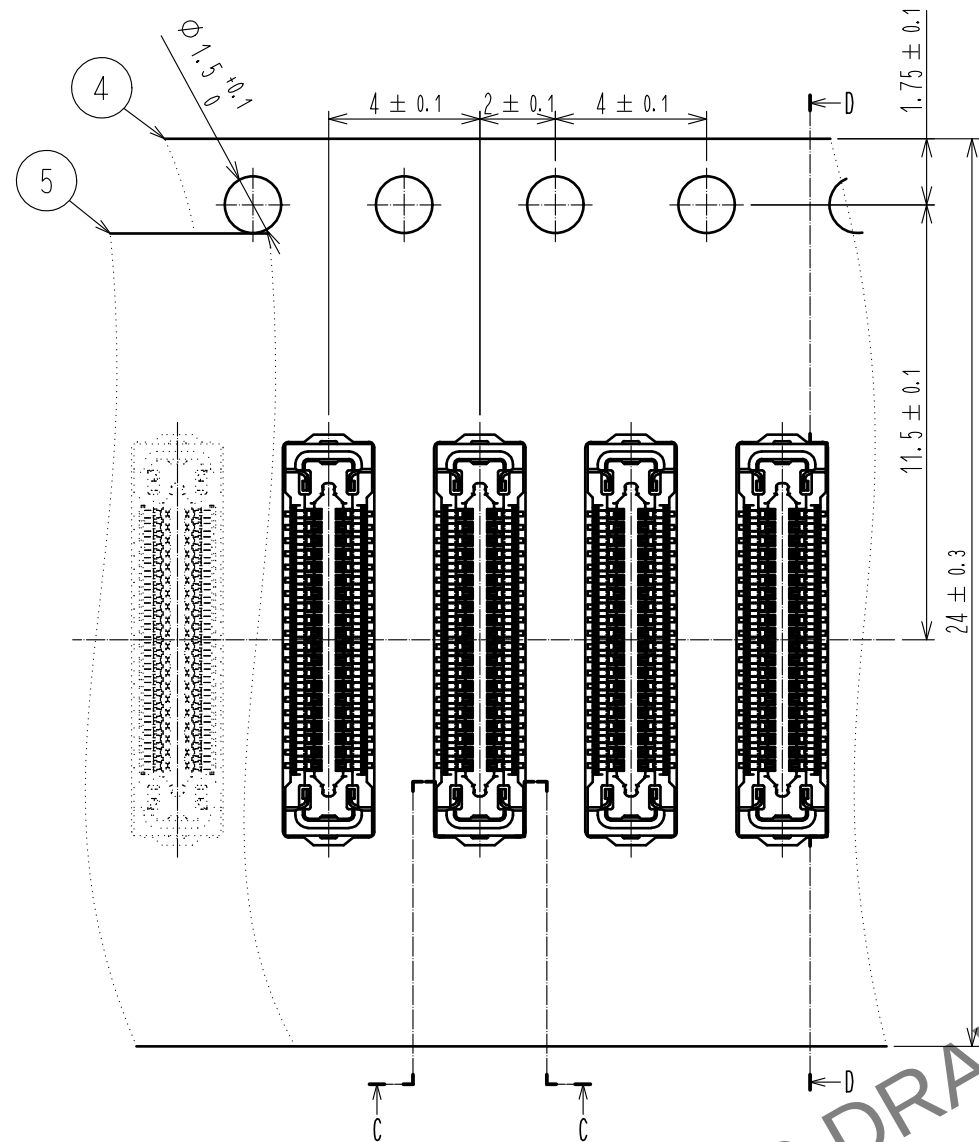

C-C (5:1)




DIRECTION OF UNREELING

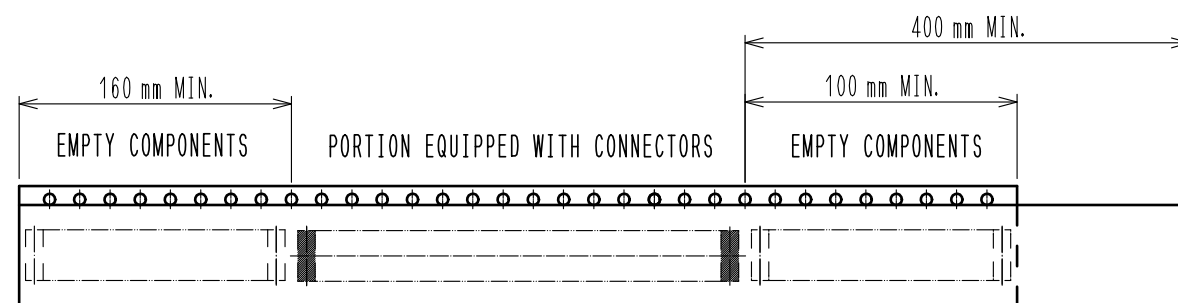


9 TAPING (FREE)

LEADER


D-D (5:1)

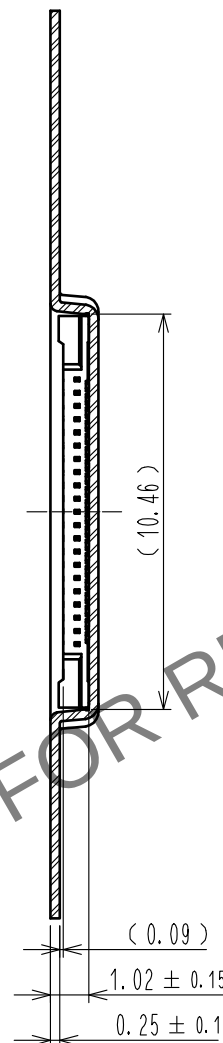

## STYLE AND DIMENTION OF REEL (FREE)

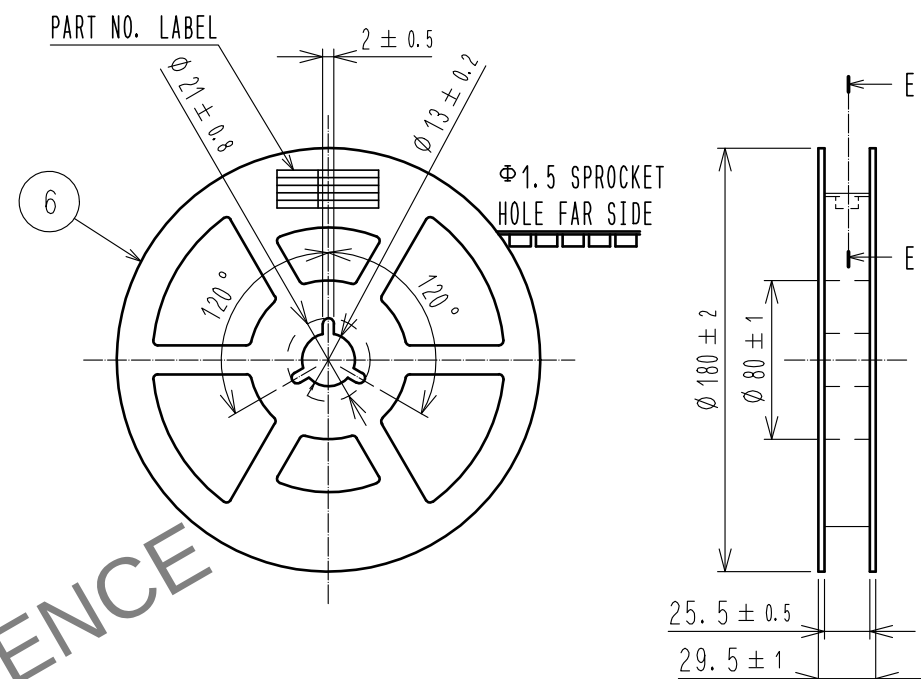

E-E (FREE)

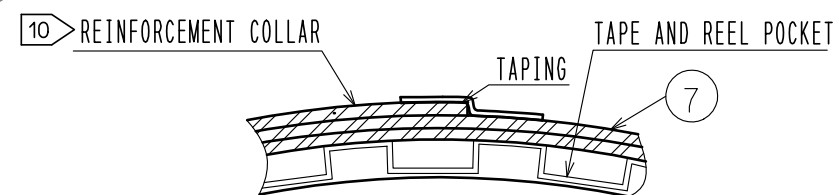

## DETAIL OF PART NO. LABEL

|       |                       |
|-------|-----------------------|
| 製造年月日 | ** ** *               |
| 製品コード | CL0677-2010-0(53)     |
| 製品名   | BM24-40DS/2-0.35V(53) |
| 数量    | 1.000                 |
| 納入者   | ヒロセ電機(株)              |

DATA OF MANUFACTURED  
CODE NO.  
PART NO.  
QUANTITY  
SUPPLIER

7 . PER REEL 1,000 CONNECTORS.

8 . THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

9 . REFER TO JIS C 0806, IEC 60286-3(PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)

10 . AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END THE COLLAR.

HRS

|             |                       |
|-------------|-----------------------|
| DRAWING NO. | EDC-357614-53-01      |
| PART NO.    | BM24-40DS/2-0.35V(53) |
| CODE NO.    | CL677-2010-0-53       |

2/2