

SOD-323



MAKING:S31

FEATURES

- I Low current rectifierschottky diode
- I Low voltage, low inductance
- I For power supply





Maximum Ratings and Electrical characteristics, single Diode @Ta=25°C

parameter	symbol	Limit	unit
peak reVerse Voltage	V_{RM}	45	V
Dc reVerse Voltage	V_R	40	V
Mean rectifying current	I_O	0.1	A
Non-repetitiVe peak Forward surge current@t=8.3ms	I_{FSM}	1	A
power dissipation	P_D	200	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	500	°C/W
Operating Junction Temperature Range	T_j	-40 ~ +125	°C
Storage Temperature Range	T_{stg}	-55 ~ +150	°C


Electrical Ratings @Ta=25°C

parameter	symbol	Min	Typ	Max	unit	conditions
Forward Voltage	V_F			0.35	V	$I_F=1mA$
Forward Voltage	V_F			0.45	V	$I_F=10mA$
Forward Voltage	V_F			0.60	V	$I_F=100mA$
ReVerse current	I_R			5	μA	$V_R=40V$
capacitance between terminals	C_T			25	pF	$V_R=0V, f=1MHz$

Typical Characteristics

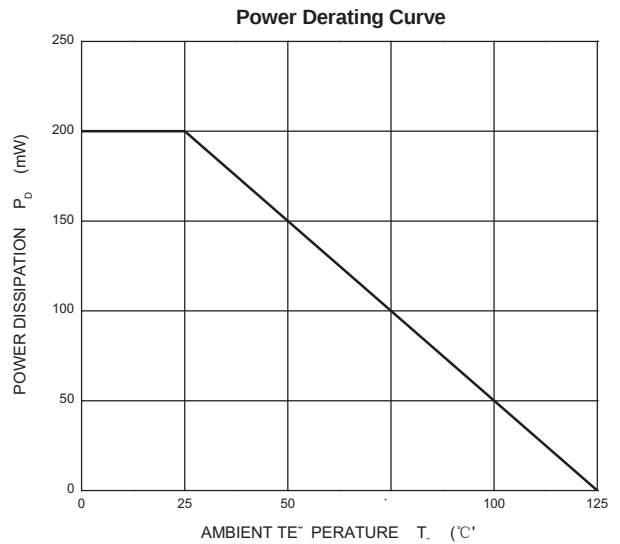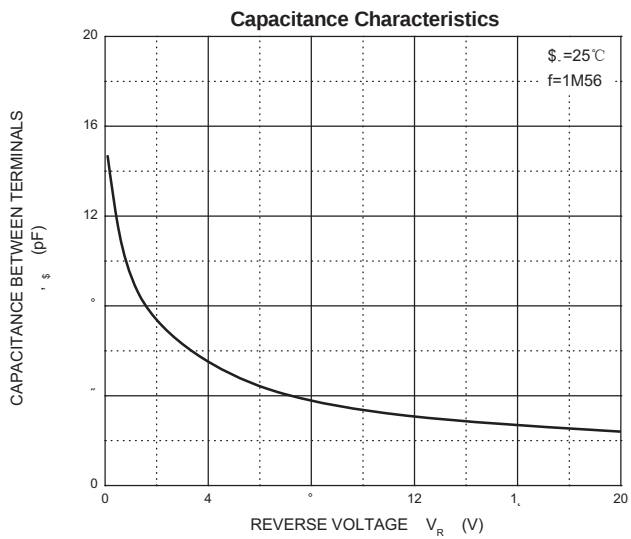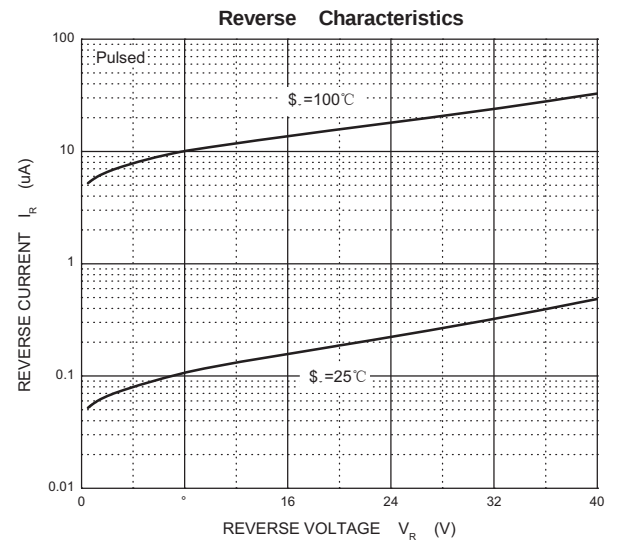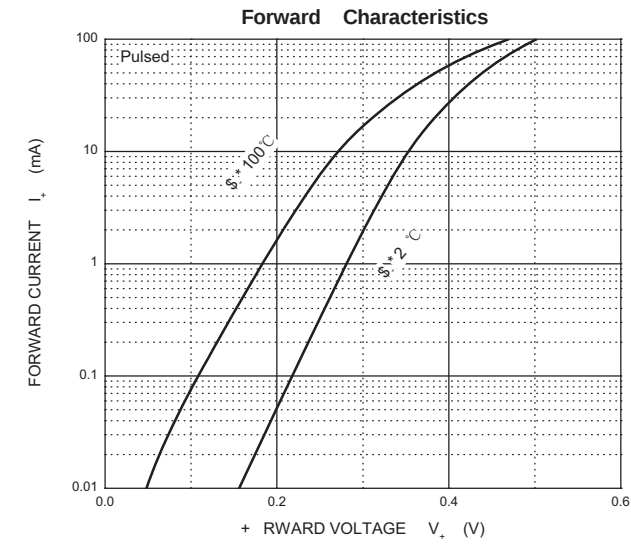


SOD-323 Package Outline Dimensions

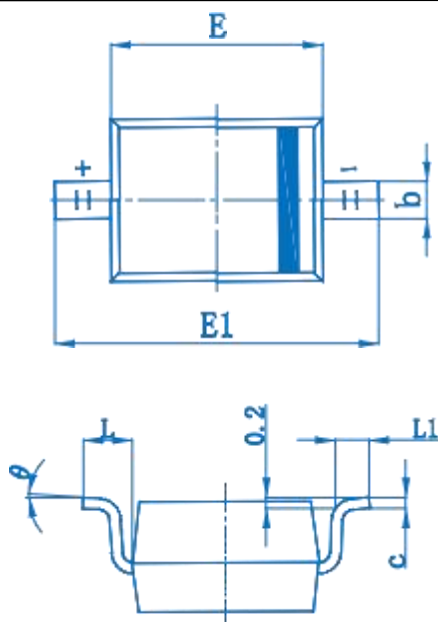

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A		1.100		0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	1.000	0.031	0.039
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.500	2.750	0.098	0.108
L	0.475 REF		0.019 REF	
L1	0.250	0.400	0.010	0.016
θ	0°	8°	0°	8°

SOD-323 Suggested Pad Layout

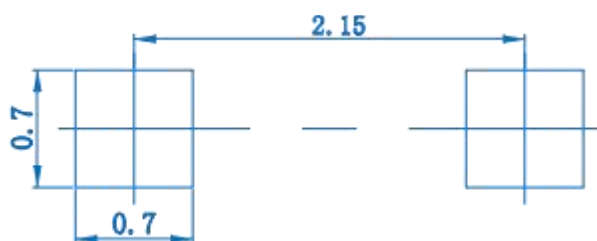

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.