
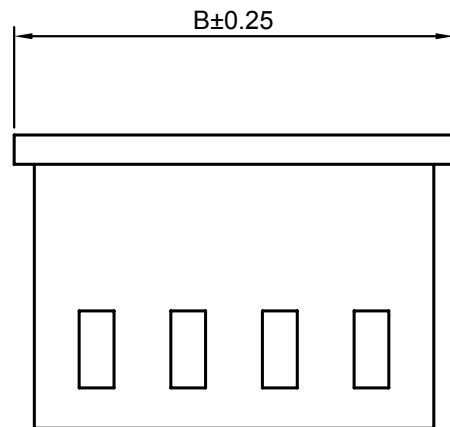


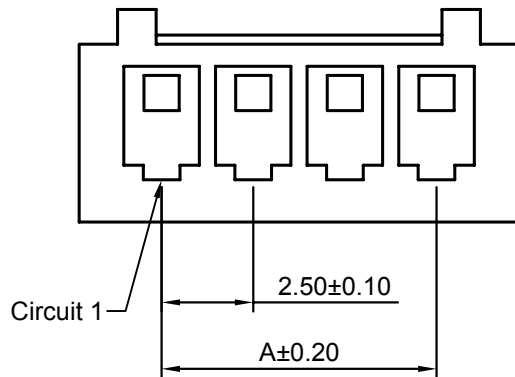

Ordering Information:


A2503H-XP - **
1 2

1.Part No.

2.Color

(blank) :Ivory

WH :White

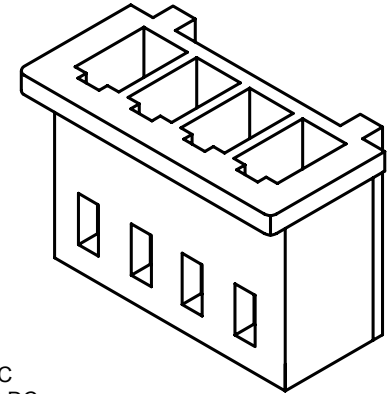

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.00	12P	27.50	32.00
3P	5.00	9.50	13P	30.00	34.50
4P	7.50	12.00	14P	32.50	37.00
5P	10.00	14.50	15P	35.00	39.50
6P	12.50	17.00	16P	37.50	42.00
7P	15.00	19.50	17P	40.00	44.50
8P	17.50	22.00	18P	42.50	47.00
9P	20.00	24.50	19P	45.00	49.50
10P	22.50	27.00	20P	47.50	52.00
11P	25.00	29.50			

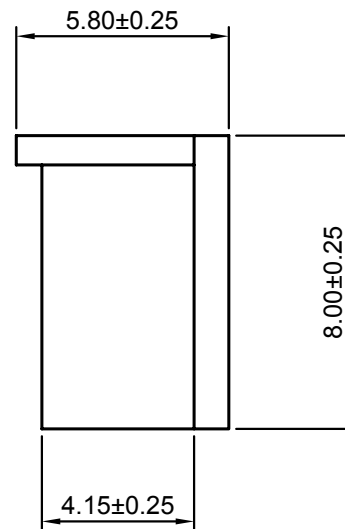

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw BY:	Approved :
LIZQ	GONGYB

General Tolerance

A1	Add color	2015.01.26	x.x≤0.25	ANGLE±
A0	NEW RELEASE	2009.05.10	x.xx≤0.20	
REV	DESCRIPTION	DATE	x.xxx≤0.15	

Title :

2.50mm PITCH

HOUSING

DRAW NO : A2503H-XP

REV
A1