

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-	7553	RELEASED	02/23/07	

APPROVED: _____

DATE: _____ TITLE: _____

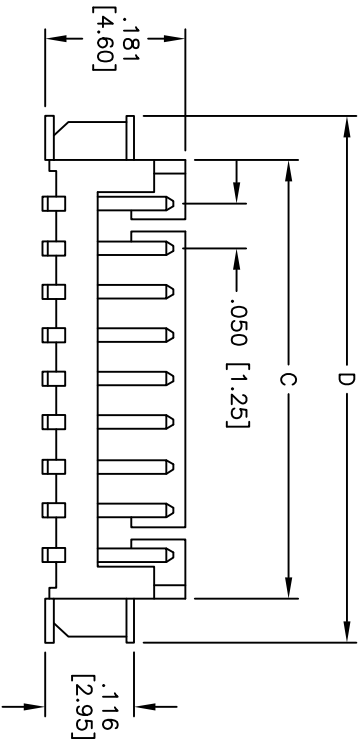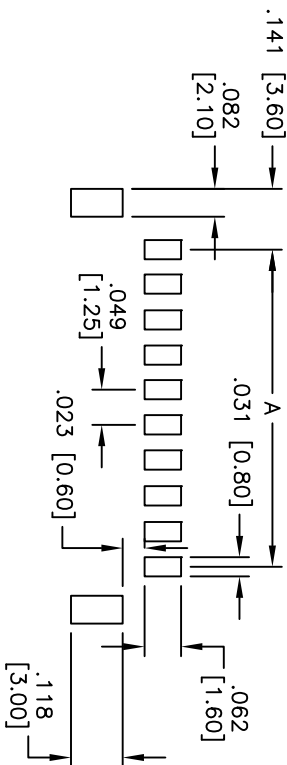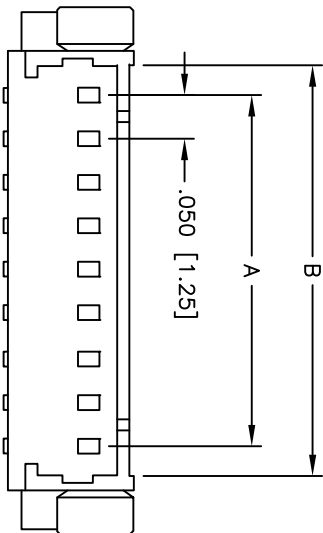

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



A=.049 [1.25] X No. of Spaces
B=.049 [1.25] X No. of Spaces + .070 [1.80]
C=.049 [1.25] X No. of Spaces +.118 [3.00]
D=.049 [1.25] X No. of Spaces + .251 [6.40]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

MX 1.25mm WAFER SMT STRAIGHT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	APPROVALS	DATE		
DRAWN	BW		02/23/07				
CHECKED							
APPROVED							
				SIZE	PART NO.	REV.	
				X	125SH-A-XX-TS-SMT	-	
				REF:	SCALE: NTS	SHEET 1 OF 1	