


0473.750 - 473 Series

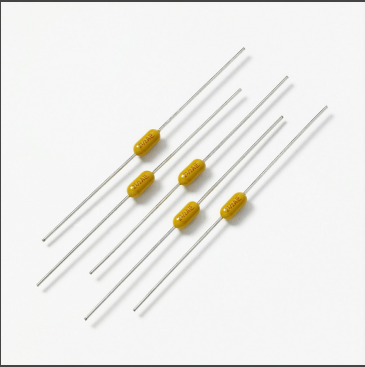

Series: 473

Fuse 473 Datasheet

The PICO® II Slo-Blo® Fuse combines time-delay performance characteristics with the proven reliability of a PICO® Fuse

- Features:
- Enhanced inrush withstand
 - Small size
 - Wide range of current ratings (375mA - 7A)
 - RoHS compliant
 - Wide operating temperature range
 - Low temperature de-rating

Questions? [Contact Littelfuse Support](#)

Check Stock

Order Samples

Feedback

Electrical Characteristics	Technical Resources	Environmental Info
Property (Mouseover for details)	Value	
Ampere Rating (A)	0.75	
Body	Ceramic Body	
Nominal Melting I²T (A²sec)	0.76	
Interrupting Rating	50A@125VDC	
Moisture Sensitivity Level	MIL-STD-202 Method 106	
Min Operating Temp °C	-55	
Max Operating Temp (°C)	125	
Nominal Voltage Drop (mV)	0.429	
Nominal Cold Resistance (Ohms)	0.49	
Opening	Slo-Blo/Time Lag (T)/Time Delay	
Package Size	3.175 x 7.11mm	
VAC (V)	125	
VDC (V)	125	

Connect with Littelfuse

Sign up to receive special offers and news

Enter your email Submit

For more details about how we use your information, check our [Privacy Statement](#).

Mobile Site

- About Littelfuse
- About Littelfuse
 - Conflict Free Statement
 - History
 - Investor Relations
 - Legal
 - Press Room
 - Privacy Statement
 - Supply Chain Transparency
 - Website Feedback

- Explore Littelfuse
- Capabilities Brochures
 - Careers
 - Check Distributor Stock
 - Competitor Cross Reference
 - Industries
 - Order Samples
 - Products
 - Services

- Technical Resources
- Application Designs
 - Education
 - FAQs
 - iDesign™
 - Littelfuse University
 - Product Catalogs
 - Quality Documents
 - Technical Documents

