
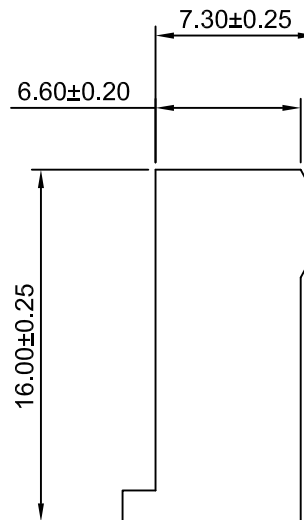
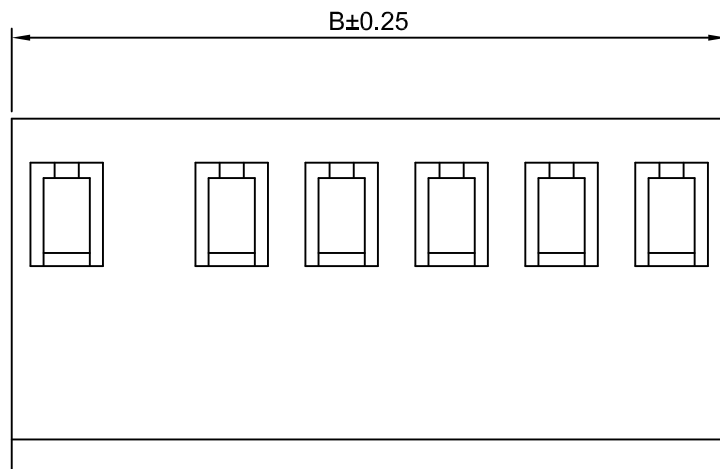


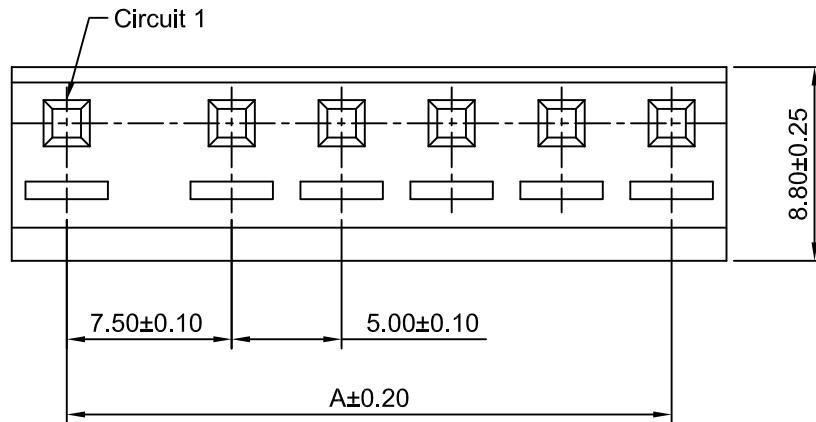

Ordering Information:

A7501H-XP - ** - **
1 2 3

1.Part NO.

2.Material:


(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(Black)

3.Color:

(Blank): see section 2 material

RD: Red



SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	7.50	12.50	5P	22.50	27.50
3P	12.50	17.50	6P	27.50	32.50
4P	17.50	22.50			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	7.50-5.00mm PITCH HOUSING		
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A7501H-XP		A1

A1	CHANGE THE DRAWING	2023.06.10
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE