
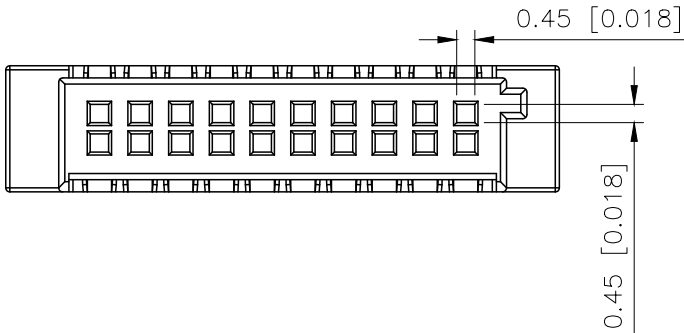
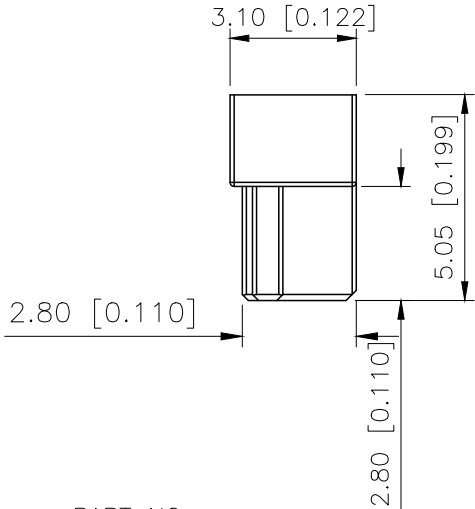
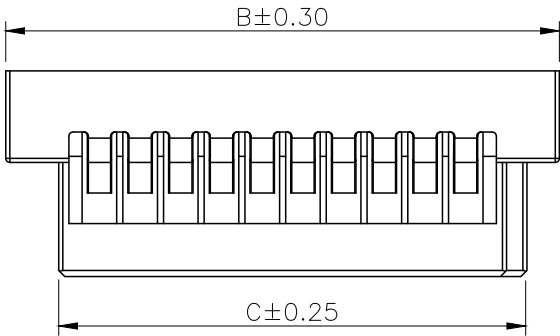
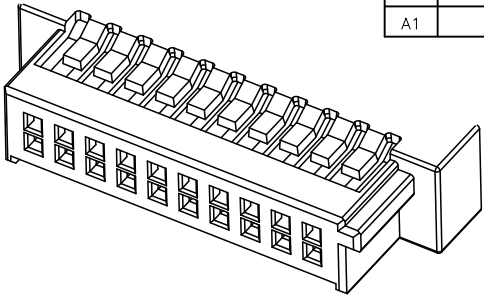


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.26	阿树

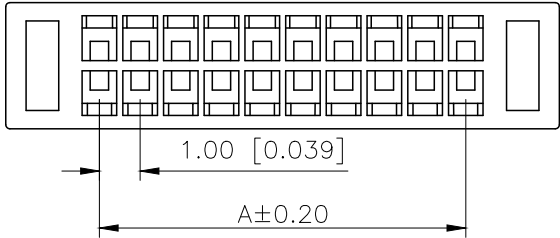

PART NO.:

X1102 H-2xXX-46 XX
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Row No.Pin No:2xXX-2x02~2x25Pin
④Material:46-PA46 UL94V-0
⑤Color:Blank-natural color
BK-Black

Specifications:
规格:
Voltage rating:50V AC/DC
额定电压: 50V AC/DC
Current rating: 1A AC/DC
额定电流: 1A AC/DC
Withstanding voltage:250V AC/minute
耐压电压: 250V AC/分钟
Temperature range:-40℃~+125℃
温度范围: -40℃~+125℃
Insulation resistance:≥100MΩ
绝缘电阻: ≥100MΩ
Contact resistance: ≤20mΩ
接触电阻:≤20mΩ
After environment testing: ≤40mΩ
环境试验后: ≤40mΩ

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
2X03	2.00	6.60	4.00	2X12	11.00	15.60	13.00
2X04	3.00	7.60	5.00	2X13	12.00	16.60	14.00
2X05	4.00	8.60	6.00	2X14	13.00	17.60	15.00
2X06	5.00	9.60	7.00	2X15	14.00	18.60	16.00
2X07	6.00	10.60	8.00	2X16	15.00	19.60	17.00
2X08	7.00	11.60	9.00	2X17	16.00	20.60	18.00
2X09	8.00	12.60	10.00	2X18	17.00	21.60	19.00
2X10	9.00	13.60	11.00	2X25	24.00	28.60	26.00
2X11	10.00	14.60	12.00				

X1102TM-XSN-X	Nylon 46 UL 94V-0	X1102T	X1102W
X1102H-2xXX-46	Nylon 46 UL 94V-0		
PART NO	Material	Suitable XKB Housing	Suitable XKB Wafer

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.00mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X1102H-2xXX-46
APPROVED		SIZE: A4	DWG NO.: