


## 150 mA low quiescent current low noise voltage regulator

Datasheet - production data

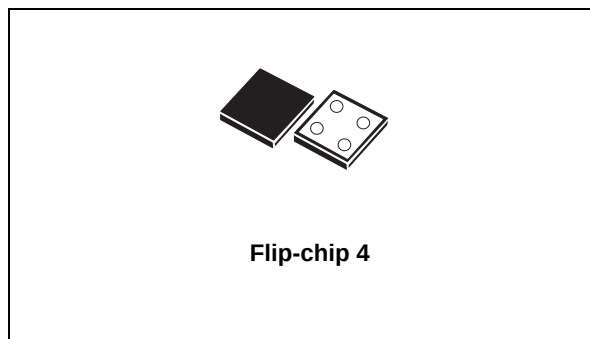

### Features

- Input voltage from 1.5 to 5.5 V
- Ultra low dropout voltage (90 mV typ. at 100 mA load)
- Very low quiescent current (20  $\mu$ A typ. at no load, 35  $\mu$ A typ. at 150 mA load, 1  $\mu$ A max in off mode)
- Low noise (54  $\mu$ V<sub>RMS</sub> from 10 Hz to 100 kHz at V<sub>OUT</sub> = 1.8 V)
- Output voltage tolerance:  $\pm$  2.0% @ 25 °C
- 150 mA guaranteed output current
- Wide range of output voltages available on request: 0.8 V to 4.5 V with 100 mV step
- Logic-controlled electronic shutdown
- Compatible with ceramic capacitor C<sub>OUT</sub> = 1  $\mu$ F
- Internal current and thermal limit
- Flip-chip 4 bumps 1.1 x 1.1 mm.
- Temperature range: -40 °C to 125 °C

### Description

The LD39015J provides 150 mA maximum current from an input voltage ranging from 1.5 V to 5.5 V with a typical dropout voltage of 90 mV. It is stable with ceramic capacitor. The ultra low drop-voltage, low quiescent current and low noise features make it suitable for low power battery powered applications. Power supply rejection is 74 dB at low frequencies and starts to roll off at 10 kHz. Enable logic control function puts the LD39015J in shut-down mode allowing a total current consumption lower than 1  $\mu$ A. The device also includes a short-circuit constant current limiting and thermal protection. Typical applications are mobile phones, personal digital assistant (PDAs), cordless phone and similar battery powered systems.

**Table 1. Device summary**

| Order code  | Output voltage |
|-------------|----------------|
| LD39015J12R | 1.2 V          |

Contents

1      Diagram ..... 3

2      Pin configuration ..... 4

3      Typical application ..... 5

4      Maximum ratings ..... 6

5      Electrical characteristics ..... 7

6      Typical performance characteristics ..... 9

7      Package mechanical data ..... 11


8      Packaging mechanical data ..... 13

9      Revision history ..... 15



# 1 Diagram

Figure 1. Block diagram

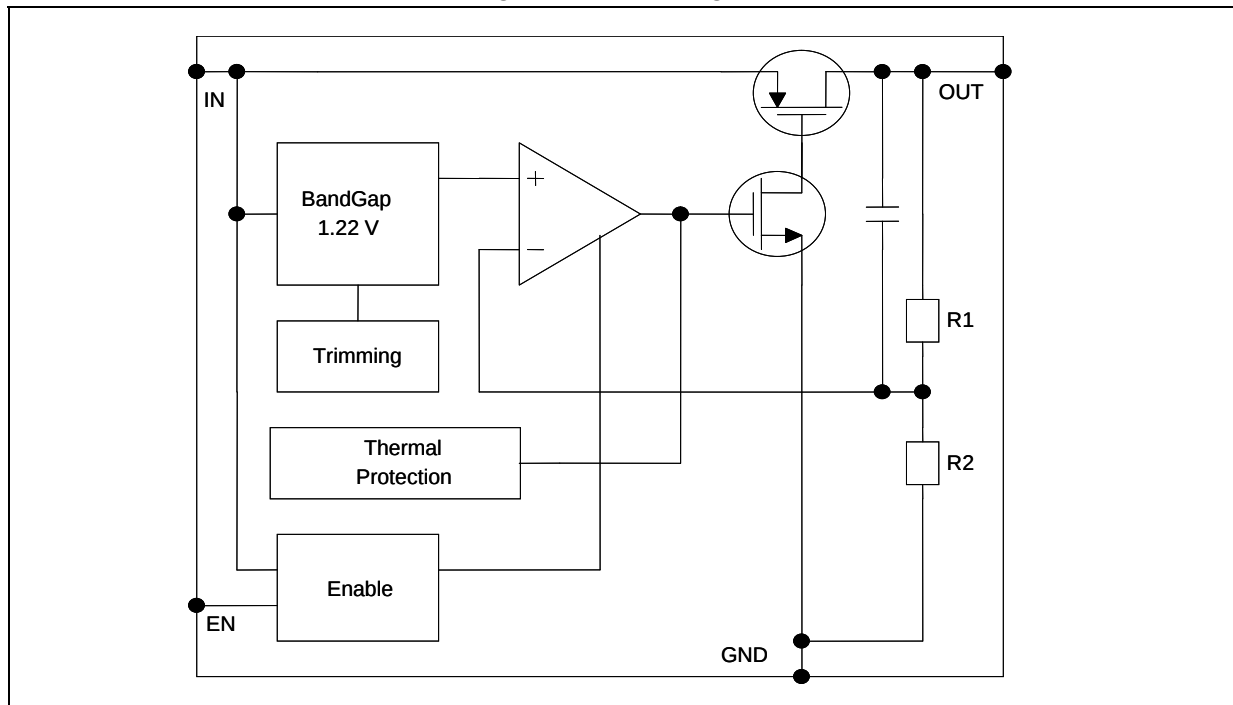

## 2 Pin configuration

Figure 2. Pin connection (top view)


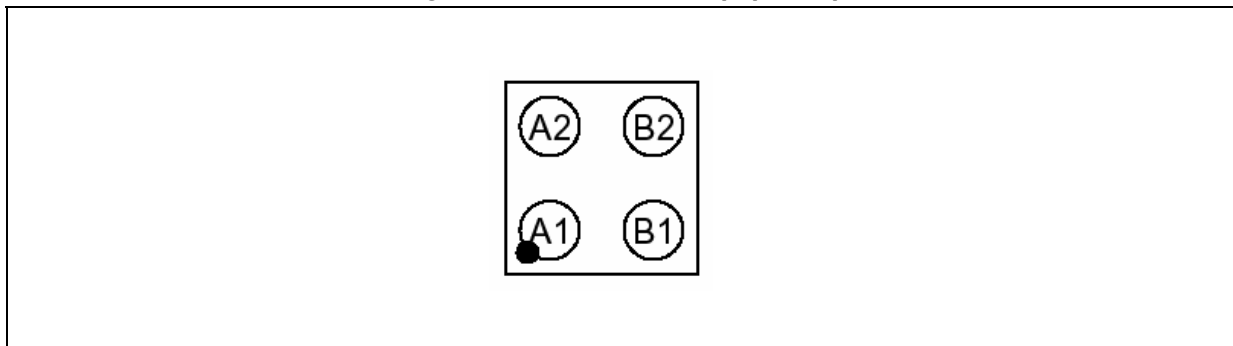


Table 2. Pin description

| Pin n° | Symbol | Function                                          |
|--------|--------|---------------------------------------------------|
| A2     | EN     | Enable pin logic input: Low=shutdown, High=active |
| A1     | GND    | Common ground                                     |
| B2     | IN     | Input voltage of the LDO                          |
| B1     | OUT    | Output voltage                                    |

### 3 Typical application

Figure 3. Typical application circuit

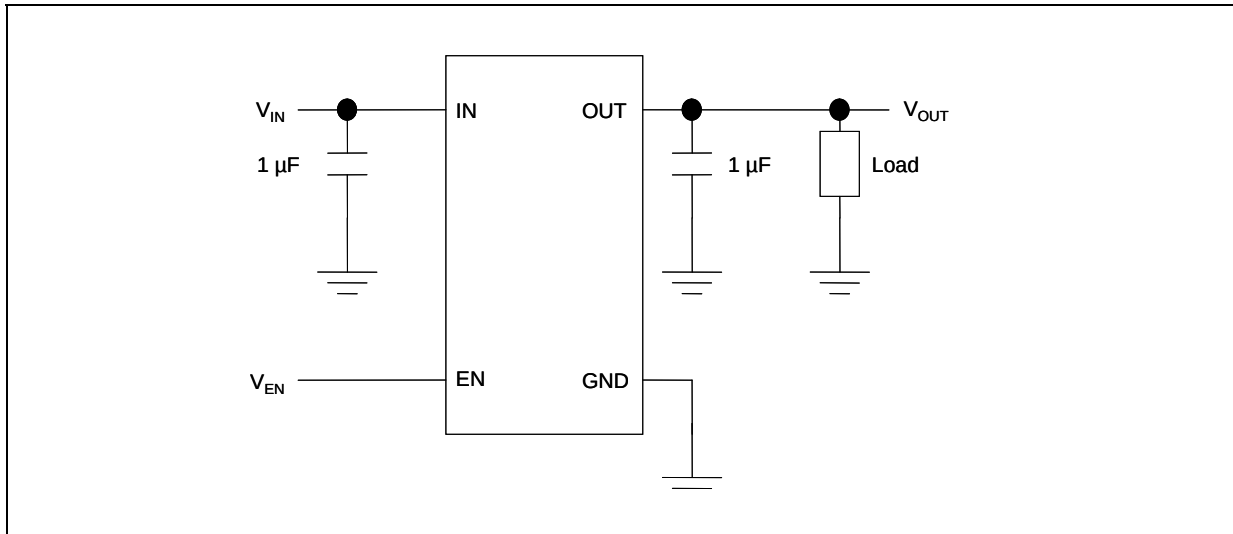

## 4 Maximum ratings

**Table 3. Absolute maximum ratings**

| Symbol    | Parameter                            | Value                | Unit |
|-----------|--------------------------------------|----------------------|------|
| $V_{IN}$  | DC input voltage                     | - 0.3 to 6           | V    |
| $V_{OUT}$ | DC output voltage                    | - 0.3 to $V_I + 0.3$ | V    |
| $V_{EN}$  | Enable input voltage                 | - 0.3 to $V_I + 0.3$ | V    |
| $I_{OUT}$ | Output current                       | Internally limited   | mA   |
| $P_D$     | Power dissipation                    | Internally limited   | mW   |
| $T_{STG}$ | Storage temperature range            | -65 to 150           | °C   |
| $T_{OP}$  | Operating junction temperature range | -40 to 125           | °C   |

*Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. All values are referred to GND.*

**Table 4. Thermal data**

| Symbol     | Parameter                           | Value | Unit |
|------------|-------------------------------------|-------|------|
| $R_{thJA}$ | Thermal resistance junction-ambient | 180   | °C/W |

## 5 Electrical characteristics

$T_J = 25\text{ }^{\circ}\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$ ,  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $V_{EN} = V_{IN}$ , unless otherwise specified.

**Table 5. Electrical characteristics**

| Symbol           | Parameter                                            | Test conditions                                                                                                                 | Min. | Typ.     | Max. | Unit                |
|------------------|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|------|----------|------|---------------------|
| $V_{IN}$         | Operating input voltage                              |                                                                                                                                 | 1.5  |          | 5.5  | V                   |
| $V_{UVLO}$       | Turn-on threshold                                    |                                                                                                                                 |      | 1.45     | 1.48 | V                   |
|                  | Turn-off threshold                                   |                                                                                                                                 | 1.30 | 1.35     |      | mV                  |
| $V_{OUT}$        | $V_{OUT}$ accuracy                                   | $V_{OUT} > 1.5\text{ V}$ , $I_{OUT} = 1\text{ mA}$ ,<br>$T_J = 25\text{ }^{\circ}\text{C}$                                      | -2.0 |          | 2.0  | %                   |
|                  |                                                      | $V_{OUT} > 1.5\text{ V}$ , $I_{OUT} = 1\text{ mA}$ ,<br>$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$       | -3.0 |          | 3.0  |                     |
|                  |                                                      | $V_{OUT} \leq 1.5\text{ V}$ , $I_{OUT} = 1\text{ mA}$                                                                           |      | $\pm 10$ |      | mV                  |
|                  |                                                      | $V_{OUT} \leq 1.5\text{ V}$ , $I_{OUT} = 1\text{ mA}$ ,<br>$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$    |      | $\pm 30$ |      |                     |
| $\Delta V_{OUT}$ | Static line regulation                               | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 5.5\text{ V}$ ,<br>$I_{OUT} = 1\text{ mA}$                                               |      | 0.01     |      | %/V                 |
| $\Delta V_{OUT}$ | Static load regulation                               | $I_{OUT} = 1\text{ mA}$ to $150\text{ mA}$                                                                                      |      | 0.002    |      | %/mA                |
| $V_{DROP}$       | Dropout voltage <sup>(1)</sup>                       | $I_{OUT} = 100\text{ mA}$ , $V_{OUT} > 1.5\text{ V}$<br>$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$       |      | 90       | 130  | mV                  |
| $e_N$            | Output noise voltage                                 | 10 Hz to 100 kHz, $I_{OUT} = 10\text{ mA}$ ,<br>$V_{OUT} = 1.8\text{ V}$ , $V_{IN} = 2.8\text{ V}$                              |      | 54       |      | $\mu\text{V}_{RMS}$ |
| SVR              | Supply voltage rejection<br>$V_{OUT} = 1.5\text{ V}$ | $V_{IN} = V_{OUT(NOM)} + 1\text{ V} \pm V_{RIPPLE}$<br>$V_{RIPPLE} = 0.1\text{ V}$ , freq. = 1 kHz<br>$I_{OUT} = 10\text{ mA}$  |      | 74       |      | dB                  |
|                  |                                                      | $V_{IN} = V_{OUT(NOM)} + 0.5\text{ V} \pm V_{RIPPLE}$<br>$V_{RIPPLE} = 0.1\text{ V}$ , Freq.=10 kHz<br>$I_{OUT} = 10\text{ mA}$ |      | 67       |      |                     |
| $I_Q$            | Quiescent current                                    | $I_{OUT} = 0\text{ mA}$                                                                                                         |      | 20       |      | $\mu\text{A}$       |
|                  |                                                      | $I_{OUT} = 0\text{ mA}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                     |      |          | 40   |                     |
|                  |                                                      | $I_{OUT} = 0$ to $150\text{ mA}$                                                                                                |      | 35       |      |                     |
|                  |                                                      | $I_{OUT} = 0$ to $150\text{ mA}$<br>$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                           |      |          | 50   |                     |
|                  |                                                      | $V_{IN}$ input current in OFF MODE:<br>$V_{EN} = \text{GND}$                                                                    |      | 0.003    | 1    |                     |
| $I_{SC}$         | Short circuit current                                | $R_L = 0$                                                                                                                       | 200  |          |      | mA                  |

Table 5. Electrical characteristics (continued)

| Symbol     | Parameter                   | Test conditions                                                                                                     | Min. | Typ. | Max. | Unit               |
|------------|-----------------------------|---------------------------------------------------------------------------------------------------------------------|------|------|------|--------------------|
| $V_{EN}$   | Enable input logic low      | $V_{IN} = 1.5 \text{ V to } 5.5 \text{ V}$ ,<br>$-40 \text{ }^{\circ}\text{C} < T_J < 125 \text{ }^{\circ}\text{C}$ |      |      | 0.4  | V                  |
|            | Enable input logic high     | $V_{IN} = 1.5 \text{ V to } 5.5 \text{ V}$ ,<br>$-40 \text{ }^{\circ}\text{C} < T_J < 125 \text{ }^{\circ}\text{C}$ | 0.9  |      |      | V                  |
| $I_{EN}$   | Enable pin input current    | $V_{SHDN} = V_{IN}$ , $-40 \text{ }^{\circ}\text{C} < T_J < 125 \text{ }^{\circ}\text{C}$                           |      | 0.1  | 1    | $\mu\text{A}$      |
| $T_{ON}$   | Turn on time <sup>(2)</sup> |                                                                                                                     |      | 30   |      | $\mu\text{s}$      |
| $T_{SHDN}$ | Thermal shutdown            |                                                                                                                     |      | 160  |      | $^{\circ}\text{C}$ |
|            | Hysteresis                  |                                                                                                                     |      | 20   |      |                    |
| $C_{OUT}$  | Output capacitor            | Capacitance (see typical performance characteristics for stability)                                                 | 1    |      | 22   | $\mu\text{F}$      |

1. Dropout voltage is the input-to-output voltage difference at which the output voltage is 100 mV below its nominal value. This specification does not apply for output voltages below 1.5 V.
2. Turn-on time is time measured between the enable input just exceeding  $V_{EN}$  High Value and the output voltage just reaching 95% of its nominal value.

## 6 Typical performance characteristics

Figure 4. Output voltage vs. temperature

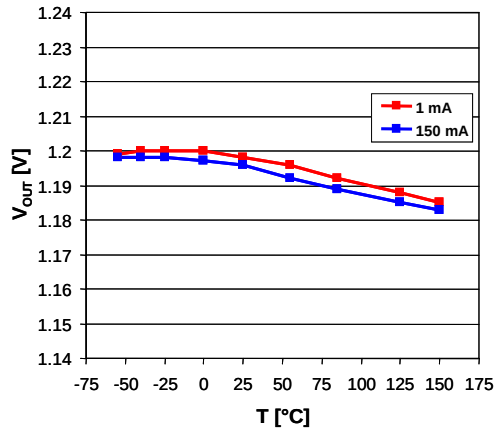


Figure 5. Output voltage vs. input voltage

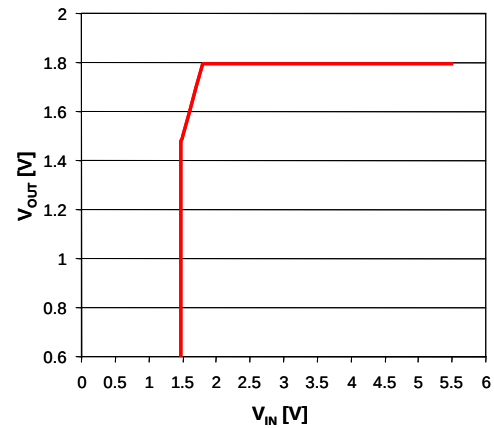


Figure 6. Dropout voltage vs. output current

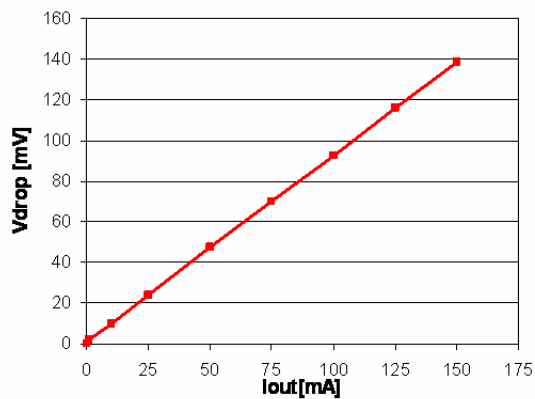
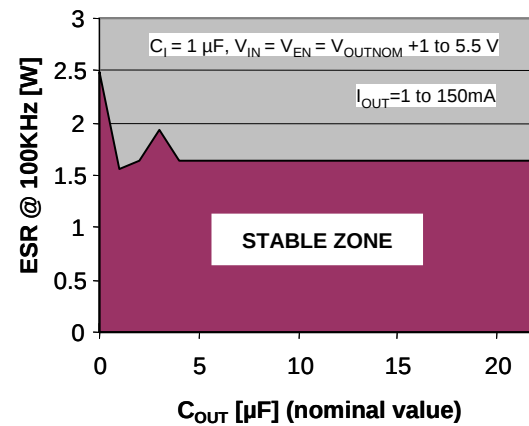
Figure 7. C<sub>OUT</sub> stability region

Figure 8. Supply voltage rejection vs. frequency

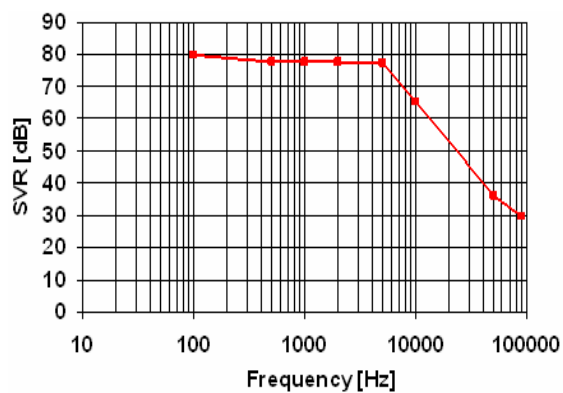


Figure 9. Output noise spectral density

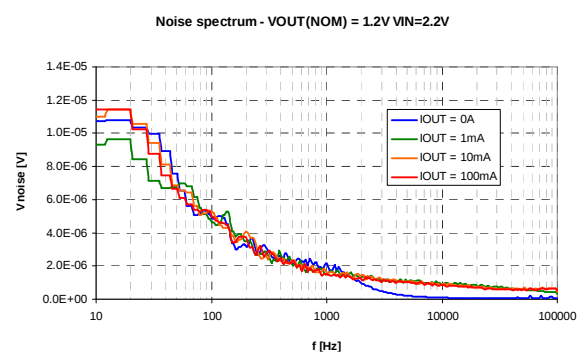


Figure 10. SVR vs. drop

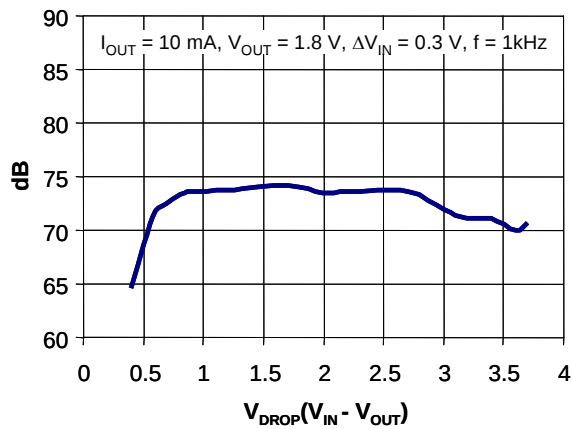
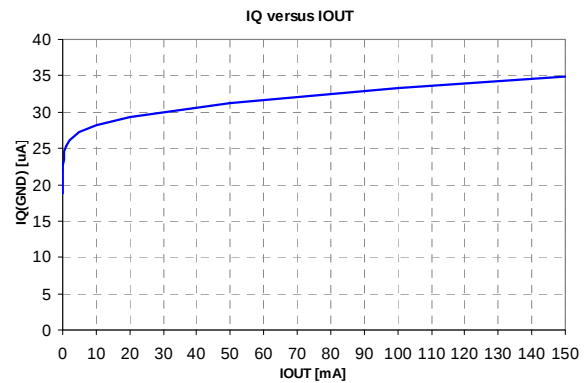
Figure 11. Quiescent current vs.  $I_{OUT}$ 

Figure 12. Quiescent current vs. input voltage



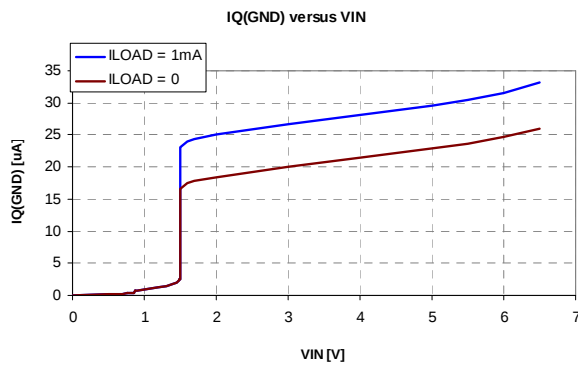


Figure 13. Load transient

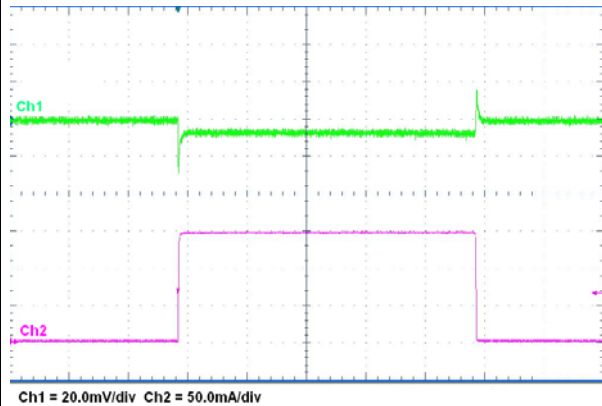


$I_{OUT} = 10 \text{ mA}$  to  $150 \text{ mA}$ ,  $t_r = t_f = 5 \mu\text{s}$

Figure 14. Line transient

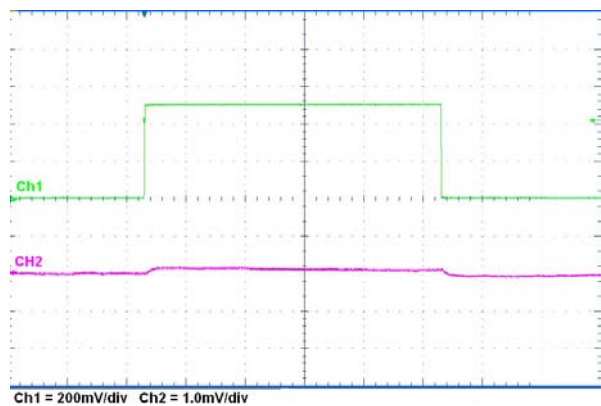

$I_{OUT} = 10 \text{ mA}$ ;  $V_{OUT} = 1.8 \text{ V}$ ;  $\Delta V_{IN} = 0.5 \text{ V}$ ;  $V_{IN}$  = from 2.550 to 3.055V;  $T_r = T_f = 5 \mu\text{s}$

Figure 15. Enable transient

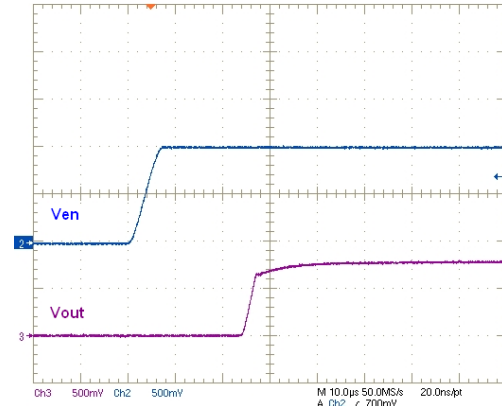

$V_{IN} = 1.5 \text{ V}$ ,  $V_{EN} = 0$  to  $1 \text{ V}$ ,  $I_{OUT} = 1 \text{ mA}$ ,  $C_{IN} = C_{OUT} = 1 \mu\text{F}$

## 7 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

**Figure 16. Flip-chip 4 drawings**

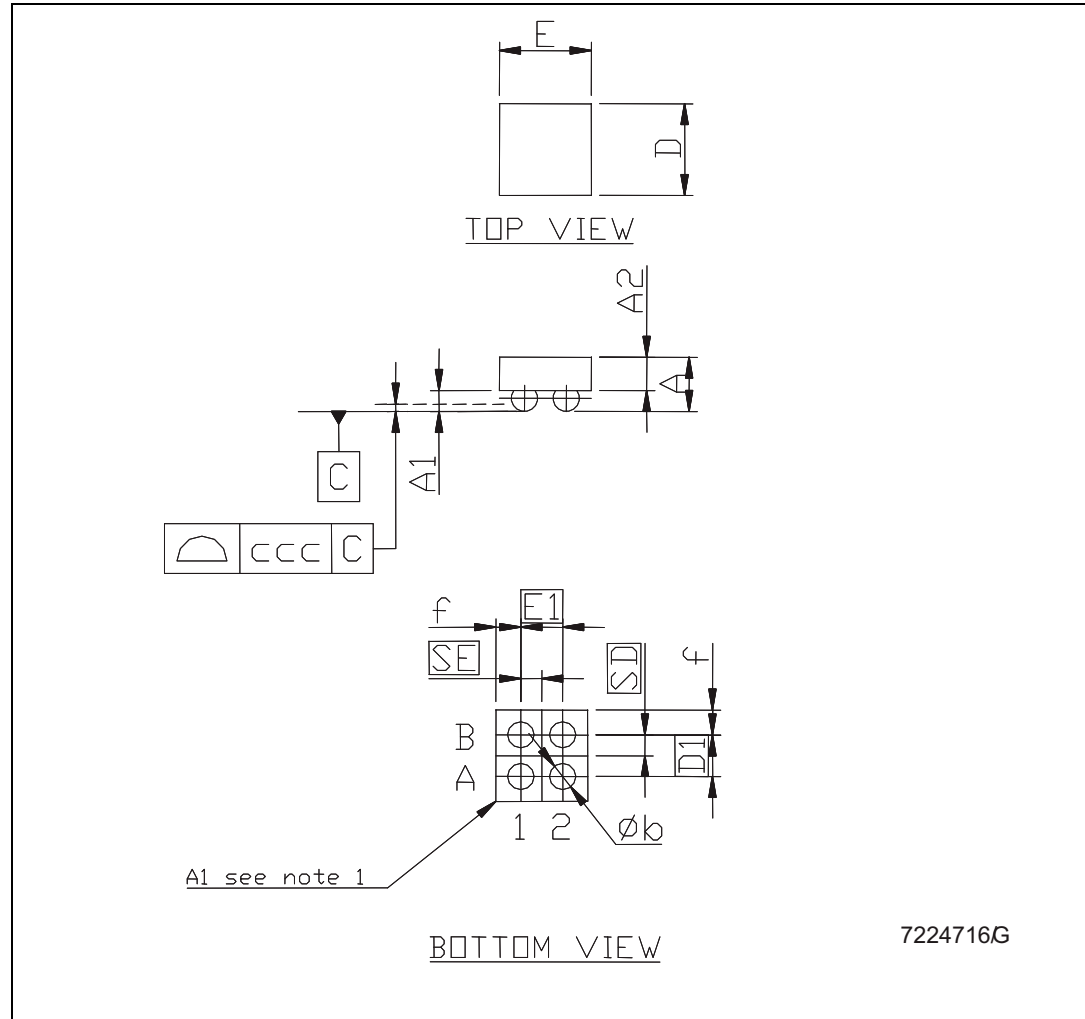


Figure 17. Flip-chip 4 footprint

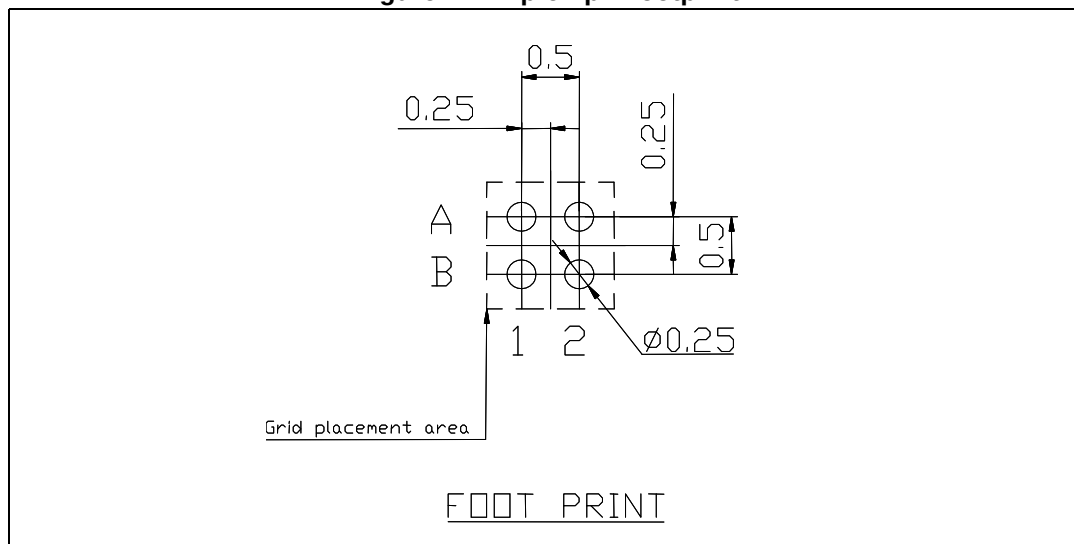


Table 6. Flip-chip 4 mechanical data

| Dim. | mm    |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 0.585 | 0.65  | 0.715 |
| A1   | 0.21  | 0.25  | 0.29  |
| A2   |       | 0.40  |       |
| b    | 0.265 | 0.315 | 0.365 |
| D    | 1.02  | 1.07  | 1.12  |
| D1   |       | 0.5   |       |
| E    | 1.02  | 1.07  | 1.12  |
| E1   |       | 0.5   |       |
| SD   |       | 0.25  |       |
| SE   |       | 0.25  |       |

## 8 Packaging mechanical data

Figure 18. Flip-chip 4 tape and reel drawing

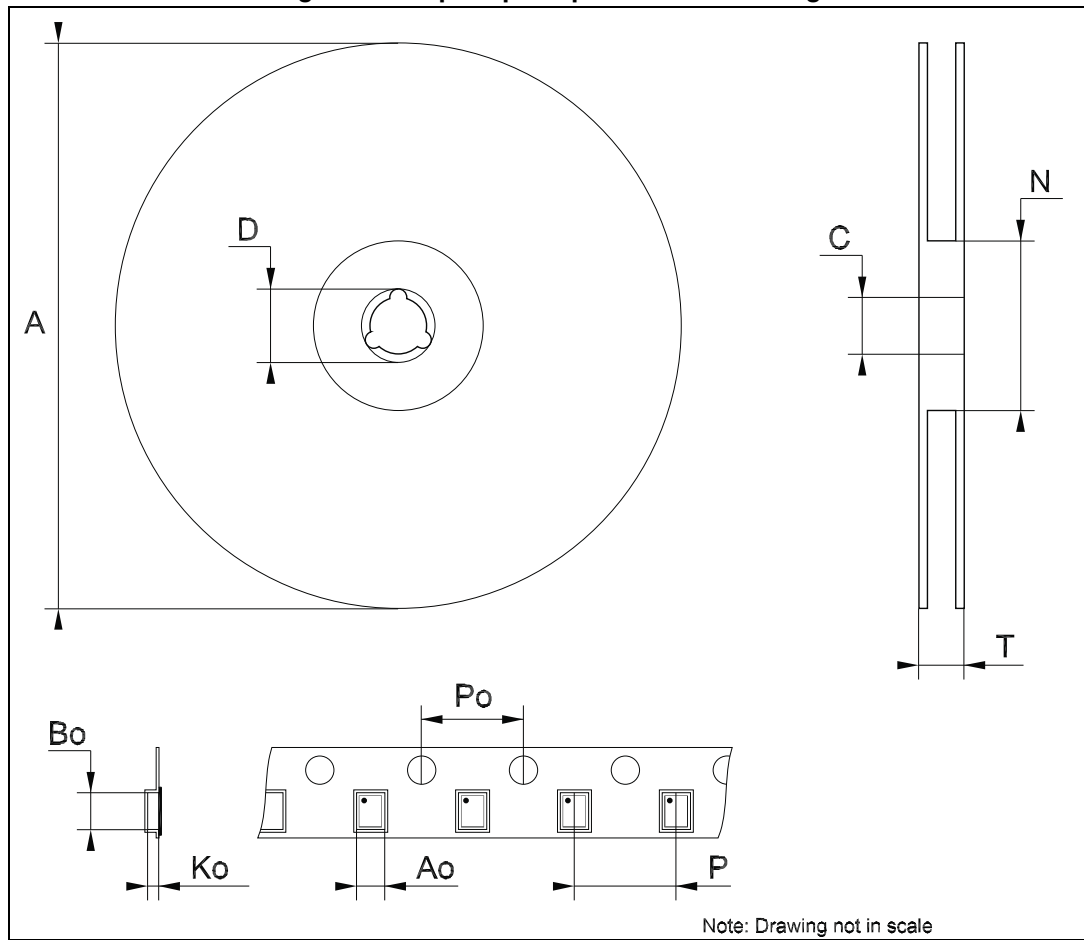


Table 7. Flip-chip 4 tape and reel mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    |      |      | 178  |
| C    | 12.8 |      | 13.2 |
| D    | 20.2 |      |      |
| N    | 59   | 60   | 61   |
| T    |      |      | 8.4  |
| Ao   | 1.12 | 1.17 | 1.22 |
| Bo   | 1.12 | 1.17 | 1.22 |
| Ko   | 0.68 | 0.73 | 0.78 |
| Po   | 3.9  | 4.0  | 4.1  |
| P    | 3.9  | 4.0  | 4.1  |

## 9 Revision history

**Table 8. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                       |
|-------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 29-Jun-2009 | 1        | First release.                                                                                                                                                                                                |
| 05-Aug-2009 | 2        | Updated tape and reel mechanical data.                                                                                                                                                                        |
| 11-Sep-2012 | 3        | Added: new order code LD39015J25R <i>Table 1 on page 1</i> .                                                                                                                                                  |
| 08-Jan-2014 | 4        | Part number LD39015JXX changed to LD39015J.<br>Updated the Description in cover page, <i>Section 7: Package mechanical data</i> .<br>Added <i>Section 8: Package mechanical data</i> .<br>Minor text changes. |
| 23-Aug-2017 | 5        | Updated <a href="#">Table 1: Device summary</a> on the cover page.                                                                                                                                            |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[LD39015J25R](#) [LD39015J12R](#) [LD39015J15R](#) [LD39015J18R](#) [LD39015J28R](#)