




**Part Number :** [1201080252](#)  
**Product Description :** Ultra-Lock (M12) Receptacle to RJ-45 Double-Ended Cordset, 4 Poles, D-Coded, Male (Straight) to Female (Straight), 22 AWG, Shielded PUR Cable, 1.0m (3.28') Length  
**Series Number :** 120108  
**Status :** Active  
**Product Category :** Circular Industrial Cordsets  
**Engineering Number :** ERWPAU7011M010

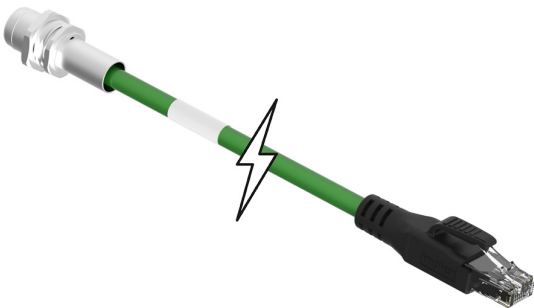


Documents & Resources

**Drawings**  
[1201080252\\_sd.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead per D(2020)4578-DC (25 June 2020)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration

- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	Circular Industrial Cordsets
Series	120108
Description	Ultra-Lock (M12) Receptacle to RJ-45 Double-Ended Cordset, 4 Poles, D-Coded, Male (Straight) to Female (Straight), 22 AWG, Shielded PUR Cable, 1.0m (3.28') Length
IP Rating	IP20, IP67 (M12 only)
Performance Category	5e
Product Name	Industrial Ethernet,Ultra-Lock (M12)
Protocol	EtherNet
Region	America, Asia, Europe
Type	Double Ended
UPC	78172536925

#### Agency

UL	E200650
----	---------

#### Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	30V

#### Physical

Cable Diameter	6.70mm (.264")
Cable Length	1.0m (3.28')
Color - Cable Jacket	Green
Connector End A	Ultra-Lock (M12)
Connector End B	RJ-45 (standard)
Coupling Style	Threaded

Gender	Female-Male
Keyway	D-Coded
LED Indicator	No
Material - Cable Jacket	PUR
Material - Connector Body	PUR
Material - Contact	Copper Alloy
Material - Coupling Nut	Nickel-plated Brass
Material - Plating Mating	Gold
Net Weight	1241.151/g
Orientation	Straight to Straight
Poles	4
Temperature Range - Operating	-20° to +60°C
Wire/Cable Type	Shielded PUR
Wire Size (AWG)	22