


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

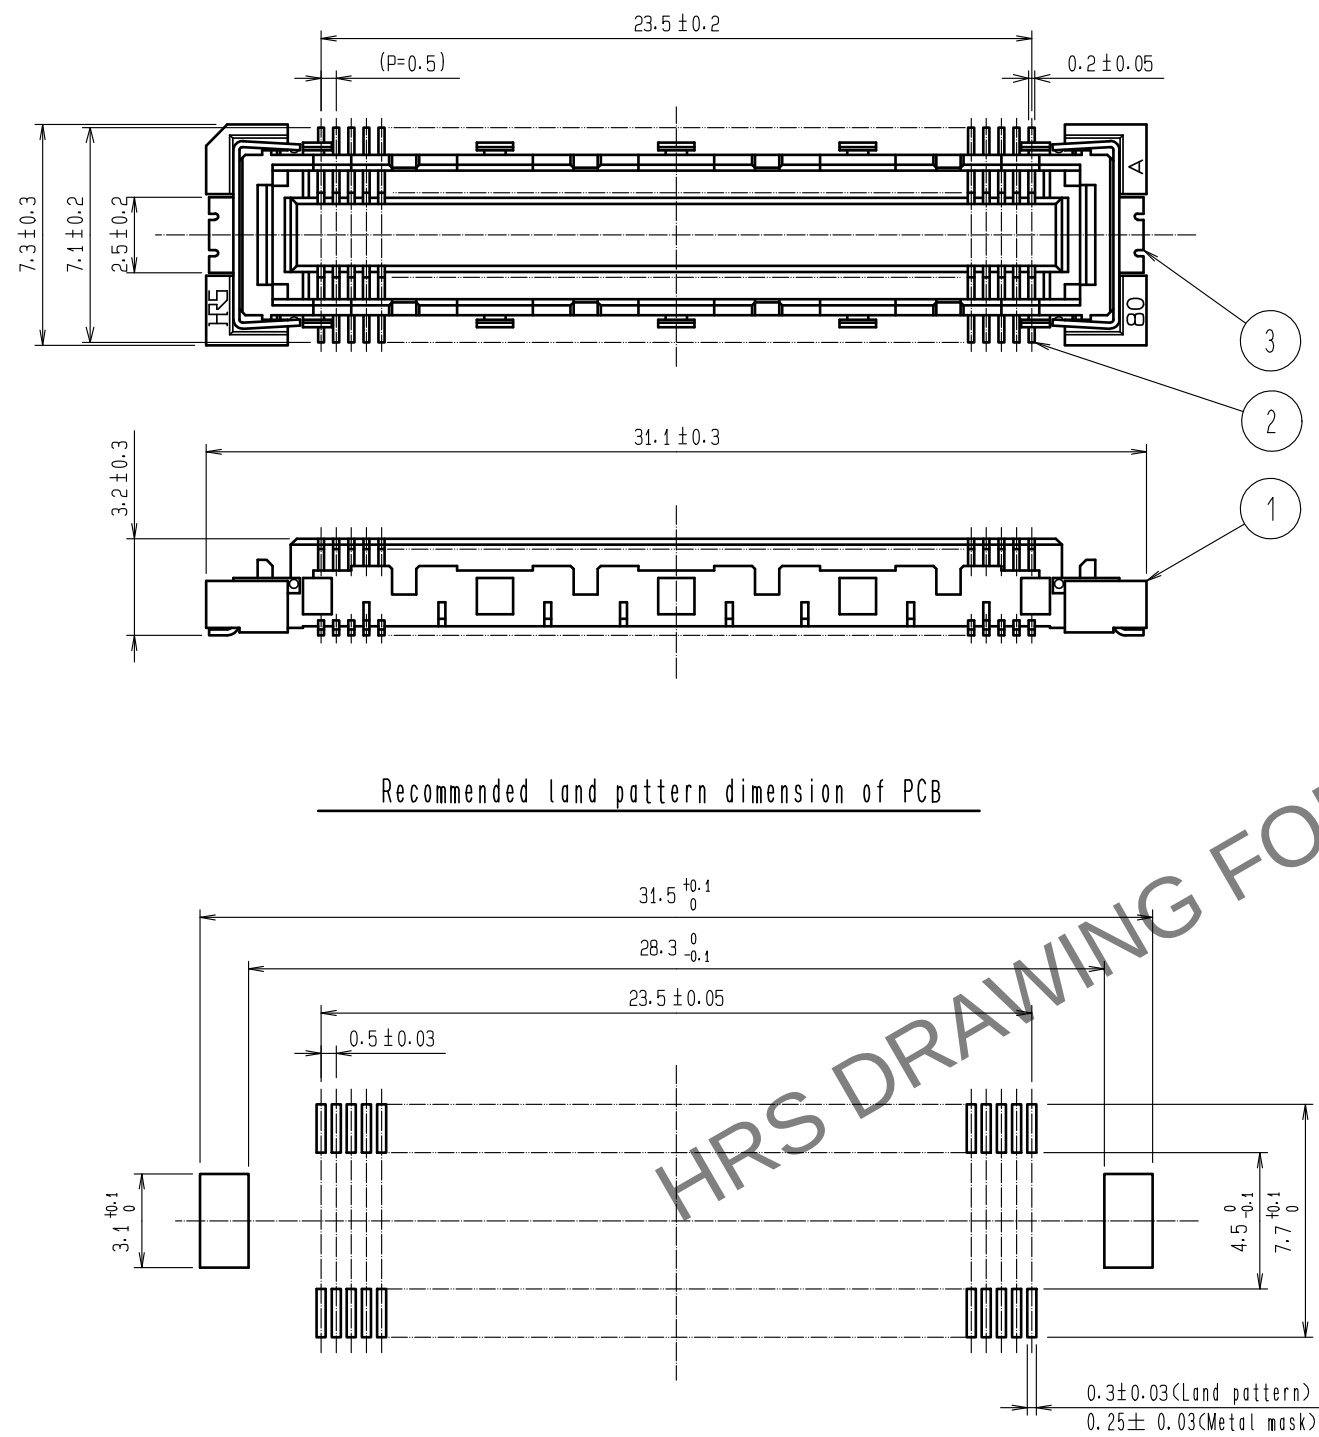


- Notes
- 1 SMT lead - coplanarity : 0.1 max.
  - 2 This product has no polarity to pattern for mounting.
  - 3 Emboss carrier tape package is applied on this product.  
Please refer to the sheet 2/2 for the details.

|                           |                 |                                      |            |                                            |                       |
|---------------------------|-----------------|--------------------------------------|------------|--------------------------------------------|-----------------------|
| 2                         | Phosphor blonze | Contact area : Gold 0.1 $\mu$ m min  | 5          | Polyester                                  | (Top cover tape)      |
|                           |                 | Lead : Gold 0.05 $\mu$ m min         |            |                                            | (Emboss carrier tape) |
|                           |                 | Under plating : Nickel 1 $\mu$ m min |            |                                            |                       |
| 1                         | LCP             | Beige UL94V-0                        | 3          | Phosphor blonze                            | Tin - plating         |
| NO.                       | MATERIAL        | FINISH , REMARKS                     | NO.        | MATERIAL                                   | FINISH , REMARKS      |
| UNITS<br>mm               |                 | SCALE<br>4 : 1                       | COUNT<br>1 | DESCRIPTION OF REVISIONS<br>DIS-F-00011032 |                       |
| HIROSE ELECTRIC CO., LTD. |                 | APPROVED : KJ. KATAYOSE              | 20050105   | DRAWING NO.                                | EDC3-151988-01        |
|                           |                 | CHECKED : HS. OKAWA                  | 20050105   | PART NO.                                   | FX10B-96S-SV(21)      |
|                           |                 | DESIGNED : KT. DOI                   | 20050105   | CODE NO.                                   | CL0570-0251-2-21      |
|                           |                 | DRAWN : KT. DOI                      | 20050105   |                                            |                       |
|                           |                 | DESIGNED : MT. ITANO                 |            | CHECKED : HT. YAMAGUCHI                    | DATE : 20211007       |
|                           |                 | 1/2                                  |            |                                            |                       |

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Drawing for packing (2:1)

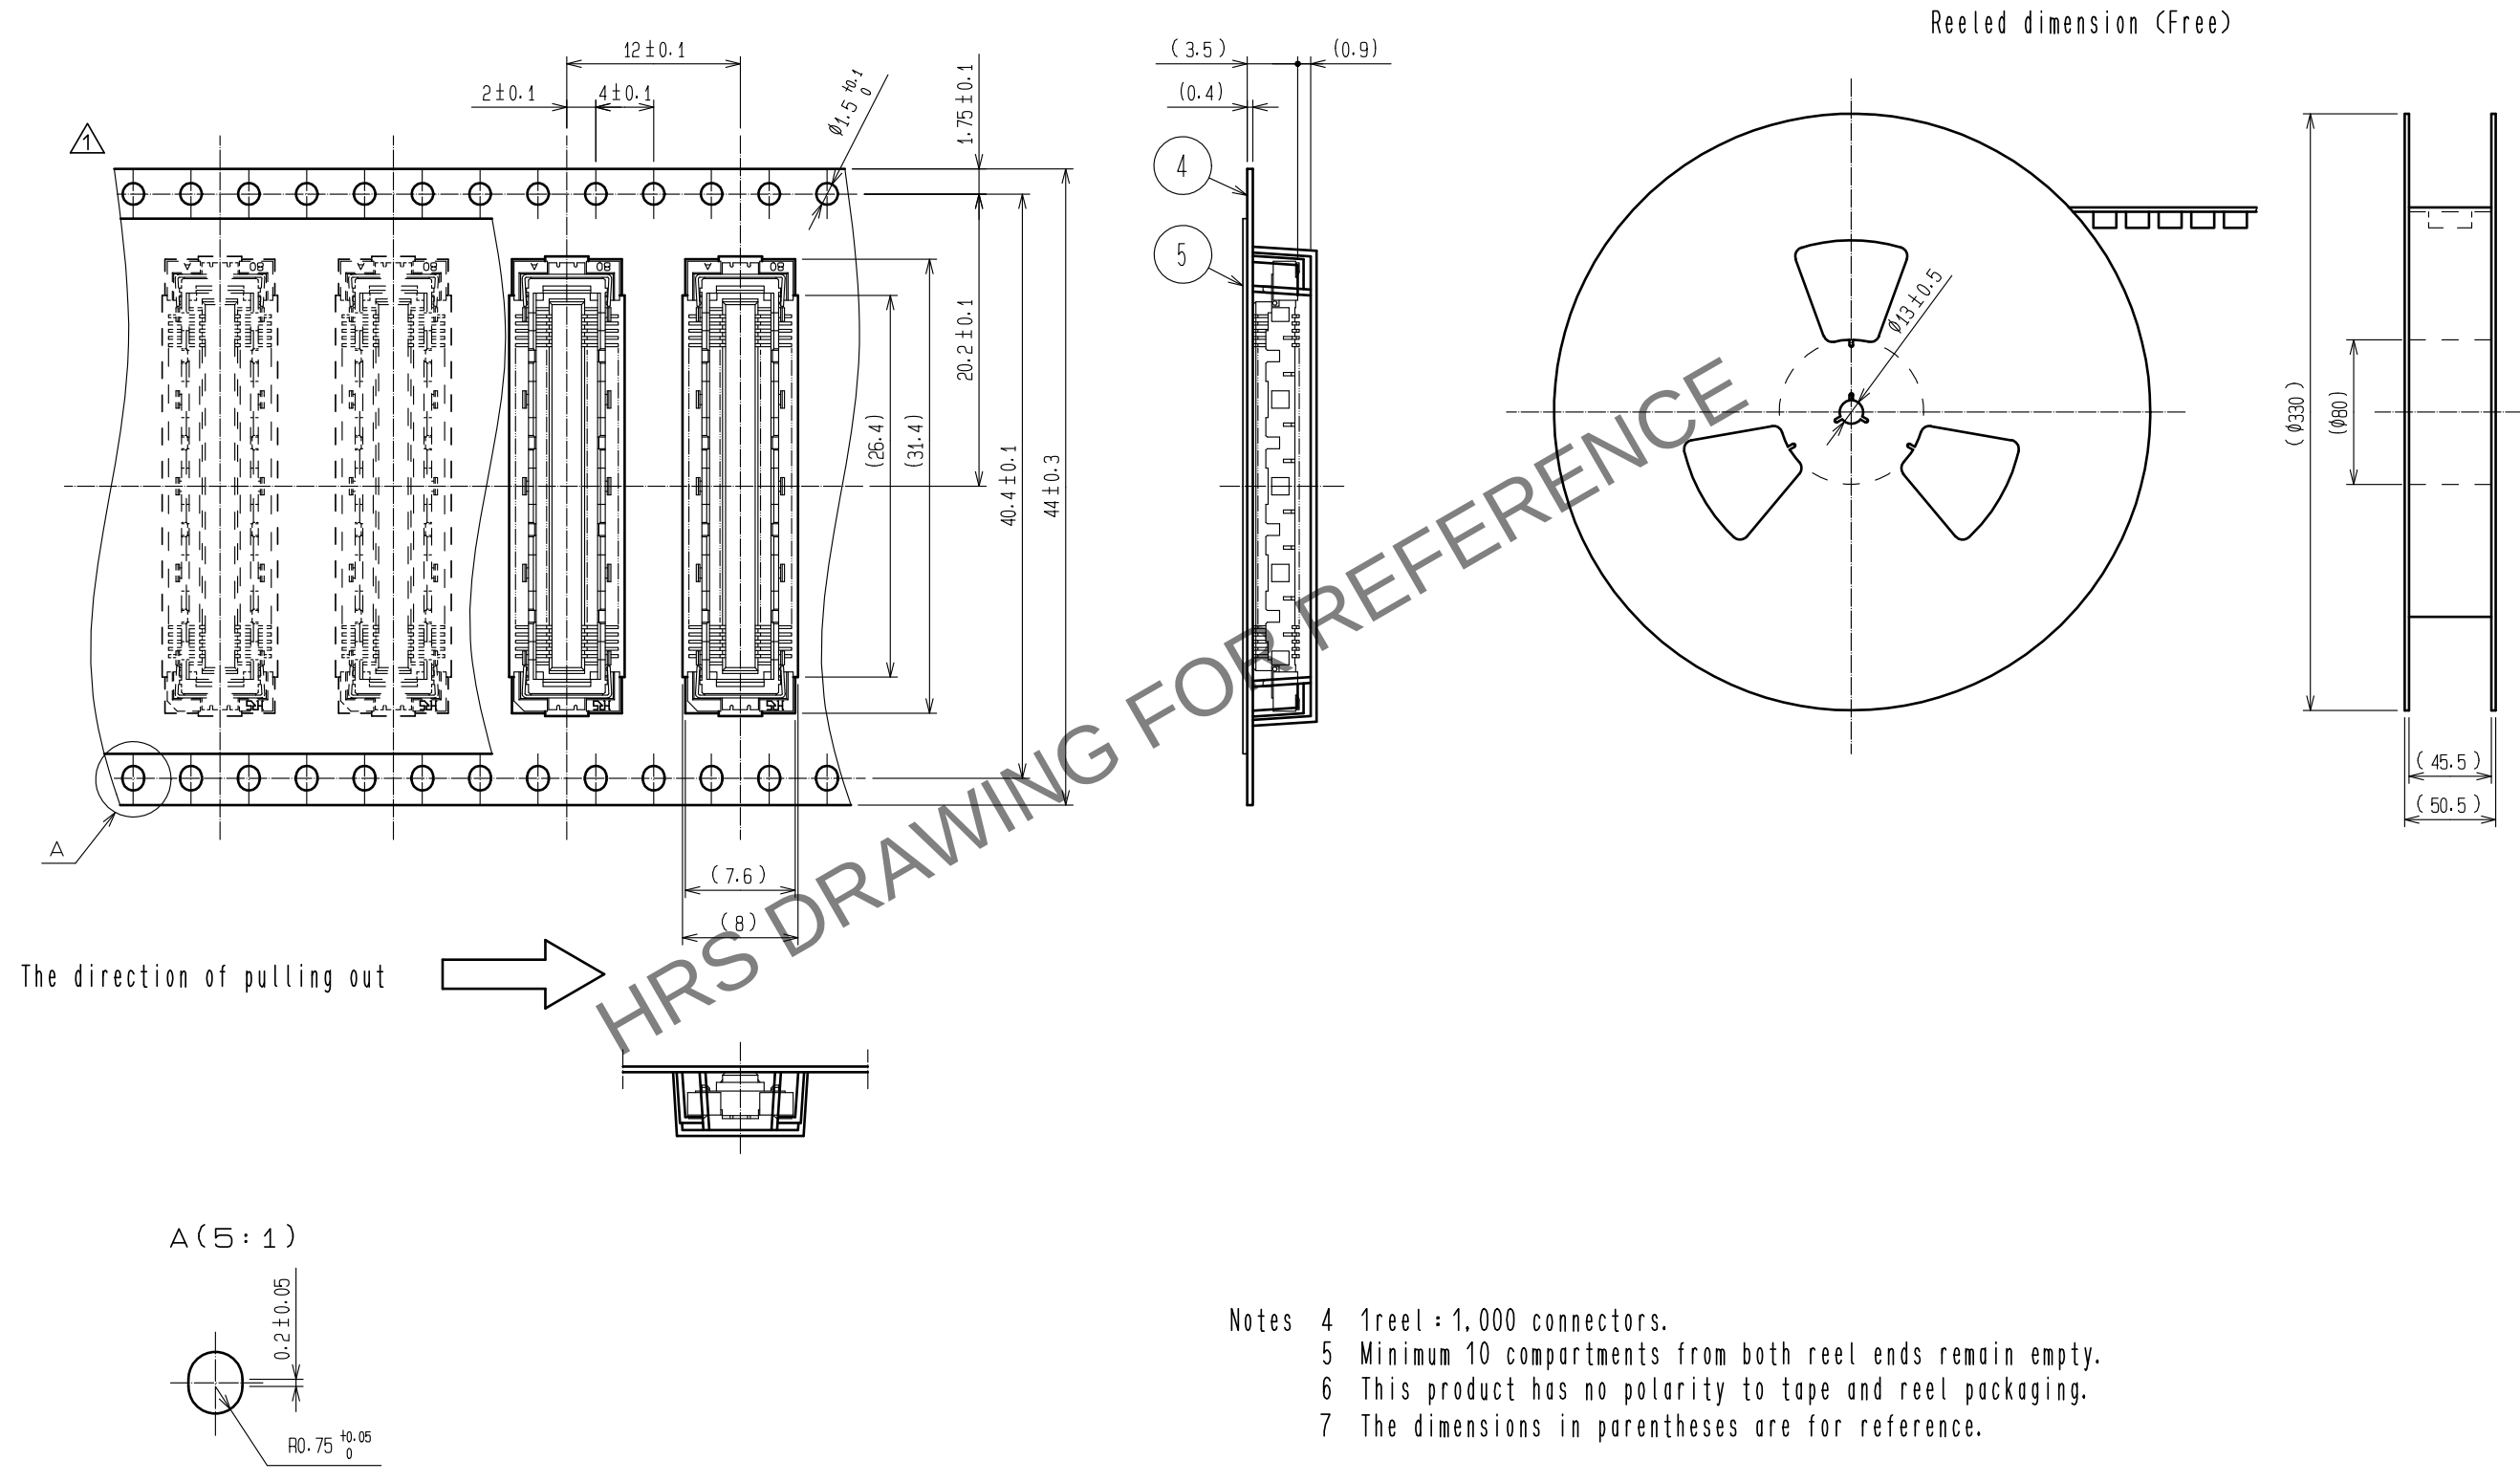

- Notes
- 4 1reel : 1,000 connectors.
  - 5 Minimum 10 compartments from both reel ends remain empty.
  - 6 This product has no polarity to tape and reel packaging.
  - 7 The dimensions in parentheses are for reference.

|     |             |                  |
|-----|-------------|------------------|
| HRS | DRAWING NO. | EDC3-151988-01   |
|     | PART NO.    | FX10B-96S-SV(21) |
|     | CODE NO.    | CL0570-0251-2-21 |