


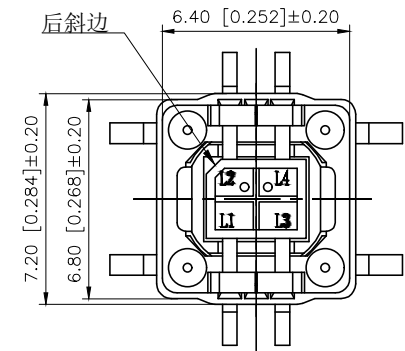
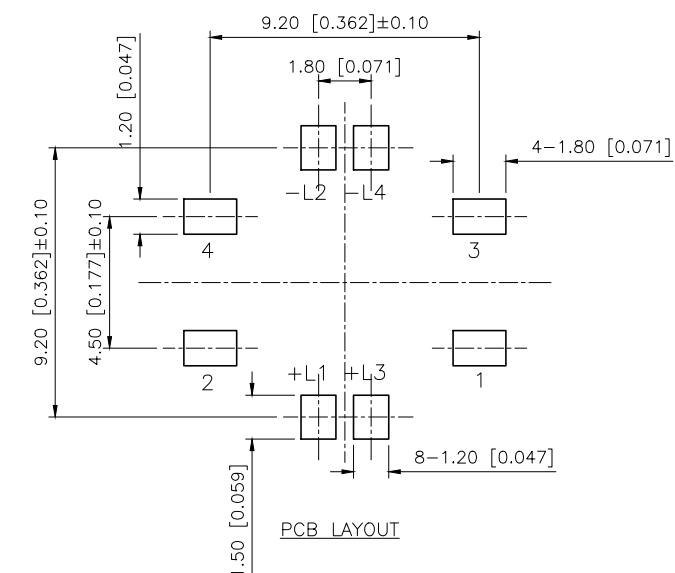


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.24	阿树

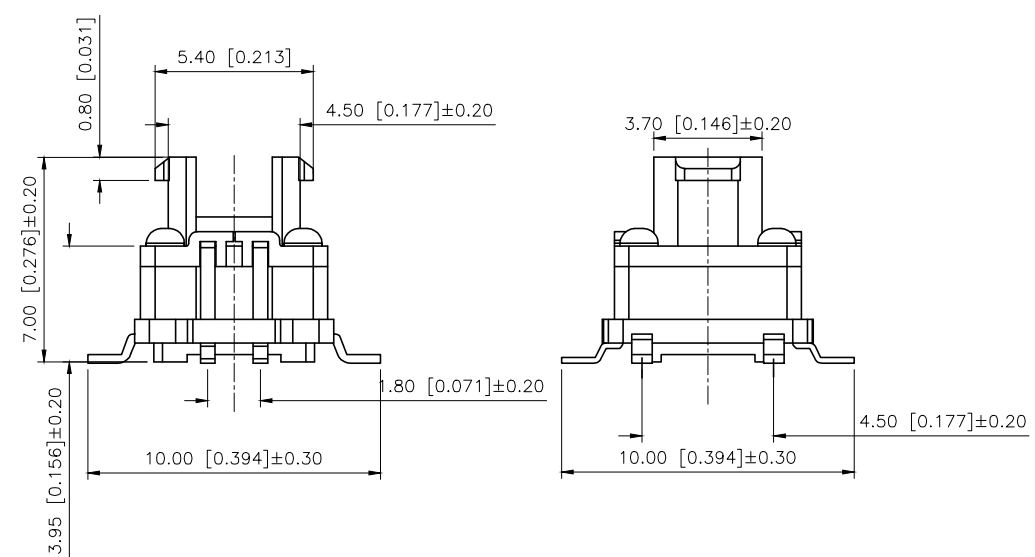

- Specifications (规格):
- 1.Climate Grade(气候等级): -25℃~+75℃
 - 2.Voltage rating(额定电压): 30V DC, 30mA
 - 3.Withstanding voltage(耐压值): ≥250V AC/minute
 - 4.Insulation resistance(绝缘电阻): ≥100MΩ Min
 - 5.Contact resistance(接触电阻): ≤50mΩ Max
 - 6.Life(使用寿命): 100,000 cycles Min
 - 7.Operating force(动作力): 260gf±50gf
 - 8.Salt minst.Test(盐雾测试): 12±1hours

6	Double LED light	1		Transparent	A0708红蓝
5	Double light cover	1	PPA	Black	A0708
4	Double light button	1	PPA	Ceramic white	A0708
3	Shrapnel	1	SUS	Ag Plated	借0601(ø5)
2	Base	1	PPA	Black	A0708
1	Key shares	1	H62	Ag Plated	借A0801
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING/COLOR	Note

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	LED SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	TM-010-M-RBL
APPROVED		SIZE:	A4	DWG NO.:	