


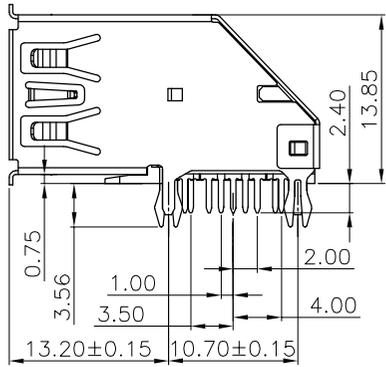


SPECIFICATIONS:
 Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Megohms Minimum.
 Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩ Max for other contacts
 Mechanical Characteristics:
 Mating Force:35 Newtons.Maximum
 Unmating Force:10 Newtons.Mlimum.
 8N Min After Durability

MATERIAL:
 Housing: PBT/LCP
 Contact: copper alloy(T=0.25mm)
 Shell: SUS

PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated
 operating Temperature:-55*to+85*

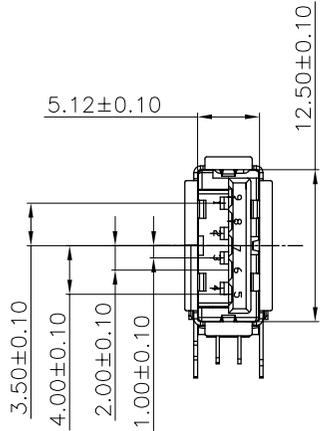

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSTX+

深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)	单位 (UNIT): MM
品名 (ITEM NO) A/F 3.0侧插卷边		版本 (REV)	比例 (SCALE) 1:1
料号 (PART NO) USB3.0-AF-CC-JB		日期 (DATE)	
模号 (MODEL NO)		设计 (DESIGN)	未注公差 TOLERANCE UNSPECIFIED
		审核 (CHECKED)	X.X ±0.30
		核准 (APPROVED)	X.XX ±0.20
			X.XXX ±0.10
			X ±5'
			X.X' ±2'