


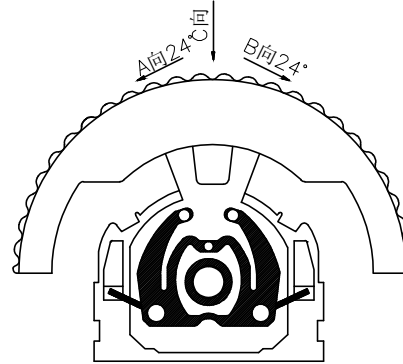
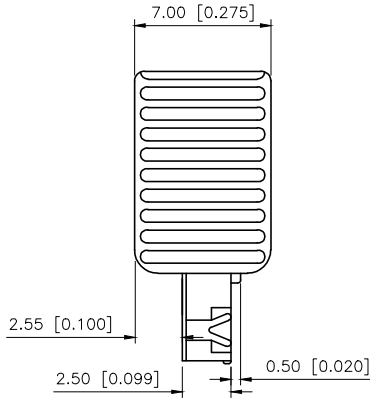



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.25	阿树

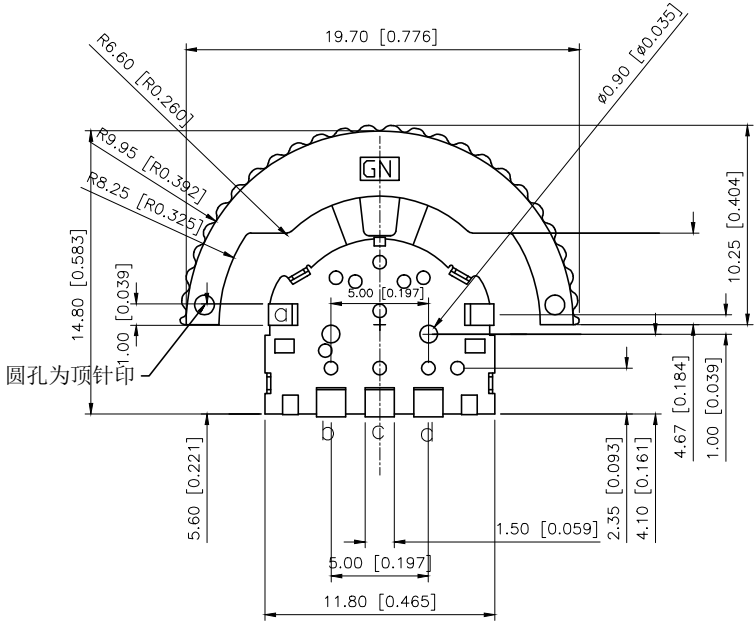

- NOTE:
- 1.Rating: DC 5V 10mA
 - 2.Contact Resistance:100 mΩ MAX
 - 3.Insulation Resistance:100 MΩ MIN
 - 4.Soldering Temper: 260±5°/5s
 - 5.Mechanical Life: 100,000 cycles
 - 6.Ever Portion 80±50gf
 - 7.Push Portion 205±80gf
 - 8.Travel:-24° 0° +24°

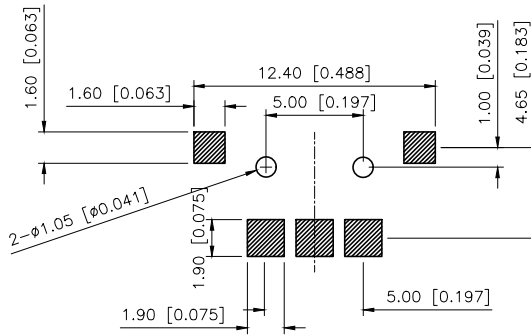

PCB LAYOUT

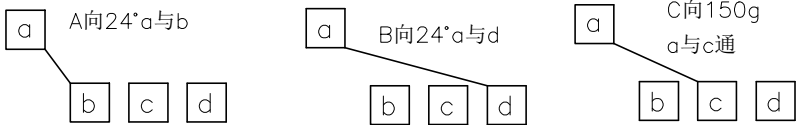

Circuit Diagram

⑤	Terminal	5	Phosphor Bronze	Plating silver
④	Base	1	Lcp	
③	Spring	1	Sus	Natural
②	Cover	1	Sus	Natural
①	Keystone	1	Ppa	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: MULTI-FUNCTIONAL SWITCH
CHECKED		UNIT: mm/in	PART NO.: TM-2011
APPROVED		SIZE: A4	DWG NO.: