

► Heatsinks f.cool

► Cases f.case

▼ Connectors f.con

► Sockets

▼ PCB connectors

■ Male headers

■ Female headers

■ Direct female connectors

■ Jumpers

► IDC-connectors

► D-Sub connectors

■ Brackets for PC

► Optoelectronics

## Male headers


### SL 2 ... / SL 22 ...

#### SL 22 139 18 G

two rows, □ 0.635 mm

Data sheet

add to request

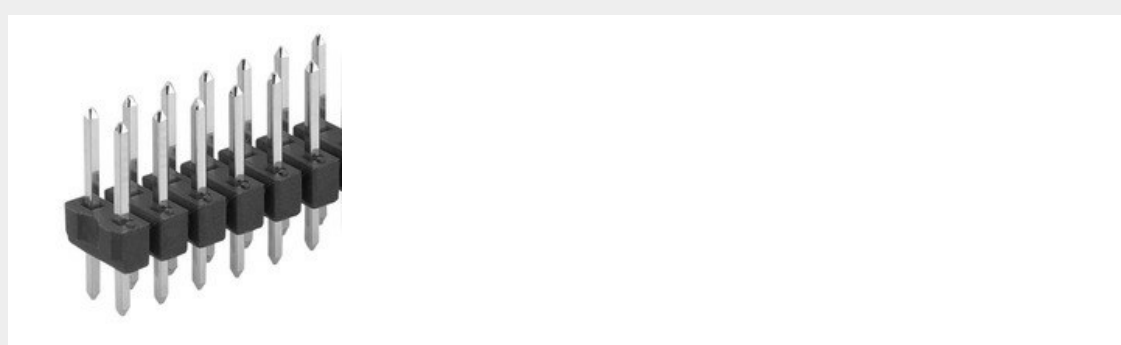

Features

Technical Drawing

Variants

Service

Accessories / related products

|                                |                                 |
|--------------------------------|---------------------------------|
| grid                           | 2.54 mm                         |
| no. of contacts                | 18                              |
| contact material               | CuSn alloy                      |
| surface of contact             | gold-plated                     |
| surface contact /              | Ni+≥0.2µm Au                    |
| contact sleeve                 | Ni+4...6µm Sn                   |
| version                        | standard                        |
| volume resistance              | ≤5 mΩ                           |
| nominal current                | 3 A                             |
| nominal voltage                | 250 V AC                        |
| test voltage                   | 2000 V                          |
| insulating body material       | PA 4.6. GF                      |
| temperature range              | -40°C... +163°C<br>(260°C/10 s) |
| class of flammability          | UL 94 V-0                       |
| specific insulation resistance | >10.0 <sup>70</sup> Ω·m         |
| connection type                | -                               |
| reflow solderable              | yes                             |